


COURT FILE NUMBER 1801 - 06866
COURT COURT OF QUEEN'S BENCH OF ALBERTA
JUDICIAL CENTRE CALGARY

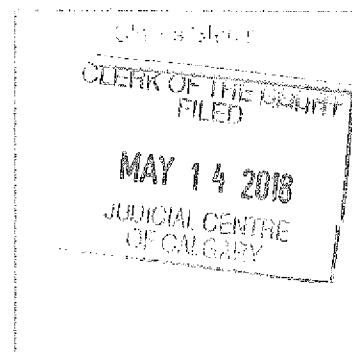

IN THE MATTER OF THE RECEIVERSHIP OF MUSTANG WELL SERVICES LTD., KKSER ENTERPRISES LTD., COMPLETE OILFIELD MANUFACTURING INC., REACTION OILFIELD SUPPLY (2012) LTD. and MRBD LTD.

APPLICANT ATB FINANCIAL
RESPONDENTS MUSTANG WELL SERVICES LTD., KKSER ENTERPRISES LTD., COMPLETE OILFIELD MANUFACTURING INC., REACTION OILFIELD SUPPLY (2012) LTD. and MRBD LTD.

DOCUMENT

AFFIDAVIT

ADDRESS FOR SERVICE AND CONTACT INFORMATION OF PARTY FILING THIS DOCUMENT

GOWLING WLG (CANADA) LLP
Barristers & Solicitors
Tom Cumming
1600, 421 – 7th Avenue SW
Calgary, Alberta, T2P 4K9
Telephone: 403-298-1938
Facsimile: 403-695-3538
Email: tom.cumming@gowlingwlg.com

AFFIDAVIT OF: TRINA HOLLAND Volume 2 of 2 (Tabs L-CC)

SWORN OR AFFIRMED ON: May 14, 2018

I, Trina Holland, of the City of Calgary in the Province of Alberta, SWEAR AND SAY THAT:

1. I am a Director, Turnaround and Restructuring Group, at ATB Financial (“ATB”), and have been directly involved with the accounts of Mustang Well Services Ltd. (“Mustang”), KKSER Enterprises Ltd. (“KKSER”), Complete Oilfield Manufacturing Inc. (“Complete”, which is a successor by amalgamation of Hoedown Equipment Limited (“Hoedown”)) and Reaction Oilfield Supply (2012) Ltd. (“Reaction”, which together with Mustang, KKSER and Complete, are collectively referred to as the “Borrowers”),

whose indebtedness to ATB is guaranteed by MRBD Ltd. (“**MRBD**”, which, together with the Borrowers, are collectively referred to as the “**Debtors**”). I have personal knowledge of the matters and facts hereinafter sworn to, except where stated to be based on information and belief, in which case I believe the same to be true.

2. I am authorized to swear this Affidavit on behalf of ATB in its capacity as lender under the amended and restated letter loan agreement dated July 26, 2017 (the “**Commitment Letter**”) with the Borrowers as borrowers and with each of the Borrowers, MRBD, Michael Kallal (“**Kallal**”) and Royden Wideman (“**Wideman**”) as guarantors (collectively, the “**Guarantors**”), as amended by (i) a letter agreement dated August 10, 2017 (“**Amendment 1**”), (ii) a letter agreement dated October 23, 2017 (“**Amendment 2**”), (iii) a third amendment to loan agreement dated December 15, 2017 (“**Amendment 3**”) and (iv) a fourth amendment to loan agreement dated March 9, 2017 (“**Amendment 4**”). Now shown to me and marked as **Exhibits “A” through “E”** are true copies of the Commitment Letter, Amendment 1, Amendment 2, Amendment 3 and Amendment 4 respectively (the Commitment Letter, as amended, being the “**Loan Agreement**”).

Summary of the Relief Sought

3. This is an application by ATB for Orders:
 - (a) appointing FTI Consulting Canada Inc. (“**FTI**”) as receiver and manager pursuant to section 243(1) of the *Bankruptcy and Insolvency Act*, R.S.C. 1985, c. B-3 (the “**BIA**”), section 49 of the *Law of Property Act*, R.S.A. 2000, c L-7 and section 13(2) of the *Judicature Act*, R.S.A. 2000, c J-2, without security, of all of the assets, undertakings and properties of the Debtors;
 - (b) approving a sale of certain real property of KKSRR (the “**KKSRR Sale**”) and vesting title thereto in the purchaser, free and clear of any financial encumbrances (the “**Approval and Vesting Order**”); and
 - (c) sealing a pre-filing report of FTI in connection with the KKSRR Sale.

Overview of the Debtors’ Business

4. ATB is a financial institution that is formed under the laws of and carries on business in the Province of Alberta (“**Alberta**”).
5. Mustang, Complete, Reaction, MRBD, and KKSRR are private corporations incorporated under the laws of Alberta. Now shown to me and marked as **Exhibit “F”** are true copies the corporate registries for each of these corporations.
6. According to the information provided to me by the Debtors, Wideman and Kallal each own 50% of the voting shares in the capital of, are the directors of, and manage and control Mustang, KKSRR, MRBD, Complete and Reaction. Now shown to me and marked as **Exhibit “G”** is a true copy of the corporate organizational chart prepared in 2014 for these corporations. To the best of my information and belief, based upon

discussions with management of Mustang, the only two changes to the organization of the Debtors since the preparation of this chart are:

- (a) Michael Crawford, a former officer, transferred his 20 voting shares to Wideman and Kallal; and
- (b) Hoedown has since amalgamated with Complete.

7. To the best of my information and belief, based upon discussions with management of the Debtors, the Debtors are servicers to the oil and gas production industry and carry out the following activities:

- (a) Mustang is the main operating entity within the group, owns and operates 12 service rigs and 2 cement units in Alberta, British Columbia and Saskatchewan Mustang;
- (b) Complete manufactures equipment and rigs and operates a repair and maintenance shop for Mustang and certain third party clients. Approximately 43% of Complete's revenue was derived from the other Debtors;
- (c) Reaction supplies oilfield service parts and materials to Mustang, Complete and third party customers and derived approximately 82% of its revenue from Mustang and Complete;
- (d) KKRS holds certain real estate in Camrose on which the fabrication shops and yards of Mustang and Complete are located. It also leases the Debtors' shared office in Calgary. KKSR derived all of its revenue is derived from Mustang and Complete; and
- (e) MRBD is an equipment holding company, owns 4 hybrid service rigs and wireline units known as innovator rigs, and derived all of its revenue from Mustang.

The Loan Agreement

8. The Commitment Letter amended, restated and consolidated into one agreement a series of separate loan agreements between ATB and Mustang dated February 14, 2017 (the "**Original Mustang Loan Agreements**"), between ATB and Mustang dated June 25, 2014, between ATB and KKSR dated August 26, 2016, between ATB and Complete dated August 26, 2016, and between ATB and Reaction dated October 14, 2016, and restructured the credit facilities (collectively, the "**Facilities**", and each a "**Facility**") provided to the Borrowers given the significant deterioration of their businesses and financial condition as a result of the downturn in the oil and gas industry since 2015.
9. Under the Commitment Letter, ATB amended and continued the following Facilities, and made each of the Borrowers jointly and severally liable as principal debtors and co-borrowers thereunder:

- (a) a revolving demand operating credit facility in the maximum principal amount of the lesser of \$4,250,000 and the sum of 75% of good accounts receivable plus \$1,800,000 (“**Facility 1**”);
 - (b) a MasterCard facility available to certain employees of Mustang, in the maximum amount of \$100,000 (“**Facility 2**”);
 - (c) a non-revolving demand credit facility in the principal amount of \$10,635,000, under which interest only was payable until September 15, 2017, and thereafter principal payments of \$116,667 per month plus interest were required (“**Facility 3**”);
 - (d) a revolving operating demand credit facility in the maximum principal amount of \$80,000 (“**Facility 4**”);
 - (e) a non-revolving demand credit facility in the principal amount of \$1,874,276.06 (“**Facility 5**”);
 - (f) a revolving demand operating credit facility in the maximum principal amount of the lesser of \$350,000 and the sum of 75% of good accounts receivable plus 50% of inventory (“**Facility 6**”);
 - (g) a MasterCard facility available to certain employees of Complete, in the maximum amount of \$50,000 (“**Facility 7**”);
 - (h) a revolving demand operating credit facility in the maximum principal amount of the lesser of \$300,000 and the sum of 75% of good accounts receivable plus 50% of inventory (“**Facility 8**”); and
 - (i) a MasterCard facility available to certain employees of Reaction, in the maximum amount of \$50,000 (“**Facility 9**”).
10. Facilities 3 and 5 were fully drawn upon. Mustang could utilize Facility 1 to fund its operations, KKSr could utilize Facility 4 to fund its activities, Complete could utilize Facility 6 to fund its operations, and Reaction could utilize Facility 8 to fund its operations.
11. As of May 9, 2018, the aggregate indebtedness of the Borrowers under the Loan Agreement and the Guarantors under the Guarantees is \$17,520,953.05 (which, together with interest accruing thereon and the costs and expenses of ATB, is referred to as the “**Indebtedness**”).

Security, Guarantees and Registrations

12. The Indebtedness under the Facilities was guaranteed pursuant to the following continuing guarantees:

- (a) continuing guarantee dated April 11, 2017 by MRBD of the liabilities of Mustang to ATB;
- (b) continuing guarantee dated October 15, 2013 by Mustang of the liabilities of KKSR to ATB;
- (c) continuing guarantee dated June 24, 2014 by Mustang of the liabilities of Hoedown (now Complete) to ATB;
- (d) continuing guarantee dated June 24, 2014 by KKSR of the liabilities of Mustang to ATB;
- (e) continuing guarantee dated August 25, 2015 by Hoedown (now Complete) of the liabilities of Mustang to ATB;
- (f) continuing guarantee dated April 11, 2017 by Reaction of the liabilities of Mustang to ATB;

(collectively, the “**Guarantees**”). Now shown to me and marked as **Exhibit “H”** are true copies of the Guarantees.

13. The Indebtedness of the Borrowers and Guarantors was secured by security interests and charges created by the following security documents (collectively, the “**Security Documents**”):

- (a) general security agreement dated March 18, 2013 under which Mustang granted a security interest over all of its present and after acquired-personal property;
- (b) general security agreement dated October 15, 2013 under which KKSR granted a security interest over all of its present and after-acquired personal property;
- (c) land mortgage dated October 15, 2013 (the “**Mortgage**”) in the principal sum of \$2,800,000.00 under which KKSR granted a mortgage and charge over the lands legally described as (i) Plan 9922651, Lot 3, excepting thereout all mines and minerals, having an area of 1.62 hectares (4 acres) more or less; and (ii) Plan 1323928, Block 1, Lot 9 (“**Lot 9**”), excepting thereout all mines and minerals, having an area of 2.44 hectares (6.03 acres) more or less (collectively, the “**KKSR Lands**”);
- (d) general assignment of leases and rents dated October 15, 2013 (the “**GALR**”) by KKSR, assigning to ATB all rights to leases and rents arising from the KKSR Lands;
- (e) general security agreement dated June 24, 2014 under which Hoedown (now Complete) granted a security interest over all of its present and after-acquired personal property;

- (f) general security agreement dated April 30, 2015 under which Reaction granted a security interest over all of its present and after-acquired personal property; and
- (g) general security agreement dated April 11, 2017 under which MRBD granted a security interest over all of its present and after-acquired personal property and a floating charge over all of its lands,

(the general security agreements being collectively referred to as the "GSAs"). Now shown to me and marked as **Exhibit "I"** are true copies of the Security Documents.

14. ATB perfected the security interests created by the GSAs under the *Personal Property Security Act* of Alberta (the "APPSA"), the *Personal Property Security Act* of British Columbia (the "BC PPSA") and the *Personal Property Security Act* Saskatchewan (the "SPPSA") (to the extent that it had activities in those jurisdictions) as follows:
- (a) against the Mustang, as evidenced by search results under the APPSA, the BC PPSA and the SPPSA. Now shown to me and marked as **Exhibits "J", "K" and "L"** respectively are true copies of these search results;
 - (b) against Complete, as evidenced by search results under the APPSA, the BC PPSA and the SPPSA. Now shown to me and marked as **Exhibits "M", "N" and "O"** are true copies of these search results;
 - (c) against MRBD, as evidenced by search results under the APPSA, the BC PPSA and the SPPSA. Now shown to me and marked as **Exhibits "P", "Q" and "R"** are true copies of these search results;
 - (d) against Reaction, as evidenced by search results under the APPSA, the BC PPSA and the SPPSA. Now shown to me and marked as **Exhibits "S", "T" and "U"** are true copies of these search results; and
 - (e) against KCSR, as evidenced by search results under the APPSA, the BC PPSA and the SPPSA. Now shown to me and marked as **Exhibits "V", "W" and "X"** are true copies of these search results.

15. The Mortgage and GALR were registered against title to the KCSR Lands on October 22, 2013 by instrument numbers 132 341 378 and 132 341 379 respectively. Now shown to me and marked as **Exhibit "Y"** is a true copy of the certificates of title from the South Alberta Land Titles Office in respect of the KCSR Lands obtained on May 10, 2018.

Other Secured Creditors

16. *Security against Mustang*. Based upon the search results under the APPSA, BC PPSA and SPPSA, the only parties other than ATB that have registered security interests against Mustang are as follows:
- (a) in Alberta under the APPSA:

- (i) Brightsand Holdings Ltd. ("**Brightsand**"), which has registrations against specific serial number goods of Mustang listed in those registrations;
 - (ii) CWB NL Financial Inc. ("**CWB**"), which has a registration against specific serial number goods of Mustang listed therein;
 - (iii) Element Financial Corporation ("**Element**"), which has a registration in respect of certain personal property leased by Element to Mustang, a registration describing a general security agreement as collateral, and registration against serial number goods of Mustang listed therein;
 - (iv) BDC Capital Inc. ("**BDC**"), which has a registration against specific serial number goods of Mustang and all of Mustang's present and after-acquired personal property;
 - (v) Haymax Energy Inc. ("**Haymax**") and McPhedran Consulting Inc. ("**McPhedran**"), which have a registration against specific serial number goods of Mustang listed therein, registered after ATB;
 - (vi) National Leasing Group Inc. ("**National**"), which has multiple registrations against Mustang relating to industrial and manufacturing equipment, lab testing equipment, computer equipment, software, furniture, telephone systems, shelving systems, connectors and other equipment leased by National to Mustang;
 - (vii) Sterling Crane Procrane Inc. ("**Sterling**"), which has a registration against all of Mustang's present and after acquired personal and real property, but registered after ATB registered its security interest;
 - (viii) Albers Family Holding Corporation ("**Albers**"), which has a registration against serial number goods listed therein, but registered after ATB registered its security interest;
 - (ix) Coil Works Inc. ("**Coil**"), which has a registration is against specific equipment described therein, but registered after ATB registered its security interest; and
 - (x) Diamond International Trucks Ltd. ("**Diamond**"), which has registered a garage keeper's lien against a serial number good identified therein;
- (b) in Saskatchewan under the SPPSA:
- (i) GE Canada Equipment Financing G.P. ("**GECEF**"), which had two registrations against various assets of Mustang, and which management of Mustang advises me relates to indebtedness that has been repaid in full;
 - (ii) GECEF, GE Canada Leasing Services Company, GE Canada Asset Financing Holding Company, GE Technology Finance, GE VFS Canada

Limited Partnership and GE Capital Canada Equipment Financing & Leasing Company, which have a registration against all of Mustang's present and after acquired personal property, and which management of Mustang advises me relates to indebtedness that has been repaid in full; and

(iii) National, which has a registrations equivalent to those summarized in paragraph 16(a)(vi);

(c) in British Columbia under the BC PPSA:

(i) GECEF, which is substantially the same as the registrations equivalent to those referred to in paragraph 16(b)(i) above and which management of Mustang has advised me relates to indebtedness that has been repaid in full; and

(ii) GECEF, GE Canada Leasing Services Company, GE Canada Asset Financing Holding Company, GE Technology Finance, GE VFS Canada Limited Partnership and GE Capital Canada Equipment Financing & Leasing Company, which have a registration equivalent to that described in paragraph 16(b)(ii) and which management of Mustang has advised me relates to indebtedness that has been repaid in full.

17. *Security against Complete.* Based upon the search results under the APPSA, BC PPSA and SPPSA, the only parties other than ATB that have registered security interests against Complete are as follows:

(a) in Alberta under the APPSA is BDC, which has a registration against specific serial number goods of Complete and all of Complete's present and after-acquired personal property;

(b) in Saskatchewan under the SPPSA, there are no other registrations other than those made by ATB;

(c) in British Columbia under the BC PPSA, there are no other registrations other than those made by ATB.

18. *Security against Reaction.* Based upon the search results under the APPSA, BC PPSA and SPPSA, the only parties other than ATB that have registered security interests against Reaction are as follows:

(a) in Alberta under the APPSA

(i) BDC, which has a registration against specific serial number goods of Reaction and all of Reaction's present and after-acquired personal property; and

- (ii) National, which also registered the registrations referred to in paragraph 16(a)(vi) against Reaction;
 - (b) in Saskatchewan under the SPPSA, there are no other registrations other than those made by ATB; and
 - (c) in British Columbia under the BC PPSA, there are no registrations.
19. *Security against MRBD.* Based upon the search results under the APPSA, BC PPSA and SPPSA, the only parties other than ATB that have registered security interests against MRBD are as follows:
- (a) in Alberta under the APPSA is BDC, which has a registration against specific serial number goods of MRBD and all of MRBD's present and after-acquired personal property;
 - (b) in Saskatchewan under the SPPSA:
 - (i) GECEF, which secures indebtedness that management of MRBD has informed me has been repaid in full; and
 - (ii) GECEF, GE Canada Leasing Services Company, GE Canada Asset Financing Holding Company, GE Technology Finance, GE VFS Canada Limited Partnership and GE Capital Canada Equipment Financing & Leasing Company, which relates to indebtedness that management of MRBD has informed me has been repaid in full;
 - (c) in British Columbia under the BC PPSA:
 - (i) GECEF, which secures indebtedness that management of MRBD has informed me has been repaid in full; and
 - (ii) GECEF, GE Canada Leasing Services Company, GE Canada Asset Financing Holding Company, GE Technology Finance, GE VFS Canada Limited Partnership and GE Capital Canada Equipment Financing & Leasing Company, which relates to indebtedness that management of MRBD has informed me has been repaid in full.
20. *Security against KKSR.* Based upon the search results under the APPSA, BC PPSA and SPPSA, the only parties other than ATB that have registered security interests against KKSR are as follows:
- (a) in Alberta under the APPSA is BDC, which has a registration against KKSR's present and after-acquired personal property;
 - (b) in Saskatchewan under the SPPSA, there are no other registrations other than those made by ATB; and

- (c) in British Columbia under the BC PPSA, there are no other registrations other than those made by ATB.
21. I am informed by ATB's counsel that based on the search results described in paragraphs 16 to 20, ATB has prior ranking general security against the personal property of the Debtors, including many of the Debtors' serial number goods, but other secured parties may have prior ranking security interests in specific serial number goods.
 22. Pursuant to a standstill, priority and subordination agreement dated May 11, 2016 between Mustang, KKSR, MRBD, Complete and Reaction as borrowers, ATB and BDC, it was agreed that the security in favour of BDC was subordinate to the security in favour of ATB with respect to all present and after acquired personal property other than intellectual property and insurance proceeds on the lives of Wideman and Kallal, and the security in favour of ATB was subordinate to the security in favour of BDC with respect to intellectual property and such insurance proceeds.
 23. I am advised by counsel that based on the registrations made by the secured parties described above, ATB has first ranking general security as against Mustang, but certain of the other secured parties may have priority with respect to specific assets and serial number goods.

Financial Deterioration of the Debtors

24. The business and financial condition of the Debtors has been severely impacted by the prolonged downturn in the oil and gas markets since 2014 and has not recovered. This was reflected in significant declines in the utilization of their rigs, their revenues and their cash flows between 2014 and 2017, resulting in significant net losses in 2015 and 2017.
25. Management of the Debtors responded to the downturn and to price reductions by their competitors by reducing their costs. Notwithstanding these cost reductions and a favourable utilization rate relative to industry averages, their cost structure has continued to be higher than their competitors.
26. In early 2017, the Debtors continued to suffer serious cashflow shortfalls and therefore requested that ATB permit Mustang to draw up to \$1,800,000 in excess of its borrowing base margin, and to pay interest only under Facility 3 until September 15, 2017. ATB agreed to those changes and incorporated them into the Commitment Letter in early July of 2017.
27. In late July of 2017, the Debtors again approached ATB to request a temporary increase in the maximum principal amount available under Facility 1 from \$4,250,000 to \$4,750,000. This change was included in Amendment 1 on August 10, 2017.
28. Mustang was unable to reduce the amount outstanding under Facility 1 within the new limit therefore on October 23, 2017, ATB and the Debtors entered into Amendment 2. Under Amendment 2, the \$1,800,000 bulge in Facility 1 was transferred to Facility 3 and the Debtors agreed that the maximum principal amount available under Facility 1 would be reduced to \$2,950,000 until December 15, 2017, whereupon it would further reduce to

\$2,450,000. Mustang's obligation to make monthly principal payments under Facility 3 of \$116,667 was confirmed, with a lump sum payment of \$4,730,000 on March 31, 2018. The Debtors were also required to take steps to sell their property and assets in order to permit the paydown of the Indebtedness.

29. In December of 2017, management of the Debtors again requested an increase in the maximum amount available under Facility 1 from \$2,950,000 to \$3,600,000, which increase would continue until March 5, 2018, whereupon it was to reduce to \$2,450,000. ATB agreed to this change and it was incorporated into Amendment 3.
30. In late February of 2018, management advised ATB that they would be unable to reduce the amount outstanding under Facility 1 on March 5, 2018 to be within the \$2,450,000 limit. ATB agreed on March 9, 2018 in Amendment 4 to increase the maximum limit \$4,750,000 until April 2, 2018, reducing to \$4,500,000 until April 23, 2018, further reducing to \$2,450,000 until April 30, 2018, and further reducing to \$2,450,000 thereafter. The Debtors were also required to retain a financial advisor to establish and run a sale process (the "Sale Process") under which a data room was to be created by March 23, 2018, non-definitive expressions of interest were due on April 13, 2018, non-definitive letters of intent were due on or before May 11, 2018, and definitive agreements were due May 25, 2018, to be closed by no later than June 30, 2018.
31. In the period since March 9, 2018, the accounts receivable of Mustang have deteriorated such that the current amount outstanding under Facility 1 exceeds the 75% of good accounts receivable by approximately \$1,700,000.
32. At the end of April, 2018, management of the Borrowers requested ATB to amend the Loan Agreement again to increase the maximum limit on Facility 1 to \$4,200,000. ATB was unwilling to agree to yet another increase.
33. As of May 9, 2018,
 - (a) the principal amount outstanding under Facility 1 was \$3,250,000, which exceeded the maximum limit of \$2,450,000 by \$800,000, and as a result of a precipitous decline in the accounts receivable of Mustang, exceed the 75% margin by \$1,700,000, as a result of which Mustang has no ability to make further draws to fund its operations;
 - (b) Facility 3 was not reduced by a lump sum payment of \$4,730,000 on March 31, 2018;
 - (c) the principal amount outstanding under Facility 6 was \$350,000 and therefore Complete has no ability to make further draws to fund its operations;
 - (d) the capital expenditures of Mustang for the fiscal year ending December 31, 2017 were \$672,910, whereas under section 11(b) of the Loan Agreement, the Borrowers and Guarantors covenanted and agreed that Mustang would not expend more than \$650,000 in any fiscal year on capital expenditures; and

- (e) on December 31, 2017, the actual EBITDA (as defined in the Loan Agreement) was \$2,189,742 and the forecast EBITDA was \$2,750,000, which actual EBITDA was approximately 79.6% of the forecasted EBITDA, whereas under section 11(c) of the Loan Agreement, the Borrowers and Guarantors covenanted and agreed that Mustang would not permit actual EBITDA to fall below 85% of forecasted EBITDA on a year to date basis.
34. The limits on the amounts outstanding under Facilities 1 and 6 have been exceeded and Mustang's working capital has been significantly reduced because of the onset of Spring break up, where new accounts receivable are typically limited.
35. Mustang engaged Sageworth Partners Inc. ("**Sageworth**") by letter agreement dated February 26, 2018 to act as its financial advisor in connection with the Sale Process. Sageworth is a boutique firm which provides consultation and marketing services in relation to sale processes for mid-market businesses. Mustang directed Sageworth to keep ATB up-to-date with respect to the progress of the Sale Process. According to information provided to me by Sageworth, Sageworth sent sales packages to 79 parties that were in the Debtors' industry. Sageworth received seven (7) expressions of interest, of which only one was on a going concern basis. Sageworth has informed me that the one going concern expression of interest has been withdrawn. None of the remaining expressions of interest, were they to become definitive agreements of purchase and sale which were completed, would generate proceeds sufficient to repay the Indebtedness.
36. Based on my discussions with management of the Debtors, the Debtors currently has 6 employees in its office and 25 contractor workers in the field, whereas in January of 2018, Mustang had approximately 25 employees and 80 contractors in the field. All or substantially all of these employees and contractors are or were employed or contracted by Mustang. Mustang is now operating only one rig and the Debtors' operations are at a minimum. There is a payroll of approximately \$150,000 due on May 21, 2018 and they do not have sufficient funds to pay it.
37. The Debtors also owe municipal realty taxes to Camrose County which appear to rank in priority to the security interests and charges created by the Security Documents. In particular as of May 7, 2018, KKSR was \$111,261.42 in arrears of payment of municipal taxes to Camrose County in respect of KKSR lands, and a tax recovery notice was filed against title thereto by Camrose County, indicating that if arrears were not paid within a year, Camrose County would offer the KKSR lands for sale at public auction in order to recover the tax arrears. Neither Mustang, KKSR nor the other Debtors have funding available to them with which to pay these arrears and as a result the security position of ATB is declining.


Demand and Application to appoint Receiver

38. The Facilities remain due and payable on demand by ATB. Given the continuing deterioration in the financial position of the Debtors, the absence of potential transactions arising from the Sale Process that could result in the repayment of the Indebtedness, and the deteriorating security position of ATB, ATB is not willing to continue to fund the

operations of the Debtors or to forbear from enforcing its rights and remedies under the Loan Agreement and the Security Documents.

39. By letter dated May 10, 2018, ATB issued a letter to the Debtors demanding repayment in full of the Indebtedness and terminating the Facilities (the "**Demand Letter**") together with a notice of intention to enforce security under section 244(1) of the BIA (the "**244 Notice**"). Attached hereto and marked as **Exhibits "Z" and "AA"** are copies of the Demand Letter and the 244 Notice.
40. On May 12, 2018, after receipt of the Demand Letter and 244 Notice, the Debtors signed a consent to the immediate enforcement of the security interests created by the Security Documents, notwithstanding that the ten (10) day notice period under section 244 of the BIA had not yet expired. Attached to this Affidavit as **Exhibit "BB"** is a true copy of the consent of the Debtors.
41. ATB is applying for the appointment of FTI as receiver because:
 - (a) ATB has made demand for repayment in full of the Indebtedness and the Debtors have no prospect of repaying or refinancing the Indebtedness or for that matter any other obligations of the Debtors;
 - (b) there is no realistic restructuring or reorganization transaction for any of the Debtors that would result in them being financially viable;
 - (c) the Debtors have no access to liquidity and are therefore unable to continue as viable businesses, which creates significant risk to ATB's security position and materially prejudices ATB and other creditors of the Debtors;
 - (d) there have been no expressions of interest in the Sale Process that would result in the Indebtedness being repaid;
 - (e) a receiver would stabilize the situation and would secure the Debtors' assets;
 - (f) there are multiple secured parties with potentially conflicting interests and therefore a receiver is appropriate to avoid the chaos and disorder inherent in a piecemeal liquidation by each of the secured parties; and
 - (g) the sale or liquidation of the Debtors' property by a receiver is more likely to maximize the proceeds of realization, to the benefit of all creditors and stakeholders, and determine their respective interests in those proceeds.
42. FTI has consented to act as receiver of the assets, undertakings and properties of the Debtors. Now shown to me and marked as **Exhibit "CC"** is a copy of FTI's consent to act as receiver.

This is **Exhibit "L"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018



A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor



Saskatchewan Personal Property Registry Search Result

Searching Party: Gowling Lafleur Henderson LLP
Search Date: 10-May-2018 13:24:41
Search Type: Standard

Search #: 202745194
Client Reference: A155881/TSC
Control #:

Search Criteria

Search By: Business Debtor Name
Business Name: Mustang Well Services Inc.

The following list displays all matches & indicates the ones that were selected.

8 Registration(s) Found: Exacts (0) - Similar (8)

| Selected | Match | Registration # | Registration Type | Debtor Name | City | Enforcement Instruction | Enforcement Instruction Registration # |
|----------|---------|----------------|--------------------------------------|----------------------------|---------|-------------------------|--|
| Yes | Similar | 301257701 | Personal Property Security Agreement | Mustang Well Services Ltd | Camrose | No | N/A |
| Yes | Similar | 300954843 | Personal Property Security Agreement | Mustang Well Services Ltd. | AB | No | N/A |
| Yes | Similar | 300959842 | Personal Property Security Agreement | MUSTANG WELL SERVICES LTD. | OXBOW | No | N/A |
| Yes | Similar | 300959842 | Personal Property Security Agreement | MUSTANG WELL SERVICES LTD. | CAMROSE | No | N/A |
| Yes | Similar | 300999895 | Personal Property Security Agreement | Mustang Well Services Ltd. | Calgary | No | N/A |
| Yes | Similar | 301107150 | Personal Property Security Agreement | MUSTANG WELL SERVICES LTD. | CALGARY | No | N/A |
| Yes | Similar | 301208502 | Personal Property Security Agreement | Mustang Well Services Ltd. | Camrose | No | N/A |
| Yes | Similar | 301208504 | Personal Property Security Agreement | Mustang Well Services Ltd. | Camrose | No | N/A |



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 17-Oct-2014 13:02:38

Registration #: 301257701
Expiry Date: 17-Oct-2019

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: NO

Registrant

| | |
|---|-------------------------------------|
| Party ID: 150000519 - 1 | Address: 4126 Norland Avenue |
| Entity Type: Business | Burnaby, British Columbia |
| Name: Canadian Securities Registration Systems | V5G3S8 |
| | Canada |

Secured Party

| | |
|--|-------------------------------------|
| Item #: 1 | Address: 700, 7300-48 AVENUE |
| Party ID: 152200568 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V4W2 |
| Name: ALBERTA TREASURY BRANCHES | Canada |

Debtor Party

| | |
|--|-----------------------------|
| *Item #: 1 | Address: PO Box 1467 |
| Party ID: 152200567 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Mustang Well Services Ltd | Canada |

General Property

ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY
PROCEEDS: ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY
DERIVED DIRECTLY OR INDIRECTLY FROM ANY DEALINGS WITH THE
ORIGINAL COLLATERAL OR PROCEEDS THEREOF



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 22-Nov-2012 14:09:46

Registration #: 300954843
Expiry Date: 22-Nov-2022

Event Type: Amendment
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|---|------------------------------------|
| Party ID: 150589749 - 1 | Address: 3318 Millar Avenue |
| Entity Type: Business | Saskatoon, Saskatchewan |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | S7K7G9 Canada |

Secured Party

| | |
|---|---|
| Item #: 1 | Address: 3300, 525 - 8 Avenue SW |
| Party ID: 151712159 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE Canada Equipment Financing G.P. | Canada |

Debtor Party

| | |
|---|---|
| * Item #: 1 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151712160 - 1 | Calgary |
| Entity Type: Business | AB, Alberta |
| Name: Mustang Well Services Ltd. | T2P3N8 Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Exact Rig Carrier |
| Serial #: 2E9RSZ5Z36R073004 | Model: |
| Override: Yes | Color: |
| Item #: 2 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Cheyenne Mast |
| Serial #: 0406039 | Model: |
| Override: Yes | Color: |
| Item #: 3 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Pump Truck |
| Serial #: 1FVUF7WB1YPG53125 | Model: |
| Override: No | Color: |
| Item #: 4 | Year: 2006 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: 30671T | Model: |
| Override: No | Color: |
| Item #: 5 | Year: 2009 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: MWS200902 | Model: |
| Override: No | Color: |
| Item #: 6 | Year: 1999 |
| Serial Type: Motor Vehicle | Make/Desc.: Sterling Truck |
| Serial #: 2FZXKQYB4XAA33315 | Model: |
| Override: No | Color: |
| Item #: 7 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Exact Carrier |
| Serial #: 2E9RSZ5Z96R073007 | Model: |
| Override: No | Color: |



Saskatchewan Personal Property Registry Search Result

Serial Property

| | |
|------------------------------------|--|
| Item #: 8 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Cheyenne Mast |
| Serial #: 0806041 | Model: |
| Override: Yes | Color: |
| Item #: 9 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Pump Truck |
| Serial #: 5KKPALAV83PL79816 | Model: |
| Override: No | Color: |
| Item #: 11 | Year: 2010 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: MWS201002 | Model: |
| Override: No | Color: |
| Item #: 12 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star truck |
| Serial #: 2WKPDJH4YK962165 | Model: |
| Override: No | Color: |
| Item #: 13 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: Crane Carrier |
| Serial #: 1CYEGW6837T047676 | Model: |
| Override: No | Color: |
| Item #: 14 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star truck |
| Serial #: 2WLPSCDJ3YK962739 | Model: |
| Override: No | Color: |
| Item #: 15 | Year: 1989 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: MWS03 | Model: |
| Override: No | Color: |
| Item #: 17 | Year: 1995 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner truck |
| Serial #: 1FVX3EDB3SP599554 | Model: |
| Override: No | Color: |
| Item #: 18 | Year: 2008 |
| Serial Type: Motor Vehicle | Make/Desc.: Irontech Carrier |
| Serial #: 2R9R4CF128E690061 | Model: |
| Override: Yes | Color: |
| Item #: 19 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star truck |
| Serial #: 5KJRALCK4SPN91874 | Model: |
| Override: Yes | Color: |
| Item #: 20 | Year: 1998 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: MWS004 | Model: |
| Override: No | Color: |
| Item #: 21 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star truck |
| Serial #: 2WLPCD2G5YK960249 | Model: |
| Override: No | Color: |
| Item #: 22 | Year: 2009 |
| Serial Type: Motor Vehicle | Make/Desc.: Crane Carrier |
| Serial #: 1CYEGW6879T049305 | Model: |
| Override: Yes | Color: |
| Item #: 23 | Year: 2009 |
| Serial Type: Motor Vehicle | Make/Desc.: Cheyenne Mast |
| Serial #: 0908015 | Model: |
| Override: Yes | Color: |
| Item #: 24 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Kenworth T800 truck |
| Serial #: 1NK0LBEX9Y5959499 | Model: |
| Override: Yes | Color: |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|------------------------------------|--|
| Item #: 25 | Year: 2009 |
| Serial Type: Trailer | Make/Desc.: Southland Doghouse trailer |
| Serial #: 2S9NL666491022197 | Model: |
| Override: No | Color: |
| Item #: 26 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Columbia truck |
| Serial #: 1FVPA6AV43PL05431 | Model: |
| Override: No | Color: |
| Item #: 27 | Year: 2009 |
| Serial Type: Motor Vehicle | Make/Desc.: Cardwell Carrier |
| Serial #: 78244 | Model: |
| Override: Yes | Color: |
| Item #: 28 | Year: 1996 |
| Serial Type: Motor Vehicle | Make/Desc.: Peterbilt Truck |
| Serial #: 1XPALB9X2TN392850 | Model: |
| Override: Yes | Color: |
| Item #: 29 | Year: 2001 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: 2C9HB460812044028 | Model: |
| Override: No | Color: |
| Item #: 31 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star |
| Serial #: 5KJRALCK45PN91874 | Model: 4964SA |
| Override: No | Color: |
| Item #: 32 | Year: 1996 |
| Serial Type: Motor Vehicle | Make/Desc.: Peterbilt |
| Serial #: 1XPALB9X2TN392850 | Model: |
| Override: No | Color: |
| Item #: 34 | Year: 2001 |
| Serial Type: Trailer | Make/Desc.: Doghouse |
| Serial #: 2C9HB46D812044028 | Model: Trailer |
| Override: No | Color: |
| Item #: 35 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star |
| Serial #: 5KJRALCV86PV36016 | Model: 4900 |
| Override: No | Color: |
| Item #: 36 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: Rykar Rig |
| Serial #: 2RCR545D4C16F8393 | Model: SR500 |
| Override: No | Color: |
| Item #: 37 | Year: 1999 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star |
| Serial #: 2WKPDDCJ8WK950999 | Model: 4964FX |
| Override: No | Color: |

General Property

Rig 1 2006 Exact Low Rider Mobile Rig Carrier s/n 2E9RSZ5Z36R073004. 5-axle self-propelled back-in carrier. Tandem-steer front axels rated at 20000lb each, equipped with polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23000lb each, mounted on polished aluminum wheels equipped with 12R22.5 tires w/ approximately 22mm of tread remaining & ABS braking system. Single-man insulated cab with controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9m square Tubing Stiff Mast s/n 04-06-039. MDL 72-150, 66, 720 daN hook-load capacity with 4-lines, primary & secondary fall arreset systems, 2" standpipe & six sheave crown assembly. c/w 2006 SJ Petro XJ250S double-drum Drawworks with LEBUS grooving. main drum 10"x38". Sandline drum 38"x8" c/w crown-saver, SJ Petro band 36", Model 122 hydromantic brake clutch, mechanical drum brake & Crown-o-Matic



Saskatchewan Personal Property Registry Search Result

General Property

Crown Saver.

c/w Detroit series 60 14.0L turbo-charged diesel drive engine s/n 06R0886197 rated @ 425hp @ 2300 rpm.
c/w Allison HT750-DRDDB Torque Tube Drive Automatic 5 speed transmission with power take-off.
c/w Namco right angle drive box
c/w 1" Drill Line and 0.5" Sand Line
c/w Rig-mounted hydraulic system with 200 Gallon Tan, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship jacks, power tong, two Pullmaster PL5 Deck winches, etc.

2000 Freightliner Pump Truck Conventional s/n 1FVUF7WB1YPG53125 equipped with Rock Well 941 Spring-ride front axle rate at 16000lb mounted on 385/65R22.5 tires with polished aluminum wheels, air-operated brakes and ABS braking system. Tri-drive rear axels rated at 19000lb each, equipped with air-ride suspension mounted on 11R24.5 tires with polished aluminum wheels, air-operated brakes & ABS braking system. c/w Fuel tanks and locking storage compartments. c/w Cummins Model Signature 600 15L Diesel Engine s/n 14004589
c/w Eaton RTLO-20918B 18 speed manual transmission s/n 70333492-02
c/w hydraulic system, reservoir tank, power take-off, and two-stage hydraulic pump.
c/w Tulsa 30BBX4L2F 30000lb winch s/n 32700051
c/w Eweco E300 triplex mud pump, 330hp 35000kPa wp, 5"x5" c/w forged fluuld end, quick change heads, 5 valve manifold pulsation dampener, Bowie charge pump with 2" pressure gauge and relief valve.
c/w steel fabricated 163.5bbl mud tank s/n 16980 with settling-trough, two compartments with valves, degasser
c/w flow line, chiksans and mud hoses.

Traveling & Rig Floor Equipment consists of McKislick Fig 83AWT-20, 75 ton traveling block assembly s/n 06-353-54 with three 20" sheaved grooves. C/w set Foster 93R Hydraulic power tubing tongs, set of weld less elevator links s/n 05254-1, 150 ton capacity, Canglobal Model Clipper weight indicator, 0-90000-daN, calibrated to 62000-daN s/n C1237, Cavins depthometer for 14.28MM sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n 06-197, 179-mm (7-1/16 in) x 35,000kPa (5,000-psi) wp, Nace Trim, Spool, 179-mm (7-1/16 in) x 21,000kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2 7/8-in (73-mm). s/n 114043 & 114044. Lot of saver subs, 2 7/8-in (73-mm) & 3 1/2-in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubingspider s/n 2646w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips s/n 74742-3 w/ 60 to 89-mm dies. Set AOT Type TA-100 s/n 74200, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico 554-578-600, 25-ton rod hook s/n H0406006 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings, lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Retired Doghouse Building & Contents - 1976 (rebuilt 2006) shop-built mobile doghouse trailer s/n 30671T, 8ftx30ft mounted on tandem 10000lbs axels c/w change shack.

Doghouse Building & Contents - 2009 Shop-built mobile doghouse trailer s/n MWS200902; 9-ft x 32-ft mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant s/n X06B070573; Isuzu Model EE-4BG1T 4-cylinder diesel untitized with Stamford 30- kW generator c/w day tank, electric start & switchgear. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater,



Saskatchewan Personal Property Registry Search Result

General Property

storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & incinolet toilet.

Auxiliary Truck - 1999 Sterling tandem-axle truck s/n 2FZXKWYB4XAA33315. FL941 spring-ride front axle rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. GVWR 56,000lbs. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9TL21455 rated @ 300-hp @ 2100 rpm. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8ft x 20ft. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, Two SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs,

Rig 2 2006 Exact Model Low-Rider 5-axle self-propelled back-in carrier s/n 2E9RSZ5Z96R073007. Tandem steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9-m (72-ft) square tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-Omatic crown saver. c/w Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm. c/w Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. c/w Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship, jacks, power tong, (2) Pullmaster PL5 deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

2003 Western Star Model 4964S tandem-axle pump truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axle rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air - operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, fuel tanks, revolving beacons, chocks etc. c/w ISX diesel engine s/n 14004589 rated at 425-hp. c/w Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250 c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in



Saskatchewan
Personal Property Registry
Search Result

General Property

pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 26-m³ (163.5- bbl) mud tank with settling-trough, two compartments, w/
valves,
degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 059-1764
w/ (3)
20-in sheaves grooved for 7-in line. Set Gill Model 500 hydraulic power tubing tongs s/n 500-896. Set x 1-3/4-in x 72-in
weld
less elevator links s/n 06100-1 and 06100-2 (and/or 06099-1, 06099-2), 150-ton capacity. Schwab's Model Clipper weight
indicator s/n 1551, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - Shaffer Model LWP double-gate ram preventer s/n 10641, 179-mm (7-1/16 in) x 21,000-
kPa
(3,000-psi) wp, Nace Trim. Spool s/n 60986-01, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet
valve.
BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 2?-in (73-mm). Lot of saver subs, 2?-in (73-
mm)
& 3 1/2- in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubing splder w/ 3 1/2-in (89-mm) slip
body. Set
Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set
BJ
100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-542-400, 25-ton rod hook s/n H0606136 w/ clevis. Two
Rod
elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x
21,000-
kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints,
60-
mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose.
Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift
mandrels,
rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x
21,000-
kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents (new unit under construction) - 2010 Shop-built mobile doghouse trailer s/n
MWS201002, approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air -
operated
brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office,
utility &
light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge,
desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant: Isuzu
Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30 kW generator c/w day tank, electric start & switchgear s/n
M11C110969. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants,
slings,
chains, w/ electric heater, grinder, vice, work benches & Incinlet toilet.

Auxiliary truck - 2000 Western Star Model 4964S tandem axel truck s/n 2WKPDDJH4YK962165. Meritor
Model
FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires
w/ air -
operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum
wheels
mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire
chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm. Transmission; Eaton
Model RTLO-
16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-
back
access tarp, locking storage compartments, built-in tool boxes, BOP slding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs,
safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire
blanket,
(2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand
wrenches,
screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers,
shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves,
hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.



Saskatchewan
Personal Property Registry
Search Result

General Property

Rig 3 2007 Crane Model W55853C006 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform.
c/w 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square-tubing stiff mast s/n KE-5042, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly c/w Cooper double-drum drawworks s/n 1949 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver.
c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R0949883 rated @ 425-hp @ 2300 rpm.
c/w Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5- speed transmission s/n M5610A w/ power take-off.
c/w Namco Model right angle drive box.
c/w Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (14.28-mm) sandline.
c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
c/w Class II carrier-mounted 22-gal accumulator system

2000 Western Star Model 4986FX tridrive truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axle rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks, revolving beacons, chalks etc.
c/w Cat Model 3406E diesel engine s/n 2WS19060 rated at 550-hp; 14.6-litre. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.
c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb 32700063
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two compartments w/ valves, degasser

"Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline."

B.O.P. Equipment - IEI double-gate ram Preventer s/n 05-059 (and/or 06-197), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool s/n 45468-ACD-4 (and/or 48558-ACD-4), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ Two 51-mm outlet valves. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 27-in (73-mm). Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm).

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider s/n MSM04681 w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA65, 65-ton 60-mm (2- 3/8 in) tubing elevators s/n



Saskatchewan
Personal Property Registry
Search Result

General Property

63068. Set AOT Type TA-100; 100-ton 73 mm (2-7/8 in) tubing elevators s/n 87752, Trico Model 554-578-600, 25-ton rod hook s/n H1017020. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-In to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator; (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1989 Custom-built mobile doghouse trailer s/n MWS03; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section.

Doghouse Building & Contents - 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lbs tandem-axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T s/n 75ZXL03.1GTB 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Auxiliary Truck; 1995 Freightliner Conventional tandem-axel truck s/n 1FVX3EDB3SP599554 equipped w/ Rock Well Model 941 spring-ride front axel mounted on 385/65R22.5 tires w/ approximately 8- mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9CK15423 rated @ 350-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig support equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30 minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 5 2008 Irontech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 10-mm of tread remaining & ABS braking system. Meritor singlereduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 21-mm of tread remaining & ABS braking system. Singleman insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Irontech Model 72-140S freestanding stiff mast /sn MO-45-07 72-ft 21.9-m), 150,000-lbs (66,720-daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly. c/w Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks s/n 9.KK.01.08 (splash-cooled & belt driven) c/w crown-saver & brakes. c/w Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 425- hp @ 2100 rpm. c/w Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. c/w Rig-up right angel gear box GP.54.08 Hydraulic System; rig-mounted hydraulic system with approximately



Saskatchewan
Personal Property Registry
Search Result

General Property

200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
c/w Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043

2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK4SPN91874. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks, revolving beacons, chocks etc.
c/w Detroit Series 60, 14-litre turbo diesel drive engine s/n 05R0801867, rated @ 500-hp @ 1800 rpm.
c/w Transmission; Allison Model 4700 OFS 5- speed automatic transmission w/ power take-off.
c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ 176- bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 1759866 w/ (3) 20-in sheaves grooved for 7-in line. Set Tillery & Parks Type 5890- hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator s/n C1240, 0-90,000-daN, calibrated to 62,000-daN.
Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (API) double-gate ram Preventer s/n 05-059, 179- mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2t) HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide.
Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoletoilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinoletoilet Model WB electric toilet.

Auxiliary truck 2000 Western Star Model 4964SX tandem-axel truck s/n 2WLPCD2G5YK960249 w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires



Saskatchewan
Personal Property Registry
Search Result

General Property

w/ approximately 14-mm of tread remaining, air - operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model C12, 12-L turbo-charged diesel engine s/n 2KS03838 rated @ 425-hp @ 1800. Transmission; Eaton Model RTLO- 16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, high angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 7 1978 (rebuilt 2009) Cardwell K150 Mobile Rig Carrier; - 1978 Cardwell Model B140, 4-axle self-propelled back-in carrier s/n 78244. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast s/n CE-4544, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203- mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 04RE102775 rated @ 665-hp @ 2300 rpm. c/w Transmission s/n 2510014086; Allison Model CLT750 torque tube drive automatic transmission. c/w Bevel right angle drive box. c/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

Unit PT- 07: 1996 Peterbilt Pump Truck - 1996 Peterbilt truck s/n 1XPALB9XZTN392850 equipped w/ spring-ride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. c/w Engine; Cat Model 3406E diesel engine rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w low line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-



Saskatchewan
Personal Property Registry
Search Result

General Property

kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guilberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 2001 mobile doghouse trailer 2C9HB460812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Rig 6 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n1CYEGW6879T049305. Tandem steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man Insulated cab w/ controls, built-in toolboxes, fuel tanks, wing walk and adjustable working platform.C/w Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast s/n 09.08.015, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly.C/w Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40- in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. C/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R1006764 rated @ 665-hp @ 2300 rpm. C/w Transmission; Allison Model HT750 DR torque-tube drive automatic transmission.C/w Namco Model M94-RA45041 right angle drive box s/n N07-16002C/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline.C/w Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc

2000 Kenworth Model T800 truck s/n 1NK0LBEX9Y5959499 equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. c/w Engine; Cat Model 3406E diesel engine s/n 2WS31358 rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 875792 w/ (3) 24-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. Set x 1-3/4-in x 72-in weld less elevator links s/n 150T072/71, 150-ton capacity. Canglobal Model Clipper weight Indicator s/n 28528, 0- 90,000-daN,



Saskatchewan
Personal Property Registry
Search Result

General Property

calibrated
to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n K08-092, 179-mm (7-1/16 in)
x
35,000- kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n
50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs,
73
& 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set
Mission
shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-
7/8 in)
tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod
guide.
Trico Model 554 578-600, 25-ton rod hook w/ clevis s/n s/n H1208060. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton
BOP
elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose.
Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift
mandrels,
rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x
21,000-
kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

"Doghouse Building & Components - 2009 Southland Model CHT22500-9535-84
mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem
10,000-
lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/
doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed
incandescent
interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments,
wrench
boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-
station electric over approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically -
operated BOP hose reels & carrier-mounted remote. Light Plant s/n 49606; Isuzu Model EE-4BG1T 4-cylinder diesel
unitized
with Stamford 55-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet."

Auxiliary Truck - 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model
941
spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/
approximately 18-
mm of tread remaining, air - operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped
w/
airride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ approximately 27-mm of tread
remaining, air - operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chocks etc. Cat Model
C15
turbo-charged diesel engine s/n GNZ87182 rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-
speed
manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp,
locking
storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

"Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air
packs,
safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire
blanket,
(2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand
wrenches,
screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge
hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table
inserts,
valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc."
"The goods described herein, wherever situated, and all present and after-acquired intellectual property,
intangibles, attachments, accessories and accessions thereto and spare parts, replacements, substitutions, exchanges
and
trade-ins therefor, and all rights, receivables and chattel paper derived from or evidencing the lease or rental thereof by
the
Debtor to third parties, and all proceeds relating thereto.



**Saskatchewan
Personal Property Registry
Search Result**

General Property

Proceeds: all of the Debtor's present and after-acquired personal property which is derived directly or indirectly from any dealing with or disposition of the above-described collateral, including, without limiting the generality of the foregoing, all insurance and other payments payable as indemnity or compensation for loss or damage thereto and all chattel paper, documents of title, goods, instruments, intangibles, money and securities

INTERNAL REFERENCE: ESA #8754190001 and #150011594277

One (1) 2006 Western Star 4900 Pump Truck s/n 5KJRALCV86PV36016
c/w Empire E-300 5x6 pump and deckage, serial number 2008-08-03
c/w 5 valve manifold 5000#, line pipe and Alberta spec 26m3 rig tank

Internal reference: ESA cross #8774698001.

2012 RYKAR MODEL SR500 FREESTANDING DOUBLE SERVICE RIG SERIAL NUMBER 2RCR545D4C16F8393 c/w ALL ATTACHMENTS INCLUDING:
NEW SERIES 60 DETROIT DIESEL ENGINE C/W THE FOLLOWING:
RADIATOR C/W AIR TO AIR
WATEROUS PANEL, OIL COOLER, FARR AIR CLEANER
POWER STEERING PUMP C/W ADAPTER GEAR
AIR COMPRESSOR, ALTERNATOR, STARTER
BENDIXFAN HUB AND FAN
AIR TO AIR PIPING AND HOSE KIT
TURBO FLANGE AND CLAMP
RIG SAVER, WILLIAMS CONTROL, COWL MUFFLER
ALLISON OFS 4700 ELECTRONIC TRANSMISSION C/W FILTERS AND NANCO DROP BOX
ENGINE AND TRANSMISSION MOUNTED ON MASTER SKID
NEW 5 AXLE CARRIER, ALL HYDRAULICS AND WIRING
RYKAR DRAWWORKS, 42X10 MAIN DRUM, 38X8 SANDLINE DRUM, 1' LEBUS GROOVING ON MAIN DRUM
KOBELT DISC BRAKE C/W CALIPER
20000# TANDEM FRONT AXLES C/W ABS BRAKES, REYCO SUSPENSION
44000# ROCKWELL REAR AXLES, TRI-DRIVE, C/W NEWAY AIR RIDE
SINGLE MAN CAB C/W AIR RIDE SEAT, HEATER, FAN, ALL GAUGES
WABCO AIR SYSTEM
852 CHELSEA PTO, C/W TANDEM HYDRAULIC PUMP
2 STATION ACCUMULATOR SYSTEM S/W NITROGEN BACK UP SYSTEM
125 GAL. ALUMINUM FUEL TANK
COMPLETE 12 VOLT ELECTRICAL SYSTEM C/W LOCK OUT SWITCHES
2 - 8000# RATED WINCHES
ALL DRIVING LIGHTS, MIRRORS, MUD FLAPS, ETC.
4 NEW 445/65R22.5 RADIAL TIRES C/W 4 ALUMINUM RIMS, 12 NEW 12/R22.5 RADIAL TIRES C/W 12 ALUMINUM RIMS
TOOL BOXES
MAST WIRING C/W INCANDESCENT LIGHTS
MANUAL OUTRIGGERS (QT100 PLATE)
6 FT. RIG FLOOR C/W FOLD OUT WINGS, C/W ALL HANDRAILS
HYDRAULIC TANK, MINIMUM CAPACITY 250 GALS
ALL WALKWAY'S PULLOUT ON ROLLERS
MCKISSICK DIVIDING BLOCK AND HOOK ASSEMBLY - 100 TON
1200' 1" DRILL LINE
SET OF TUBING ELEVATORS; 2 7/8" EUE BVM TA100 TON AND 2 3/8" EUE BVM TA100 TON
SET OF KING ELEVATOR LINKS - 72" X 1 1/2"
ALL STAIRS COMING OFF CARRIER - ALUMINIM C/W HANDRAILS
FOLD UP BASE BEAM
GUYLINES FROM MONKEY BOARD TO OUTRIGGERS
CROWN LINES TO CARRIER
SANDBLAST AND PAINT CUSTOMER COLORS (NOTE: 2 COLORS)
CVIP CERTIFICATION NSM CERTIFICATION
NSM CERTIFICATION
COMPLETE MANUAL WITH ALL PART NUMBERS, ETC.

Internal reference: ESA cross #8775251001.

History - Setup

Registration Type: Personal Property Security Agreement
Registration Date: 22-Nov-2012 14:09:46

Registration #: 300954843
Transaction #: 1
Expiry Date: 22-Nov-2022

Event Type: Setup
Transaction Reason: Regular



**Saskatchewan
Personal Property Registry
Search Result**

Notations

Trust Indenture: No

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 |
| | Canada |

Secured Party

| | |
|---|---|
| Item #: 1 | Address: 3300, 525 - 8 Avenue SW |
| Party ID: 151712159 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE Canada Equipment Financing G.P. | Canada |

Debtor Party

| | |
|---|---|
| Item #: 1 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151712160 - 1 | Calgary |
| Entity Type: Business | AB, Alberta |
| Name: Mustang Well Services Ltd. | T2P3N8 |
| | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Exact Rig Carrier |
| Serial #: 2E9RSZ5Z36R073004 | Model: |
| Override: Yes | Color: |
| Item #: 2 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Cheyenne Mast |
| Serial #: 0406039 | Model: |
| Override: Yes | Color: |
| Item #: 3 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Pump Truck |
| Serial #: 1FVUF7WB1YPG53125 | Model: |
| Override: No | Color: |
| Item #: 4 | Year: 2006 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: 30671T | Model: |
| Override: No | Color: |
| Item #: 5 | Year: 2009 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: MWS200902 | Model: |
| Override: No | Color: |
| Item #: 6 | Year: 1999 |
| Serial Type: Motor Vehicle | Make/Desc.: Sterling Truck |
| Serial #: 2FZXKWB4XAA33315 | Model: |
| Override: No | Color: |
| Item #: 7 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Exact Carrier |
| Serial #: 2E9RSZ5Z96R073007 | Model: |
| Override: No | Color: |
| Item #: 8 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Cheyenne Mast |
| Serial #: 0806041 | Model: |
| Override: Yes | Color: |
| Item #: 9 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Pump Truck |
| Serial #: 5KKPALAV83PL79816 | Model: |
| Override: No | Color: |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|--|---|
| Item #: 10 Serial Type: Trailer Serial #: 30663 Override: No | Year: 1990 Make/Desc.: Doghouse Trailer Model: Color: |
| Item #: 11 Serial Type: Trailer Serial #: MWS201002 Override: No | Year: 2010 Make/Desc.: Doghouse Trailer Model: Color: |
| Item #: 12 Serial Type: Motor Vehicle Serial #: 2WKPDJH4YK962165 Override: No | Year: 2000 Make/Desc.: Western Star truck Model: Color: |
| Item #: 13 Serial Type: Motor Vehicle Serial #: 1CYEGW6837T047676 Override: No | Year: 2007 Make/Desc.: Crane Carrier Model: Color: |
| Item #: 14 Serial Type: Motor Vehicle Serial #: 2WLPSDCJ3YK962739 Override: No | Year: 2000 Make/Desc.: Western Star truck Model: Color: |
| Item #: 15 Serial Type: Trailer Serial #: MWS03 Override: No | Year: 1989 Make/Desc.: Doghouse Trailer Model: Color: |
| Item #: 16 Serial Type: Trailer Serial #: 2M91DV3B7CC185001 Override: No | Year: 2012 Make/Desc.: Doghouse Trailer Model: Color: |
| Item #: 17 Serial Type: Motor Vehicle Serial #: 1FVX3EDB3SP599554 Override: No | Year: 1995 Make/Desc.: Freightliner truck Model: Color: |
| Item #: 18 Serial Type: Motor Vehicle Serial #: 2R9R4CF128E690061 Override: Yes | Year: 2008 Make/Desc.: Irontech Carrier Model: Color: |
| Item #: 19 Serial Type: Motor Vehicle Serial #: 5KJRALCK4SPN91874 Override: Yes | Year: 2005 Make/Desc.: Western Star truck Model: Color: |
| Item #: 20 Serial Type: Trailer Serial #: MWS004 Override: No | Year: 1998 Make/Desc.: Doghouse Trailer Model: Color: |
| Item #: 21 Serial Type: Motor Vehicle Serial #: 2WLPD2G5YK960249 Override: No | Year: 2000 Make/Desc.: Western Star truck Model: Color: |
| Item #: 22 Serial Type: Motor Vehicle Serial #: 1CYEGW6879T049305 Override: Yes | Year: 2009 Make/Desc.: Crane Carrier Model: Color: |
| Item #: 23 Serial Type: Motor Vehicle Serial #: 0908015 Override: Yes | Year: 2009 Make/Desc.: Cheyenne Mast Model: Color: |
| Item #: 24 Serial Type: Motor Vehicle Serial #: 1NK0LBEX9Y5959499 Override: Yes | Year: 2000 Make/Desc.: Kenworth T800 truck Model: Color: |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|------------------------------------|--|
| Item #: 25 | Year: 2009 |
| Serial Type: Trailer | Make/Desc.: Southland Doghouse trailer |
| Serial #: 2S9NL666491022197 | Model: |
| Override: No | Color: |
| Item #: 26 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Columbia truck |
| Serial #: 1FVPA6AV43PL05431 | Model: |
| Override: No | Color: |
| Item #: 27 | Year: 2009 |
| Serial Type: Motor Vehicle | Make/Desc.: Cardwell Carrier |
| Serial #: 78244 | Model: |
| Override: Yes | Color: |
| Item #: 28 | Year: 1996 |
| Serial Type: Motor Vehicle | Make/Desc.: Peterbilt Truck |
| Serial #: 1XPALB9XZTN392850 | Model: |
| Override: Yes | Color: |
| Item #: 29 | Year: 2001 |
| Serial Type: Trailer | Make/Desc.: Doghouse Trailer |
| Serial #: 2C9HB460812044028 | Model: |
| Override: No | Color: |
| Item #: 30 | Year: 1986 |
| Serial Type: Motor Vehicle | Make/Desc.: Kenworth Truck |
| Serial #: 2XKWDBUX2GM915179 | Model: |
| Override: Yes | Color: |

General Property

Rig 1 2006 Exact Low Rider Mobile Rig Carrier s/n 2E9RSZ5Z36R073004. 5-axle self-propelled back-in carrier. Tandem-steer front axels rated at 20000lb each, equipped with polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23000lb each, mounted on polished aluminum wheels equipped with 12R22.5 tires w/ approximately 22mm of tread remaining & ABS braking system. Single-man insulated cab with controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9m square Tubing Stiff Mast s/n 04-06-039. MDL 72-150, 66, 720 daN hook-load capacity with 4-lines, primary & secondary fall arreset systems, 2" standpipe & six sheave crown assembly. c/w 2006 SJ Petro XJ250S double-drum Drawworks with LEBUS grooving. main drum 10"x38". Sandline drum 38"x8" c/w crown-saver, SJ Petro band 36", Model 122 hydromantic brake clutch, mechanical drum brake & Crown-o-Matic Crown Saver. c/w Detroit series 60 14.0L turbo-charged diesel drive engine s/n 06R0886197 rated @ 425hp @ 2300 rpm. c/w Allison HT750-DRDDB Torque Tube Drive Automatic 5 speed transmission with power take-off. c/w Namco right angle drive box c/w 1" Drill Line and 0.5" Sand Line c/w Rig-mounted hydraulic system with 200 Gallon Tan, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship jacks, power tong, two Pullmaster PL5 Deck winches, etc.

2000 Freightliner Pump Truck Conventional s/n 1FVUF7WB1YPG53125 equipped with Rock Well 941 Spring-ride front axle rate at 16000lb mounted on 385/65R22.5 tires with polished aluminum wheels, air-operated brakes and ABS braking system. Tri-drive rear axels rated at 19000lb each, equipped with air-ride suspension mounted on 11R24.5 tires with polished aluminum wheels, air-operated brakes & ABS braking system. c/w Fuel tanks and locking storage compartments. c/w Cummins Model Signature 600 15L Diesel Engine s/n 14004589 c/w Eaton RTLO-20918B 18 speed manual transmission s/n 70333492-02 c/w hydraulic system, reservoir tank, power take-off, and two-stage hydraulic pump. c/w Tulsa 30BBX4L2F 30000lb winch s/n 32700051 c/w Eweco E300 triplex mud pump, 330hp 35000kPa wp, 5"x5" c/w forged fluuid end, quick change heads, 5 valve manifold pulsation dampener, Bowie charge pump with 2" pressure gauge and relief valve. c/w steel fabricated 163.5bbl mud tank s/n 16980 with settling-trough, two compartments with valves, degasser c/w flow line, chiksans and mud hoses.

Traveling & Rig Floor Equipment consists of McKissick Fig 83AWT-20, 75 ton traveling block assembly s/n 06-353-54 with three 20" sheaved grooves. C/w set Foster 93R Hydraulic power tubing tongs, set of weld less elevator links s/n 05254-1, 150 ton capacity, Canglobal Model Clipper weight indicator, 0-90000-daN, calibrated to 62000-daN s/n C1237, Cavins depthometer for 14.28MM sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n 06-197, 179-mm (7-1/16 in) x 35,000kPa (5,000-psi) wp, Nace Trim, Spool, 179-mm (7-1/16 in) x 21,000kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP



Saskatchewan Personal Property Registry Search Result

General Property

hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2 7/8-in (73-mm). s/n 114043 & 114044. Lot of saver subs, 2 7/8-in (73-mm) & 3 1/2-in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubingspider s/n 2646w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips s/n 74742-3 w/ 60 to 89-mm dies. Set AOT Type TA-100 s/n 74200, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico 554-578-600, 25-ton rod hook s/n H0406006 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings, lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Retired Doghouse Building & Contents - 1976 (rebuilt 2006) shop-built mobile doghouse trailer s/n 30671T, 8ftx30ft mounted on tandem 10000lbs axels c/w change shack.

Doghouse Building & Contents - 2009 Shop-built mobile doghouse trailer s/n MWS200902; 9-ft x 32-ft mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant s/n X06B070573; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet.

Auxiliary Truck - 1999 Sterling tandem-axel truck s/n 2FZXKWB4XAA33315. FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's airride seat, tire chains, chalks etc. GVWR 56,000lbs. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9TL21455 rated @ 300-hp @ 2100 rpm. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8ftx20ft. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, Two SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs,

Rig 2006 Exact Model Low-Rider 5-axle self-propelled back-in carrier s/n 2E9RSZ5Z96R073007. Tandem steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform.

c/w 2006 Cheyenne 21.9-m (72-ft) square tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-Omatic crown saver.

c/w Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm.

c/w Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off.

c/w Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drilline & 1/2-in (12.7-mm) sandline.

c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship, jacks, power tong, (2) Pullmaster PL5 deck winches, etc.

c/w Class II carrier-mounted 22-gal accumulator system.

2003 Western Star Model 4964S tandem-axel pump truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air - operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc.

c/w ISX diesel engine s/n 14004589 rated at 425-hp.

c/w Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250

c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.

c/w Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.



Saskatchewan Personal Property Registry Search Result

General Property

c/w Mud Tank; Steel-fabricated 26-m³ (163.5- bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Travelling & Rig Floor Equipment - McKlissick Fig 83AWT-20, 75-ton traveling block assembly s/n 059-1764 w/ (3) 20-in sheaves grooved for 7-in line. Set Gill Model 500 hydraulic power tubing tongs s/n 500-896. Set x 1-3/4-in x 72-in weld less elevator links s/n 06100-1 and 06100-2 (and/or 06099-1, 06099-2), 150-ton capacity. Schwab's Model Clipper weight indicator s/n 1551, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - Shaffer Model LWP double-gate ram preventer s/n 10641, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp, Nace Trim. Spool s/n 60986-01, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 27-in (73-mm). Lot of saver subs, 27-in (73-mm) & 3 1/2- in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-542-400, 25-ton rod hook s/n H0606136 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guilberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1990 Tri mobile doghouse trailer s/n 30663; approximately 8-ft wide x 36-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinoleet Model WB electric toilet

Doghouse Building & Contents (new unit under construction) - 2010 Shop-built mobile doghouse trailer s/n MWS201002, approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30 kW generator c/w day tank, electric start & switchgear s/n M11C110969. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet.

Auxiliary truck - 2000 Western Star Model 4964S tandem axle truck s/n 2WKPDJH4YK962165. Meritor Model FL941 spring-ride front axle rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 3 2007 Crane Model W55853C006 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform.

c/w 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square-tubing stiff mast s/n KE-5042, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly c/w Cooper double-drum drawworks s/n 1949 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver.

c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R0949883 rated @ 425-hp @ 2300 rpm.

c/w Transmission; Allison Model HT750- DRDD torque-tube-drive automatic 5- speed transmission s/n M5610A w/ power take-off.

c/w Namco Model right angle drive box.

c/w Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (14.28-mm) sandline.



Saskatchewan Personal Property Registry Search Result

General Property

c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
c/w Class II carrier-mounted 22-gal accumulator system

2000 Western Star Model 4986FX tridrive truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axle rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axles rated at 18,333-lbs/eh equipped w/ air-ride axles rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks, revolving beacons, chocks etc.

c/w Cat Model 3406E diesel engine s/n 2WS19060 rated at 550-hp; 14.6-litre. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.

c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.

c/w Tulsa Model 30BBX4L2F winch; 30,000-lb 32700063

c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.

c/w Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two compartments w/ valves, degasser

"Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly

s/n 06-349-24w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline."

B.O.P. Equipment - IEI double-gate ram Preventer s/n 05-059 (and/or 06-197), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool s/n 45468-ACD-4 (and/or 48558-ACD-4), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ Two 51-mm outlet valves. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2?-in (73-mm). Lot of saver subs, 2?-in (73-mm) & 3½-in (89-mm).

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider s/n MSM04681 w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA65, 65-ton 60-mm (2- 3/8 in) tubing elevators s/n 63068. Set AOT Type TA-100; 100-ton 73 mm (2-7/8 in) tubing elevators s/n 87752, Trico Model 554-578-600, 25-ton rod hook s/n H1017020. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose.

Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1989 Custom-built mobile doghouse trailer s/n MWS03; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section.

Doghouse Building & Contents - 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lbs tandem-axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T s/n 752XL03.1GTB 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Auxiliary Truck; 1995 Freightliner Conventional tandem-axle truck s/n 1FVX3EDB3SP599554 equipped w/ Rock Well Model 941 spring-ride front axle mounted on 385/65R22.5 tires w/ approximately 8- mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9CK15423 rated @ 350-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig support equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30 minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 5 2008 Irontech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axle equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 10-mm of tread remaining & ABS braking system. Meritor singlereduction tri-drive rear axels rated at 10,432-kg / axle mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 21-mm of tread remaining & ABS braking system. Singleman



Saskatchewan Personal Property Registry Search Result

General Property

Insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform.
c/w Irontech Model 72-140S freestanding stiff mast /sn MO-45-07 72-ft 21.9-m), 150,000-lbs (66,720-daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly.
c/w Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks s/n 9.KK.01.08 (splash-cooled & belt driven) c/w crown-saver & brakes.
c/w Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 425- hp @ 2100 rpm.
c/w Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off.
c/w Rig-up right angel gear box GP.54.08 Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
c/w Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043

2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK4SPN91874. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc.
c/w Detroit Series 60, 14-litre turbo dlesel drive engine s/n 05R0801867, rated @ 500-hp @ 1800 rpm.
c/w Transmission; Allison Model 4700 OFS 5- speed automatic transmission w/ power take-off.
c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ 176- bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 1759866 w/ (3) 20-in sheaves grooved for ?-in line. Set Tillery & Parks Type 5890- hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator s/n C1240, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (API) double-gate ram Preventer s/n 05-059, 179- mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2t) Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubular rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinoleet Model WB electric toilet.

Auxiliary truck 2000 Western Star Model 4964SX tandem-axel truck s/n 2WLPD2G5YK960249 w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ approximately 14-mm of tread remaining, air - operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model C12, 12-L turbo-charged diesel engine s/n 2KS03838rated @ 425-hp @ 1800. Transmission; Eaton Model RTLO- 16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, high angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.



Saskatchewan Personal Property Registry Search Result

General Property

Rig 7 1978 (rebuilt 2009) Cardwell K150 Mobile Rig Carrier; - 1978 Cardwell Model B140, 4-axle self-propelled back-in carrier s/n 78244. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform.

c/w Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast s/n CE-4544, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly.

c/w Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in).

Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver.

c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 04RE102775 rated @ 665-hp @ 2300 rpm.

c/w Transmission s/n 2510014086; Allison Model CLT750 torque tube drive automatic transmission.

c/w Bevel right angle drive box.

c/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc.

c/w Class II carrier-mounted 22-gal accumulator system.

Unit PT- 07: 1996 Peterbilt Pump Truck - 1996 Peterbilt truck s/n 1XPALB9XZTN392850 equipped w/ spring-ride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc.

c/w Engine; Cat Model 3406E diesel engine rated at 475-hp.

c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.

c/w Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump.

c/w Tulsa Model 30BBX4L2F winch; 30,000-lb

c/w Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & relief valve.

c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves,

degasser, c/w low line, chiksans & mud hoses.

Travelling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose.

Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 2001 mobile doghouse trailer 2C9HB460812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinole Model WB electric toilet.

Auxiliary Truck - 1986 Kenworth tandem-axel truck s/n 2XKWDBUX2GM915179. Spring-ride front axel mounted on steel wheels equipped w/ air - operated brakes. Air-ride rear axels mounted on steel wheels. Steel-constructed carrier deck. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 6 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n1CYEGW6879T049305.
Tandem steer front axels equipped w/ polished aluminum wheels



Saskatchewan Personal Property Registry Search Result

General Property

mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in toolboxes, fuel tanks, wing walk and adjustable working platform. C/w Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast s/n 09.08.015, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly. C/w Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40- in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. C/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R1006764 rated @ 665-hp @ 2300 rpm. C/w Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. C/w Namco Model M94-RA45041 right angle drive box s/n N07-16002C/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. C/w Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc

2000 Kenworth Model T800 truck s/n 1NK0LBEX9Y5959499 equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. c/w Engine; Cat Model 3406E diesel engine s/n 2WS31358 rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 875792 w/ (3) 24-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. Set x 1-3/4-in x 72-in weld less elevator links s/n 150T072/71, 150-ton capacity. Canglobal Model Clipper weight indicator s/n 28528, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n K08-092, 179-mm (7-1/16 in) x 35,000- kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis s/n s/n H1208060. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

"Doghouse Building & Components - 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet. Class III accumulator; 3-station electric over approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant s/n 49606; Isuzu Model EE-4BG1T 4-cyl/Inder diesel unitized with Stamford 55-kW generator c/w day tank, electric start & switchgear. Incinoleet Model WB electric toilet."

Auxiliary Truck - 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ airride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ approximately 27-mm of tread remaining, air - operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine s/n GNZ87182 rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.



**Saskatchewan
Personal Property Registry
Search Result**

General Property

"Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc."

"The goods described herein, wherever situated, and all present and after-acquired intellectual property, intangibles, attachments, accessories and accessions thereto and spare parts, replacements, substitutions, exchanges and trade-ins therefor, and all rights, receivables and chattel paper derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto.

Proceeds: all of the Debtor's present and after-acquired personal property which is derived directly or indirectly from any dealing with or disposition of the above-described collateral, including, without limiting the generality of the foregoing, all insurance and other payments payable as indemnity or compensation for loss or damage thereto and all chattel paper, documents of title, goods, instruments, intangibles, money and securities

INTERNAL REFERENCE: ESA #8754190001 and #150011594277

History - Amendment

**Registration #: 300954843
Transaction #: 2**

Amendment Date: 03-Dec-2012 12:28:54

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 Canada |

Serial Property

| | |
|------------------------------------|-------------------------------------|
| Action: Delete | Year: 2012 |
| Item #: 16 | Make/Desc.: Doghouse Trailer |
| Serial Type: Trailer | Model: |
| Serial #: 2M91DV3B7CC185001 | Color: |
| Override: No | |
| | |
| Action: Add | Year: 2005 |
| Item #: 31 | Make/Desc.: Western Star |
| Serial Type: Motor Vehicle | Model: 4964SA |
| Serial #: 5KJRALCK45PN91874 | Color: |
| Override: No | |
| | |
| Action: Add | Year: 1996 |
| Item #: 32 | Make/Desc.: Peterbilt |
| Serial Type: Motor Vehicle | Model: |
| Serial #: 1XPALB9X2TN392850 | Color: |
| Override: No | |
| | |
| Action: Add | Year: 1986 |
| Item #: 33 | Make/Desc.: Kenworth |
| Serial Type: Motor Vehicle | Model: |
| Serial #: 2XKWDB0X2GM915179 | Color: |
| Override: No | |
| | |
| Action: Add | Year: 2001 |
| Item #: 34 | Make/Desc.: Doghouse |
| Serial Type: Trailer | Model: Trailer |
| Serial #: 2C9HB46D812044028 | Color: |
| Override: No | |

History - Amendment

Amendment Date: 27-Feb-2013 09:47:07

**Registration #: 300954843
Transaction #: 3**



Saskatchewan Personal Property Registry Search Result

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|---|------------------------------------|
| Party ID: 150589749 - 1 | Address: 3318 Millar Avenue |
| Entity Type: Business | Saskatoon, Saskatchewan |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | S7K7G9 Canada |

Serial Property

| | |
|-----------------------------|-------------------------------------|
| Action: Delete | Year: 1990 |
| Item #: 10 | Make/Desc.: Doghouse Trailer |
| Serial Type: Trailer | Model: |
| Serial #: 30663 | Color: |
| Override: No | |

General Property

Rig 1 2006 Exact Low Rider Mobile Rig Carrier s/n 2E9RSZ5Z36R073004. 5-axle self-propelled back-in carrier. Tandem-steer front axels rated at 20000lb each, equipped with polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23000lb each, mounted on polished aluminum wheels equipped with 12R22.5 tires w/ approximately 22mm of tread remaining & ABS braking system. Single-man insulated cab with controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9m square Tubing Stiff Mast s/n 04-06-039. MDL 72-150, 66, 720 daN hook-load capacity with 4-lines, primary & secondary fall arreset systems, 2" standpipe & six sheave crown assembly. c/w 2006 SJ Petro XJ250S double-drum Drawworks with LEBUS grooving. main drum 10"x38". Sandline drum 38"x8" c/w crown-saver, SJ Petro band 36", Model 122 hydromantic brake clutch, mechanical drum brake & Crown-o-Matic Crown Saver. c/w Detroit series 60 14.0L turbo-charged diesel drive engine s/n 06R0886197 rated @ 425hp @ 2300 rpm. c/w Allison HT750-DRDDB Torque Tube Drive Automatic 5 speed transmission with power take-off. c/w Namco right angle drive box c/w 1" Drill Line and 0.5" Sand Line c/w Rig-mounted hydraulic system with 200 Gallon Tan, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship jacks, power tong, two Pullmaster PL5 Deck winches, etc.

2000 Freightliner Pump Truck Conventional s/n 1FVUF7WB1YPG53125 equipped with Rock Well 941 Spring-ride front axel rate at 16000lb mounted on 385/65R22.5 tires with polished aluminum wheels, air-operated brakes and ABS braking system. Tri-drive rear axels rated at 19000lb each, equipped with air-ride suspension mounted on 11R24.5 tires with polished aluminum wheels, air-operated brakes & ABS braking system. c/w Fuel tanks and locking storage compartments. c/w Cummins Model Signature 600 15L Diesel Engine s/n 14004589 c/w Eaton RTLO-20918B 18 speed manual transmission s/n 70333492-02 c/w hydraulic system, reservoir tank, power take-off, and two-stage hydraulic pump. c/w Tulsa 30BBX4L2F 30000lb winch s/n 32700051 c/w Eweco E300 triplex mud pump, 330hp 35000kPa wp, 5"x5" c/w forged fluuid end, quick change heads, 5 valve manifold pulsation dampener, Bowie charge pump with 2"pressure gauge and relief valve. c/w steel fabricated 163.5bbl mud tank s/n 16980 with settling-trough, two compartments with valves, degasser c/w flow line, chiksans and mud hoses.

Traveling & Rig Floor Equipment consists of McKissick Fig 83AWT-20, 75 ton traveling block assembly s/n 06-353-54 with three 20" sheaved grooves. C/w set Foster 93R Hydraulic power tubing tongs, set of weld less elevator links s/n 05254-1, 150 ton capacity, Canglobal Model Clipper weight indicator, 0-90000-daN, calibrated to 62000-daN s/n C1237, Cavins depthometer for 14.28MM sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n 06-197, 179-mm (7-1/16 in) x 35,000kPa (5,000-psi) wp, Nace Trim, Spool, 179-mm (7-1/16 in) x 21,000kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP



Saskatchewan
Personal Property Registry
Search Result

General Property

hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2 7/8-in (73-mm). s/n 114043 & 114044. Lot of saver subs, 2 7/8-in (73-mm) & 3 1/2-in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubingspider s/n 2646w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips s/n 74742-3 w/ 60 to 89-mm dies. Set AOT Type TA-100 s/n 74200, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico 554-578-600, 25-ton rod hook s/n H0406006 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings, lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Retired Doghouse Building & Contents - 1976 (rebuilt 2006) shop-built mobile doghouse trailer s/n 30671T, 8ftx30ft mounted on tandem 10000lbs axels c/w change shack.

Doghouse Building & Contents - 2009 Shop-built mobile doghouse trailer s/n MWS200902; 9-ft x 32-ft mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant s/n X06B070573; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

Auxiliary Truck - 1999 Sterling tandem-axel truck s/n 2FZXKWB4XAA33315. FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's airride seat, tire chains, chocks etc. GVWR 56,000lbs. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9TL21455 rated @ 300-hp @ 2100 rpm. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8ftx20ft. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, Two SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs,

Rig 2 2006 Exact Model Low-Rider 5-axle self-propelled back-in carrier s/n 2E9RSZ5Z96R073007. Tandem steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum



Saskatchewan
Personal Property Registry
Search Result

General Property

wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9-m (72-ft) square tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in-dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-Omatic crown saver. c/w Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm. c/w Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. c/w Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship, jacks, power tong, (2) Pullmaster PL5 deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

2003 Western Star Model 4964S tandem-axel pump truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, fuel tanks, revolving beacons, chucks etc. c/w ISX diesel engine s/n 14004589 rated at 425-hp. c/w Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250 c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 059-1764 w/ (3) 20-in sheaves grooved for 7-in line. Set Gill Model 500 hydraulic power tubing tongs s/n 500-896. Set x 1-3/4-in x 72-in weld less elevator links s/n 06100-1 and 06100-2 (and/or 06099-1, 06099-2), 150-ton capacity. Schwab's Model Clipper weight indicator s/n 1551, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - Shaffer Model LWP double-gate ram preventer s/n 10641, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp, Nace Trim. Spool s/n 60986-01, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2?-in (73-mm). Lot of saver subs, 2?-in (73-mm) & 3 1/2-in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-542-400, 25-ton rod hook s/n H0606136 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x



Saskatchewan Personal Property Registry Search Result

General Property

21,000-
kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents (new unit under construction) - 2010 Shop-built mobile doghouse trailer s/n MWS201002, approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant: Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30 kW generator c/w day tank, electric start & switchgear s/n M11C110969. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

Auxiliary truck - 2000 Western Star Model 4964S tandem axel truck s/n 2WKPDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 3 2007 Crane Model W55853C006 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square-tubing stiff mast s/n KE-5042, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly c/w Cooper double-drum drawworks s/n 1949 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-In, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R0949883 rated @ 425-hp @ 2300 rpm. c/w Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5- speed transmission s/n M5610A w/ power take-off. c/w Namco Model right angle drive box. c/w Drill & Sandline; 7/8-Inch (25.4-mm) drillline & 1/2-in (14.28-mm) sandline. c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system

2000 Western Star Model 4986FX tridrive truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-



Saskatchewan
Personal Property Registry
Search Result

General Property

ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc.
c/w Cat Model 3406E diesel engine s/n 2WS19060 rated at 550-hp; 14.6-litre. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.
c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb 32700063
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ (163.5- bbl) mud tank with settling-trough, two compartments w/ valves, degasser

"Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline."

B.O.P. Equipment - IEI double-gate ram Preventer s/n 05-059 (and/or 06-197), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool s/n 45468-ACD-4 (and/or 48558-ACD-4), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ Two 51-mm outlet valves. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2?-in (73-mm). Lot of saver subs, 2?-in (73-mm) & 3½-in (89-mm).

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider s/n MSM04681 w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA65, 65-ton 60-mm (2- 3/8 in) tubing elevators s/n 63068. Set AOT Type TA-100; 100-ton 73 mm (2-7/8 in) tubing elevators s/n 87752, Trico Model 554-578-600, 25-ton rod hook s/n H1017020. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1989 Custom-built mobile doghouse trailer s/n MWS03; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section.

Doghouse Building & Contents - 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lbs tandem-axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T s/n 75ZXL03.1GTB 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.
Auxiliary Truck; 1995 Freightliner Conventional tandem-axel truck s/n 1FVX3EDB3SP599554 equipped w/ Rock Well Model 941 spring-ride front axel mounted on 385/65R22.5 tires w/ approximately 8- mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension



Saskatchewan
Personal Property Registry
Search Result

General Property

mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9CK15423 rated @ 350-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig support equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30 minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket,
(2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 5 2008 Irontech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 10-mm of tread remaining & ABS braking system. Meritor singlereduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 21-mm of tread remaining & ABS braking system. Singleman insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform.
c/w Irontech Model 72-140S freestanding stiff mast /s/n MO-45-07 72-ft 21.9-m), 150,000-lbs (66,720-daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly.
c/w Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks s/n 9.KK.01.08 (splash-cooled & belt driven) c/w crown-saver & brakes.
c/w Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 425- hp @ 2100 rpm.
c/w Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off.
c/w Rig-up right angel gear box GP.54.08 Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
c/w Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043

2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK4SPN91874. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc.
c/w Detroit Series 60, 14-litre turbo diesel drive engine s/n 05R0801867, rated @ 500-hp @ 1800 rpm.
c/w Transmission; Allison Model 4700 OFS 5- speed automatic transmission w/ power take-off.
c/w Hydraulic system; resevoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ 176- bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 1759866 w/ (3) 20-in sheaves grooved for 7-in line. Set Tillery & Parks Type 5890- hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator s/n C1240, 0-90,000-daN, calibrated to 62,000-daN.
Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (API) double-gate ram Preventer s/n 05-059, 179- mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves,



Saskatchewan Personal Property Registry Search Result

General Property

hoses,
studs, nuts, (2t) Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing splder w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Auxiliary truck 2000 Western Star Model 4964SX tandem-axel truck s/n 2WLPCD2G5YK960249 w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ approximately 14-mm of tread remaining, air - operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model C12, 12-L turbo-charged diesel engine s/n 2KS03838rated @ 425-hp @ 1800. Transmission; Eaton Model RTLO- 16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, high angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 7 1978 (rebuilt 2009) Cardwell K150 Mobile Rig Carrier; - 1978 Cardwell Model B140, 4-axle self-propelled back-in carrier s/n 78244. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast s/n CE-4544, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203- mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 04RE102775 rated @ 665-hp @



Saskatchewan
Personal Property Registry
Search Result

General Property

2300
rpm.
c/w Transmission s/n 2510014086; Allison Model CLT750 torque tube drive automatic transmission.
c/w Bevel right angle drive box.
c/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc.
c/w Class II carrier-mounted 22-gal accumulator system.

Unit PT- 07: 1996 Peterbilt Pump Truck - 1996 Peterbilt truck s/n 1XPALB9XZTN392850 equipped w/ spring-ride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc.
c/w Engine; Cat Model 3406E diesel engine rated at 475-hp.
c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.
c/w Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w low line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 2001 mobile doghouse trailer 2C9HB460812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Auxiliary Truck - 1986 Kenworth tandem-axel truck s/n 2XKWDBUX2GM915179. Spring-ride front axel mounted on steel wheels equipped w/ air - operated brakes. Air-ride rear axels mounted on steel wheels. Steel-constructed carrier deck. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F



Saskatchewan
Personal Property Registry
Search Result

General Property

winch; 30,000-lb. Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket,
(2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 6 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n1CYEGW6879T049305.
Tandem steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in toolboxes, fuel tanks, wing walk and adjustable working platform.C/w Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast s/n 09.08.015, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly.C/w Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40- in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. C/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R1006764 rated @ 665-hp @ 2300 rpm. C/w Transmission; Allison Model HT750 DR torque-tube drive automatic transmission.C/w Namco Model M94-RA45041 right angle drive box s/n N07-16002C/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline.C/w Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc

2000 Kenworth Model T800 truck s/n 1NK0LBEX9Y5959499 equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc.
c/w Engine; Cat Model 3406E diesel engine s/n 2WS31358 rated at 475-hp.
c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.
c/w Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 875792 w/ (3) 24-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. Set x 1-3/4-in x 72-in weld less elevator links s/n 150T072/71, 150-ton capacity. Canglobal Model Clipper weight indicator s/n 28528, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n K08-092, 179-mm (7-1/16 in) x 35,000- kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-In (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in)



Saskatchewan
Personal Property Registry
Search Result

General Property

tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide.
Trico Model 554 578-600, 25-ton rod hook w/ clevis s/n s/n H1208060. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose.
Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

"Doghouse Building & Components - 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant s/n 49606; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 55-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet."

Auxiliary Truck - 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ airride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ approximately 27-mm of tread remaining, air - operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine s/n GNZ87182 rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

"Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc."
"The goods described herein, wherever situated, and all present and after-acquired intellectual property, intangibles, attachments, accessories and accessions thereto and spare parts, replacements, substitutions, exchanges and trade-ins therefor, and all rights, receivables and chattel paper derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto.
Proceeds: all of the Debtor's present and after-acquired personal property which is derived directly or indirectly from any dealing with or disposition of the above-described collateral, including, without limiting the generality of the foregoing, all insurance and other payments payable as indemnity or compensation for loss or damage thereto and all chattel paper, documents of title, goods, instruments, intangibles, money and securities

INTERNAL REFERENCE: ESA #8754190001 and #150011594277

History - Amendment

Amendment Date: 04-Apr-2013 09:39:12

Registration #: 300954843
Transaction #: 4



**Saskatchewan
Personal Property Registry
Search Result**

Event Type: Amendment
Transaction Reason: Regular

Transaction Description: addition of collateral

Registrant

| | |
|---|------------------------------------|
| Party ID: 150589749 - 1 | Address: 3318 Millar Avenue |
| Entity Type: Business | Saskatoon, Saskatchewan |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | S7K7G9 Canada |

Serial Property

| | |
|------------------------------------|---------------------------------|
| Action: Add | Year: 2006 |
| Item #: 35 | Make/Desc.: Western Star |
| Serial Type: Motor Vehicle | Model: 4900 |
| Serial #: 5KJRALCV86PV36016 | Color: |
| Override: No | |

History - Amendment

Registration #: 300954843
Transaction #: 5

Amendment Date: 04-Apr-2013 11:18:19

Event Type: Amendment
Transaction Reason: Regular

Transaction Description: addition of collateral

Registrant

| | |
|---|------------------------------------|
| Party ID: 150589749 - 1 | Address: 3318 Millar Avenue |
| Entity Type: Business | Saskatoon, Saskatchewan |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | S7K7G9 Canada |

General Property

Rig 1 2006 Exact Low Rider Mobile Rig Carrier s/n 2E9RSZ5Z36R073004. 5-axle self-propelled back-in carrier. Tandem-steer front axels rated at 20000lb each, equipped with polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23000lb each, mounted on polished aluminum wheels equipped with 12R22.5 tires w/ approximately 22mm of tread remaining & ABS braking system. Single-man insulated cab with controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9m square Tubing Stiff Mast s/n 04-06-039. MDL 72-150, 66, 720 daN hook-load capacity with 4-lines, primary & secondary fall arreset systems, 2" standpipe & six sheave crown assembly. c/w 2006 SJ Petro XJ250S double-drum Drawworks with LEBUS grooving. main drum 10"x38". Sandline drum 38"x8" c/w crown-saver, SJ Petro band 36", Model 122 hydromantic brake clutch, mechanical drum brake & Crown-o-Matic Crown Saver. c/w Detroit series 60 14.0L turbo-charged diesel drive engine s/n 06R0886197 rated @ 425hp @ 2300 rpm. c/w Allison HT750-DRDDB Torque Tube Drive Automatic 5 speed transmission with power take-off. c/w Namco right angle drive box c/w 1" Drill Line and 0.5" Sand Line c/w Rig-mounted hydraulic system with 200 Gallon Tan, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship jacks, power tong, two Pullmaster PL5 Deck winches, etc.

2000 Freightliner Pump Truck Conventional s/n 1FVUF7WB1YPG53125 equipped with Rock Well 941 Spring-ride front axle rate at 16000lb mounted on 385/65R22.5 tires with polished aluminum wheels, air-operated brakes and ABS braking system. Tri-drive rear axels rated at 19000lb each, equipped with air-ride suspension mounted on 11R24.5 tires with polished aluminum wheels, air-operated brakes & ABS braking system. c/w Fuel tanks and locking storage compartments.



Saskatchewan
Personal Property Registry
Search Result

General Property

c/w Cummins Model Signature 600 15L Diesel Engine s/n 14004589
c/w Eaton RTLO-20918B 18 speed manual transmission s/n 70333492-02
c/w hydraulic system, reservoir tank, power take-off, and two-stage hydraulic pump.
c/w Tulsa 30BBX4L2F 30000lb winch s/n 32700051
c/w Eweco E300 triplex mud pump, 330hp 35000kPa wp, 5"x5" c/w forged fluoid end, quick change heads, 5 valve manifold pulsation dampener, Bowie charge pump with 2" pressure gauge and relief valve.
c/w steel fabricated 163.5bbl mud tank s/n 16980 with settling-trough, two compartments with valves, degasser
c/w flow line, chiksans and mud hoses.

Traveling & Rig Floor Equipment consists of McKissick Fig 83AWT-20, 75 ton traveling block assembly s/n 06-353-54 with three 20" sheaved grooves. C/w set Foster 93R Hydraulic power tubing tongs, set of weld less elevator links s/n 05254-1, 150 ton capacity, Canglobal Model Clipper weight indicator, 0-90000-daN, calibrated to 62000-daN s/n C1237, Cavins depthometer for 14.28MM sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n 06-197, 179-mm (7-1/16 in) x 35,000kPa (5,000-psi) wp, Nace Trim, Spool, 179-mm (7-1/16 in) x 21,000kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2 7/8-in (73-mm). s/n 114043 & 114044. Lot of saver subs, 2 7/8-in (73-mm) & 3 1/2- in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubingspider s/n 2646w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips s/n 74742-3 w/ 60 to 89-mm dies. Set AOT Type TA-100 s/n 74200 , 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico 554-578-600, 25-ton rod hook s/n H0406006 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings, lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guilberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Retired Doghouse Building & Contents - 1976 (rebuilt 2006) shop-built mobile doghouse trailer s/n 30671T, 8ftx30ft mounted on tandem 10000lbs axels c/w change shack.

Doghouse Building & Contents - 2009 Shop-built mobile doghouse trailer s/n MWS200902; 9-ft x 32-ft mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant s/n X06B070573; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed Incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

Auxiliary Truck - 1999 Sterling tandem-axel truck s/n 2FZXKWB4XAA33315. FL941 spring-ride front axle rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's airride seat, tire chains, chalks etc. GVWR 56,000lbs. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9TL21455 rated @ 300-hp @ 2100 rpm. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8ftx20ft. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes,



**Saskatchewan
Personal Property Registry
Search Result**

General Property

BOP
stand, tong rack, lubricator rack, etc.

Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, Two SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs,

Rig 2 2006 Exact Model Low-Rider 5-axle self-propelled back-in carrier s/n 2E9RSZ5Z96R073007. Tandem steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform.
c/w 2006 Cheyenne 21.9-m (72-ft) square tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly.
c/w Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-Omatic crown saver.
c/w Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm.
c/w Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off.
c/w Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline.
c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship, jacks, power tong,
(2) Pullmaster PL5 deck winches, etc.
c/w Class II carrier-mounted 22-gal accumulatorsystem.

2003 Western Star Model 4964S tandem-axel pump truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, fuel tanks, revolving beacons, chalks etc.
c/w ISX diesel engine s/n 14004589 rated at 425-hp.
c/w Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250
c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 26-m³ (163.5- bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 059-1764 w/ (3) 20-in sheaves grooved for 7-in line. Set Gill Model 500 hydraulic power tubing tongs s/n 500-896. Set x 1-3/4-in x 72-in weld less elevator links s/n 06100-1 and 06100-2 (and/or 06099-1, 06099-2), 150-ton capacity. Schwab's Model Clipper weight indicator s/n 1551, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - Shaffer Model LWP double-gate ram preventer s/n 10641, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp, Nace Trim. Spool s/n 60986-01, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve.
BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 27-in (73-mm). Lot of saver subs, 27-in (73-



Saskatchewan
Personal Property Registry
Search Result

General Property

mm)
& 3½-in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-542-400, 25-ton rod hook s/n H0606136 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents (new unit under construction) - 2010 Shop-built mobile doghouse trailer s/n MWS201002, approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant: Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30 kW generator c/w day tank, electric start & switchgear s/n M11C110969. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

Auxiliary truck - 2000 Western Star Model 4964S tandem axel truck s/n 2WKPDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 3 2007 Crane Model W55853C006 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square-tubing stiff mast s/n KE-5042, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly c/w Cooper double-drum drawworks s/n 1949 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R0949883 rated @ 425-hp @



**Saskatchewan
Personal Property Registry
Search Result**

General Property

2300

rpm.

c/w Transmission; Allison Model HT750- DRDB torque-tube-drive automatic 5- speed transmission s/n M5610A

w/ power take-off.

c/w Namco Model right angle drive box.

c/w Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (14.28-mm) sandline.

c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold,

filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2)

Pullmaster Model PL5 deck winches, etc.

c/w Class II carrier-mounted 22-gal accumulator system

2000 Western Star Model 4986FX tridrive truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front

axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of

tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride

axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread

remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks,

revolving beacons, chalks etc.

c/w Cat Model 3406E diesel engine s/n 2WS19060 rated at 550-hp; 14.6-litre. Transmission; Eaton Model RTLO-

20918B, 18-speed manual transmission.

c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.

c/w Tulsa Model 30BBX4L2F winch; 30,000-lb 32700063

c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-

change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.

c/w Mud Tank; Steel-fabricated 28-m³ (163.5- bbl) mud tank with settling-trough, two compartments w/ valves, degasser

"Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147..

Set x

1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated

to 62,000-daN. Cavins depthometer for 14.28-mm sandline."

B.O.P. Equipment - IEI double-gate ram Preventer s/n 05-059 (and/or 06-197), 179-mm (7-1/16 in) x 35,000-kPa

(5,000-psi) wp, Nace Trlm. Spool s/n 45468-ACD-4 (and/or 48558-ACD-4), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/

Two 51-mm outlet valves. BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 27-in (73-mm). Lot of

saver subs, 27-in (73-mm) & 3½-in (89-mm).

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider s/n MSM04681 w/ 3 1/2-in (89-mm) slip

body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA65, 65-ton 60-mm (2- 3/8 in) tubing elevators s/n

63068. Set AOT Type TA-100; 100-ton 73 mm (2-7/8 in) tubing elevators s/n 87752, Trico Model 554-578-600, 25-ton rod hook

s/n H1017020. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide.

Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Gulbberson type HD tandem oil saver w/ high pressure pump & hose.

Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels,

rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-

kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1989 Custom-built mobile doghouse trailer s/n MWS03; approximately 8-ft wide x

26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section.



Saskatchewan
Personal Property Registry
Search Result

General Property

Doghouse Building & Contents - 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lbs tandem-axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T s/n 75ZXL03.1GTB 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Auxiliary Truck; 1995 Freightliner Conventional tandem-axel truck s/n 1FVX3EDB3SP599554 equipped w/ Rock Well Model 941 spring-ride front axel mounted on 385/65R22.5 tires w/ approximately 8- mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9CK15423 rated @ 350-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig support equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30 minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 5 2008 Irontech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 10-mm of tread remaining & ABS braking system. Meritor singlereduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 21-mm of tread remaining & ABS braking system. Singleman insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Irontech Model 72-140S freestanding stiff mast /sn MO-45-07 72-ft 21.9-m), 150,000-lbs (66,720-daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly. c/w Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks s/n 9.KK.01.08 (splash-cooled & belt driven) c/w crown-saver & brakes. c/w Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 425- hp @ 2100 rpm. c/w Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. c/w Rig-up right angel gear box GP.54.08 Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. c/w Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043

2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK4SPN91874. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. c/w Detroit Series 60, 14-litre turbo diesel drive engine s/n 05R0801867, rated @ 500-hp @ 1800 rpm. c/w Transmission; Allison Model 4700 OFS 5- speed automatic transmission w/ power take-off.



Saskatchewan
Personal Property Registry
Search Result

General Property

c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ 176- bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 1759866 w/ (3) 20-in sheaves grooved for 7-in line. Set Tillery & Parks Type 5890- hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator s/n C1240, 0-90,000-daN, calibrated to 62,000-daN.
Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (API) double-gate ram Preventer s/n 05-059, 179- mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2t) HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide.
Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ plck-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Auxiliary truck 2000 Western Star Model 4964SX tandem-axel truck s/n 2WLPCD2G5YK960249 w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ approximately 14-mm of tread remaining, air - operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model C12, 12-L turbo-charged diesel engine s/n 2KS03838rated @ 425-hp @ 1800. Transmission; Eaton Model RTLO- 16918B, 18-speed manual transmission.
Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shelds, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, high angle rescue kit, etc. Lot of general rig tools including hand wrenches,



Saskatchewan
Personal Property Registry
Search Result

General Property

screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 7 1978 (rebuilt 2009) Cardwell K150 Mobile Rig Carrier; - 1978 Cardwell Model B140, 4-axle self-propelled back-in carrier s/n 78244. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast s/n CE-4544, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 04RE102775 rated @ 665-hp @ 2300 rpm. c/w Transmission s/n 2510014086; Allison Model CLT750 torque tube drive automatic transmission. c/w Bevel right angle drive box. c/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-inch (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

Unit PT- 07: 1996 Peterbilt Pump Truck - 1996 Peterbilt truck s/n 1XPALB9XZTN392850 equipped w/ spring-ride front axle mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. c/w Engine; Cat Model 3406E diesel engine rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w low line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift



Saskatchewan Personal Property Registry Search Result

General Property

mandrels,
rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 2001 mobile doghouse trailer 2C9HB460812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Auxiliary Truck - 1986 Kenworth tandem-axel truck s/n 2XKWDBUX2GM915179. Spring-ride front axel mounted on steel wheels equipped w/ air - operated brakes. Air-ride rear axels mounted on steel wheels. Steel-constructed carrier deck. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 6 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n1CYEGW6879T049305. Tandem steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in toolboxes, fuel tanks, wing walk and adjustable working platform. C/w Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast s/n 09.08.015, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly. C/w Drawworks; KIn Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40- in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. C/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R1006764 rated @ 665-hp @ 2300 rpm. C/w Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. C/w Namco Model M94-RA45041 right angle drive box s/n N07-16002C/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. C/w Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc

2000 Kenworth Model T800 truck s/n 1NK0LBEX9Y5959499 equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. c/w Engine; Cat Model 3406E diesel engine s/n 2WS31358 rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.



**Saskatchewan
Personal Property Registry
Search Result**

General Property

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 875792 w/ (3) 24-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. Set x 1-3/4-in x 72-in weld less elevator links s/n 150T072/71, 150-ton capacity. Canglobal Model Clipper weight indicator s/n 28528, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n K08-092, 179-mm (7-1/16 in) x 35,000- kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis s/n s/n H1208060. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

"Doghouse Building & Components - 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant s/n 49606; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 55-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet."

Auxiliary Truck - 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ airride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ approximately 27-mm of tread remaining, air - operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine s/n GNZ87182 rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

"Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc."
"The goods described herein, wherever situated, and all present and after-acquired intellectual property,



**Saskatchewan
Personal Property Registry
Search Result**

General Property

intangibles, attachments, accessories and accessions thereto and spare parts, replacements, substitutions, exchanges and trade-ins therefor, and all rights, receivables and chattel paper derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto.

Proceeds: all of the Debtor's present and after-acquired personal property which is derived directly or indirectly from any dealing with or disposition of the above-described collateral, including, without limiting the generality of the foregoing, all insurance and other payments payable as indemnity or compensation for loss or damage thereto and all chattel paper, documents of title, goods, instruments, intangibles, money and securities

INTERNAL REFERENCE: ESA #8754190001 and #150011594277

One (1) 2006 Western Star 4900 Pump Truck s/n 5KJRALCV86PV36016
c/w Empire E-300 5x6 pump and deckage, serial number 2008-08-03
c/w 5 valve manifold 5000#, line pipe and Alberta spec 26m3 rig tank

Internal reference: ESA cross #8774698001.

History - Amendment

Registration #: 300954843
Transaction #: 6

Amendment Date: 09-Apr-2013 16:15:27

Event Type: Amendment
Transaction Reason: Regular

Transaction Description: Addition of collateral

Registrant

| | |
|---|------------------------------------|
| Party ID: 150589749 - 1 | Address: 3318 Millar Avenue |
| Entity Type: Business | Saskatoon, Saskatchewan |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | S7K7G9 Canada |

Serial Property

| | |
|------------------------------------|------------------------------|
| Action: Add | Year: 2012 |
| Item #: 36 | Make/Desc.: Rykar Rig |
| Serial Type: Motor Vehicle | Model: SR500 |
| Serial #: 2RCR545D4C16F8393 | Color: |
| Override: No | |

General Property

Rig 1 2006 Exact Low Rider Mobile Rig Carrier s/n 2E9RSZ5Z36R073004. 5-axle self-propelled back-in carrier. Tandem-steer front axels rated at 20000lb each, equipped with polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23000lb each, mounted on polished aluminum wheels equipped with 12R22.5 tires w/ approximately 22mm of tread remaining & ABS braking system. Single-man insulated cab with controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9m square Tubing Stiff Mast s/n 04-06-039. MDL 72-150, 66, 720 daN hook-load capacity with 4-lines, primary & secondary fall arreset systems, 2" standpipe & six sheave crown assembly. c/w 2006 SJ Petro XJ250S double-drum Drawworks with LEBUS grooving. main drum 10"x38". Sandline drum 38"x8" c/w crown-saver, SJ Petro band 36", Model 122 hydromantic brake clutch, mechanical drum brake & Crown-o-Matic Crown Saver. c/w Detroit series 60 14.0L turbo-charged diesel drive engine s/n 06R0886197 rated @ 425hp @ 2300 rpm. c/w Allison HT750-DRDDB Torque Tube Drive Automatic 5 speed transmission with power take-off. c/w Namco right angle drive box c/w 1" Drill Line and 0.5" Sand Line c/w Rig-mounted hydraulic system with 200 Gallon Tan, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship jacks, power tong, two Pullmaster PL5 Deck



**Saskatchewan
Personal Property Registry
Search Result**

General Property

winches, etc.

2000 Freightliner Pump Truck Conventional s/n 1FVUF7WB1YPG53125 equipped with Rock Well 941 Spring-ride front axle rate at 16000lb mounted on 385/65R22.5 tires with polished aluminum wheels, air-operated brakes and ABS braking system. Tri-drive rear axels rated at 19000lb each, equipped with air-ride suspension mounted on 11R24.5 tires with polished aluminum wheels, air-operated brakes & ABS braking system. c/w Fuel tanks and locking storage compartments. c/w Cummins Model Signature 600 15L Diesel Engine s/n 14004589 c/w Eaton RTLO-20918B 18 speed manual transmission s/n 70333492-02 c/w hydraulic system, reservoir tank, power take-off, and two-stage hydraulic pump. c/w Tulsa 30BBX4L2F 30000lb winch s/n 32700051 c/w Eweco E300 triplex mud pump, 330hp 35000kPa wp, 5"x5" c/w forged fluuid end, quick change heads, 5 valve manifold pulsation dampener, Bowle charge pump with 2"pressure gauge and relief valve. c/w steel fabricated 163.5bbl mud tank s/n 16980 with settling-trough, two compartments with valves, degasser c/w flow line, chiksans and mud hoses.

Traveling & Rig Floor Equipment consists of McKissick Fig 83AWT-20, 75 ton traveling block assembly s/n 06-353-54 with three 20" sheaved grooves. C/w set Foster 93R Hydraulic power tubing tongs, set of weld less elevator links s/n 05254-1, 150 ton capacity, Canglobal Model Clipper weight indicator, 0-90000-daN, calibrated to 62000-daN s/n C1237, Cavins depthometer for 14.28MM sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n 06-197, 179-mm (7-1/16 in) x 35,000kPa (5,000-psi) wp, Nace Trim, Spool, 179-mm (7-1/16 in) x 21,000kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2 7/8-in (73-mm). s/n 114043 & 114044. Lot of saver subs, 2 7/8-in (73-mm) & 3 1/2- in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubingspider s/n 2646w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips s/n 74742-3 w/ 60 to 89-mm dies. Set AOT Type TA-100 s/n 74200 , 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico 554-578-600, 25-ton rod hook s/n H0406006 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings, lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Retired Doghouse Building & Contents - 1976 (rebuilt 2006) shop-built mobile doghouse trailer s/n 30671T, 8ftx30ft mounted on tandem 10000lbs axels c/w change shack.

Doghouse Building & Contents - 2009 Shop-built mobile doghouse trailer s/n MWS200902; 9-ft x 32-ft mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant s/n X06B070573; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

Auxiliary Truck - 1999 Sterling tandem-axle truck s/n 2FZXKWYB4XAA33315. FL941 spring-ride front axle rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread



**Saskatchewan
Personal Property Registry
Search Result**

General Property

remaining, air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's airride seat, tire chains, chocks etc. GVWR 56,000lbs. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9TL21455 rated @ 300-hp @ 2100 rpm. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8ftx20ft. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, Two SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs,

Rig 2 2006 Exact Model Low-Rider 5-axle self-propelled back-in carrier s/n 2E9RSZ5Z96R073007. Tandem steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9-m (72-ft) square tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-Omatic crown saver. c/w Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm. c/w Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. c/w Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship, jacks, power tong, (2) Pullmaster PL5 deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

2003 Western Star Model 4964S tandem-axle pump truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axle rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air - operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, fuel tanks, revolving beacons, chocks etc. c/w ISX diesel engine s/n 14004589 rated at 425-hp. c/w Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250 c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 26-m³ (163.5- bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 059-1764 w/ (3) 20-in sheaves grooved for 7-in line. Set Gill Model 500 hydraulic power tubing tongs s/n 500-896. Set x 1-3/4-in x 72-in



**Saskatchewan
Personal Property Registry
Search Result**

General Property

weld
less elevator links s/n 06100-1 and 06100-2 (and/or 06099-1, 06099-2), 150-ton capacity. Schwab's Model Clipper weight indicator s/n 1551, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - Shaffer Model LWP double-gate ram preventer s/n 10641, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp, Nace Trim. Spool s/n 60986-01, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve.
BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 27-in (73-mm). Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-542-400, 25-ton rod hook s/n H0606136 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents (new unit under construction) - 2010 Shop-built mobile doghouse trailer s/n MWS201002, approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant: Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30 kW generator c/w day tank, electric start & switchgear s/n M11C110969. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoletoilet.

Auxiliary truck - 2000 Western Star Model 4964S tandem axel truck s/n 2WKPDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 3 2007 Crane Model W55853C006 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel



**Saskatchewan
Personal Property Registry
Search Result**

General Property

tanks, wing walk and adjustable working platform.
c/w 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square-tubing stiff mast s/n KE-5042, 120,000-lb (62,000-daN)
hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly
c/w Cooper double-drum drawworks s/n 1949 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in).
Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver.
c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R0949883 rated @ 425-hp @ 2300 rpm.
c/w Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5- speed transmission s/n M5610A
w/ power take-off.
c/w Namco Model right angle drive box.
c/w Drill & Sandline; 7/8-inch (25.4-mm) drilline & 1/2-in (14.28-mm) sandline.
c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
c/w Class II carrier-mounted 22-gal accumulator system

2000 Western Star Model 4986FX tridrive truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axle rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chawks etc.
c/w Cat Model 3406E diesel engine s/n 2WS19060 rated at 550-hp; 14.6-litre. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.
c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb 32700063
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ (163.5- bbl) mud tank with settling-trough, two compartments w/ valves, degasser

"Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline."

B.O.P. Equipment - IEI double-gate ram Preventer s/n 05-059 (and/or 06-197), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool s/n 45468-ACD-4 (and/or 48558-ACD-4), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ Two 51-mm outlet valves. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2?-in (73-mm). Lot of saver subs, 2?-in (73-mm) & 3½-in (89-mm).

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider s/n MSM04681 w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA65, 65-ton 60-mm (2- 3/8 in) tubing elevators s/n 63068. Set AOT Type TA-100; 100-ton 73 mm (2-7/8 in) tubing elevators s/n 87752, Trico Model 554-578-600, 25-ton rod hook s/n H1017020. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide.
Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose.



Saskatchewan Personal Property Registry Search Result

General Property

Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1989 Custom-built mobile doghouse trailer s/n MWS03; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section.

Doghouse Building & Contents - 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lbs tandem-axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T s/n 75ZXL03.1GTB 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Auxillary Truck; 1995 Freightliner Conventional tandem-axel truck s/n 1FVX3EDB3SP599554 equipped w/ Rock Well Model 941 spring-ride front axel mounted on 385/65R22.5 tires w/ approximately 8- mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9CK15423 rated @ 350-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig support equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30 minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 5 2008 Irontech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 10-mm of tread remaining & ABS braking system. Meritor singlereduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 21-mm of tread remaining & ABS braking system. Singleman insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Irontech Model 72-140S freestanding stiff mast /sn MO-45-07 72-ft 21.9-m), 150,000-lbs (66,720-daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly. c/w Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks s/n 9.KK.01.08 (splash-cooled & belt driven) c/w crown-saver & brakes. c/w Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 425- hp @ 2100 rpm. c/w Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. c/w Rig-up right angel gear box GP.54.08 Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. c/w Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043

2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK4SPN91874. Meritor Model FL941 spring-ride front



**Saskatchewan
Personal Property Registry
Search Result**

General Property

axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks, revolving beacons, chocks etc. c/w Detroit Series 60, 14-litre turbo diesel drive engine s/n 05R0801867, rated @ 500-hp @ 1800 rpm. c/w Transmission; Allison Model 4700 OFS 5- speed automatic transmission w/ power take-off. c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 28-m³ 176- bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 1759866 w/ (3) 20-in sheaves grooved for 7-in line. Set Tillery & Parks Type 5890- hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator s/n C1240, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (API) double-gate ram Preventer s/n 05-059, 179- mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, studs, nuts, (2t) HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Auxiliary truck 2000 Western Star Model 4964SX tandem-axel truck s/n 2WLPCD2G5YK960249 w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ approximately 14-mm of tread remaining, air - operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks, revolving beacons, chocks etc. Cat Model C12, 12-L turbo-charged diesel engine s/n 2KS03838 rated @ 425-hp @ 1800. Transmission; Eaton Model RTLO- 16918B, 18-speed manual transmission. Transport



Saskatchewan
Personal Property Registry
Search Result

General Property

body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, high angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 7 1978 (rebuilt 2009) Cardwell K150 Mobile Rig Carrier; - 1978 Cardwell Model B140, 4-axle self-propelled back-in carrier s/n 78244. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast s/n CE-4544, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 04RE102775 rated @ 665-hp @ 2300 rpm. c/w Transmission s/n 2510014086; Allison Model CL750 torque tube drive automatic transmission. c/w Bevel right angle drive box. c/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

Unit PT- 07: 1996 Peterbilt Pump Truck - 1996 Peterbilt truck s/n 1XPALB9XZTN392850 equipped w/ spring-ride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. c/w Engine; Cat Model 3406E diesel engine rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w low line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-



Saskatchewan
Personal Property Registry
Search Result

General Property

7/8 in)
tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide.
Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-In 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose.
Lubricator; (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 2001 mobile doghouse trailer 2C9HB460812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incholet Model WB electric toilet.

Auxiliary Truck - 1986 Kenworth tandem-axel truck s/n 2XKWDBUX2GM915179. Spring-ride front axel mounted on steel wheels equipped w/ air - operated brakes. Air-ride rear axels mounted on steel wheels. Steel-constructed carrier deck. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 6 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n1CYEGW6879T049305.
Tandem steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in toolboxes, fuel tanks, wing walk and adjustable working platform.C/w Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast s/n 09.08.015, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly.C/w Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40- in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. C/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R1006764 rated @ 665-hp @ 2300 rpm. C/w Transmission; Allison Model HT750 DR torque-tube drive automatic transmission.C/w Namco Model M94-RA45041 right angle drive box s/n N07-16002C/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline.C/w Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc

2000 Kenworth Model T800 truck s/n 1NK0LBEX9Y5959499 equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. c/w Engine; Cat Model 3406E diesel engine s/n 2WS31358 rated at 475-hp.



Saskatchewan
Personal Property Registry
Search Result

General Property

c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission.
c/w Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 875792 w/ (3) 24-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. Set x 1-3/4-in x 72-in weld less elevator links s/n 150T072/71, 150-ton capacity. Canglobal Model Clipper weight indicator s/n 28528, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n K08-092, 179-mm (7-1/16 in) x 35,000- kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. Two HI-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis s/n s/n H1208060. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

"Doghouse Building & Components - 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant s/n 49606; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 55-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet."

Auxiliary Truck - 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ airride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ approximately 27-mm of tread remaining, air - operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine s/n GNZ87182 rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

"Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs,



Saskatchewan
Personal Property Registry
Search Result

General Property

safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket,
(2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches,
screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts,
valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc."
"The goods described herein, wherever situated, and all present and after-acquired intellectual property, intangibles, attachments, accessories and accessions thereto and spare parts, replacements, substitutions, exchanges and trade-ins therefor, and all rights, receivables and chattel paper derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto.
Proceeds: all of the Debtor's present and after-acquired personal property which is derived directly or indirectly from any dealing with or disposition of the above-described collateral, including, without limiting the generality of the foregoing, all insurance and other payments payable as indemnity or compensation for loss or damage thereto and all chattel paper, documents of title, goods, instruments, intangibles, money and securities
"

INTERNAL REFERENCE: ESA #8754190001 and #150011594277

One (1) 2006 Western Star 4900 Pump Truck s/n 5KJRALCV86PV36016
c/w Empire E-300 5x6 pump and deckage, serial number 2008-08-03
c/w 5 valve manifold 5000#, line pipe and Alberta spec 26m3 rig tank

Internal reference: ESA cross #8774698001.

2012 RYKAR MODEL SR500 FREESTANDING DOUBLE SERVICE RIG SERIAL NUMBER 2RCR545D4C16F8393 c/w ALL ATTACHMENTS INCLUDING:
NEW SERIES 60 DETROIT DIESEL ENGINE C/W THE FOLLOWING:
RADIATOR C/W AIR TO AIR
WATEROUS PANEL, OIL COOLER, FARR AIR CLEANER
POWER STEERING PUMP C/W ADAPTER GEAR
AIR COMPRESSOR, ALTERNATOR, STARTER
BENDIXFAN HUB AND FAN
AIR TO AIR PIPING AND HOSE KIT
TURBO FLANGE AND CLAMP
RIG SAVER, WILLIAMS CONTROL, COWL MUFFLER
ALLISON OFS 4700 ELECTRONIC TRANSMISSION C/W FILTERS AND NANCO DROP BOX
ENGINE AND TRANSMISSION MOUNTED ON MASTER SKID
NEW 5 AXLE CARRIER, ALL HYDRAULICS AND WIRING
RYKAR DRAWWORKS, 42X10 MAIN DRUM, 38X8 SANDLINE DRUM, 1' LEBUS GROOVING ON MAIN DRUM
KOBELT DISC BRAKE C/W CALIPER
20000# TANDEM FRONT AXLES C/W ABS BRAKES, REYCO SUSPENSION
44000# ROCKWELL REAR AXLES, TRI-DRIVE, C/W NEWAY AIR RIDE
SINGLE MAN CAB C/W AIR RIDE SEAT, HEATER, FAN, ALL GAUGES
WABCO AIR SYSTEM
852 CHELSEA PTO, C/W TANDEM HYDRAULIC PUMP
2 STATION ACCUMULATOR SYSTEM S/W NITROGEN BACK UP SYSTEM
125 GAL. ALUMINUM FUEL TANK
COMPLETE 12 VOLT ELECTRICAL SYSTEM C/W LOCK OUT SWITCHES
2 - 8000# RATED WINCHES
ALL DRIVING LIGHTS, MIRRORS, MUD FLAPS, ETC.
4 NEW 445/65R22.5 RADIAL TIRES C/W 4 ALUMINUM RIMS, 12 NEW 12/R22.5 RADIAL TIRES C/W 12 ALUMINUM RIMS
TOOL BOXES
MAST WIRING C/W INCANDESCENT LIGHTS
MANUAL OUTRIGGERS (QT100 PLATE)
6 FT. RIG FLOOR C/W FOLD OUT WINGS, C/W ALL HANDRAILS
HYDRAULIC TANK, MINIMUM CAPACITY 250 GALS
ALL WALKWAY'S PULLOUT ON ROLLERS
MCKISSICK DIVIDING BLOCK AND HOOK ASSEMBLY - 100 TON
1200' 1" DRILL LINE
SET OF TUBING ELEVATORS; 2 7/8" EUE BVM TA100 TON AND 2 3/8" EUE BVM TA100 TON
SET OF KING ELEVATOR LINKS - 72" X 1 1/2"
ALL STAIRS COMING OFF CARRIER - ALUMINIM C/W HANDRAILS
FOLD UP BASE BEAM
GUYLINES FROM MONKEY BOARD TO OUTRIGGERS
CROWN LINES TO CARRIER
SANDBLAST AND PAINT CUSTOMER COLORS (NOTE: 2 COLORS)
CVIP CERTIFICATION NSM CERTIFICATION
NSM CERTIFICATION



**Saskatchewan
Personal Property Registry
Search Result**

General Property

COMPLETE MANUAL WITH ALL PART NUMBERS, ETC.

Internal reference: ESA cross #8775251001.

History - Amendment

**Registration #: 300954843
Transaction #: 7**

Amendment Date: 28-Jun-2013 08:52:29

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 Canada |

Serial Property

| | |
|------------------------------------|---------------------------------|
| Action: Add | Year: 1999 |
| Item #: 37 | Make/Desc.: Western Star |
| Serial Type: Motor Vehicle | Model: 4964FX |
| Serial #: 2WKPDDCJ8WK950999 | Color: |
| Override: No | |

History - Amendment

**Registration #: 300954843
Transaction #: 8**

Amendment Date: 12-Aug-2013 11:46:55

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|---|------------------------------------|
| Party ID: 150589749 - 1 | Address: 3318 Millar Avenue |
| Entity Type: Business | Saskatoon, Saskatchewan |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | S7K7G9 Canada |

Serial Property

| | |
|------------------------------------|-----------------------------------|
| Action: Delete | Year: 1986 |
| Item #: 30 | Make/Desc.: Kenworth Truck |
| Serial Type: Motor Vehicle | Model: |
| Serial #: 2XKWDBUX2GM915179 | Color: |
| Override: Yes | |
| Action: Delete | Year: 1986 |
| Item #: 33 | Make/Desc.: Kenworth |
| Serial Type: Motor Vehicle | Model: |
| Serial #: 2XKWDBOX2GM915179 | Color: |
| Override: No | |

General Property

Rig 1 2006 Exact Low Rider Mobile Rig Carrier s/n 2E9RSZ5Z36R073004. 5-axle self-propelled back-in carrier. Tandem-steer front axels rated at 20000lb each, equipped with polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23000lb each, mounted on polished aluminum wheels equipped with 12R22.5 tires w/ approximately 22mm of tread remaining & ABS braking system. Single-man insulated cab with controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform.



**Saskatchewan
Personal Property Registry
Search Result**

General Property

c/w 2006 Cheyenne 21.9m square Tubing Stiff Mast s/n 04-06-039. MDL 72-150, 66, 720 daN hook-load capacity with 4-lines, primary & secondary fall arreset systems, 2" standpipe & six sheave crown assembly.
c/w 2006 SJ Petro XJ250S double-drum Drawworks with LEBUS grooving. main drum 10"x38". Sandline drum
38"x8" c/w crown-saver, SJ Petro band 36", Model 122 hydromantic brake clutch, mechanical drum brake & Crown-o-Matic Crown Saver.
c/w Detroit series 60 14.0L turbo-charged diesel drive engine s/n 06R0886197 rated @ 425hp @ 2300 rpm.
c/w Allison HT750-DRDDB Torque Tube Drive Automatic 5 speed transmission with power take-off.
c/w Namco right angle drive box
c/w 1" Drill Line and 0.5" Sand Line
c/w Rig-mounted hydraulic system with 200 Gallon Tan, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship jacks, power tong, two Pullmaster PL5 Deck winches, etc.

2000 Freightliner Pump Truck Conventional s/n 1FVUF7WB1YPG53125 equipped with Rock Well 941 Spring-ride front axel rate at 16000lb mounted on 385/65R22.5 tires with polished aluminum wheels, air-operated brakes and ABS braking system. Tri-drive rear axels rated at 19000lb each, equipped with air-ride suspension mounted on 11R24.5 tires with polished aluminum wheels, air-operated brakes & ABS braking system. c/w Fuel tanks and locking storage compartments.
c/w Cummins Model Signature 600 15L Diesel Engine s/n 14004589
c/w Eaton RTLO-20918B 18 speed manual transmission s/n 70333492-02
c/w hydraulic system, reservoir tank, power take-off, and two-stage hydraulic pump.
c/w Tulsa 30BBX4L2F 30000lb winch s/n 32700051
c/w Eweco E300 triplex mud pump, 330hp 35000kPa wp, 5"x5" c/w forged fluuid end, quick change heads, 5 valve manifold pulsation dampener, Bowie charge pump with 2"pressure gauge and relief valve.
c/w steel fabricated 163.5bbl mud tank s/n 16980 with settling-trough, two compartments with valves, degasser
c/w flow line, chiksans and mud hoses.

Traveling & Rig Floor Equipment consists of McKissick Fig 83AWT-20, 75 ton traveling block assembly s/n 06-353-54 with three 20" sheaved grooves. C/w set Foster 93R Hydraulic power tubing tongs, set of weld less elevator links s/n 05254-1, 150 ton capacity, Canglobal Model Clipper weight indicator, 0-90000-daN, calibrated to 62000-daN s/n C1237, Cavins depthometer for 14.28MM sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n 06-197, 179-mm (7-1/16 in) x 35,000kPa (5,000-psi) wp, Nace Trim, Spool, 179-mm (7-1/16 in) x 21,000kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2 7/8-in (73-mm). s/n 114043 & 114044. Lot of saver subs, 2 7/8-in (73-mm) & 3 1/2- in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubingspider s/n 2646w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips s/n 74742-3 w/ 60 to 89-mm dies. Set AOT Type TA-100 s/n 74200 , 100-ton, 2-3/8-in (60-mm) tubing elevators. Set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico 554-578-600, 25-ton rod hook s/n H0406006 w/ clevis. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings, lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Retired Doghouse Building & Contents - 1976 (rebuilt 2006) shop-built mobile doghouse trailer s/n 30671T, 8ftx30ft mounted on tandem 10000lbs axels c/w change shack.

Doghouse Building & Contents - 2009 Shop-built mobile doghouse trailer s/n MWS200902; 9-ft x 32-ft mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 13-mm of



Saskatchewan
Personal Property Registry
Search Result

General Property

tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant s/n X06B070573; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet.

Auxiliary Truck - 1999 Sterling tandem-axel truck s/n 2FZXKWYB4XAA33315. FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air - operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's airride seat, tire chains, chocks etc. GVWR 56,000lbs. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9TL21455 rated @ 300-hp @ 2100 rpm. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8ftx20ft. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, Two SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs,

Rig 2 2006 Exact Model Low-Rider 5-axle self-propelled back-in carrier s/n 2E9RSZ5Z96R073007. Tandem steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w 2006 Cheyenne 21.9-m (72-ft) square tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-Omatic crown saver. c/w Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm. c/w Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. c/w Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, two rear levelling jacks & two midship, jacks, power tong, (2) Pullmaster PL5 deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

2003 Western Star Model 4964S tandem-axel pump truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air - operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks, revolving beacons, chocks etc. c/w ISX diesel engine s/n 14004589 rated at 425-hp.



Saskatchewan
Personal Property Registry
Search Result

General Property

c/w Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250
c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa
wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in
pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 26-m³ (163.5- bbl) mud tank with settling-trough, two compartments, w/
valves,
degasser, c/w flow line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 059-1764
w/ (3)
20-in sheaves grooved for 7-in line. Set Gill Model 500 hydraulic power tubing tongs s/n 500-896. Set x 1-3/4-in x 72-in
weld
less elevator links s/n 06100-1 and 06100-2 (and/or 06099-1, 06099-2), 150-ton capacity. Schwab's Model Clipper weight
indicator s/n 1551, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - Shaffer Model LWP double-gate ram preventer s/n 10641, 179-mm (7-1/16 in) x 21,000-
kPa
(3,000-psi) wp, Nace Trim. Spool s/n 60986-01, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet
valve.
BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2?-in (73-mm). Lot of saver subs, 2?-in (73-
mm)
& 3½- in (89-mm).

Tubing & Rod Handling Equipment - Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip
body. Set
Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. Set
BJ
100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-542-400, 25-ton rod hook s/n H0606136 w/ clevis. Two
Rod
elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x
21,000-
kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints,
60-
mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose.
Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift
mandrels,
rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x
21,000-
kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents (new unit under construction) - 2010 Shop-built mobile doghouse trailer s/n
MWS201002, approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air -
operated
brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office,
utility &
light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge,
desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant: Isuzu
Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30 kW generator c/w day tank, electric start & switchgear s/n
M11C110969. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants,
slings,
chains, w/ electric heater, grinder, vice, work benches & Incholet toilet.

Auxiliary truck - 2000 Western Star Model 4964S tandem axel truck s/n 2WKPDDJH4YK962165. Meritor
Model
FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires
w/ air -
operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum
wheels
mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire
chains, chocks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm. Transmission; Eaton
Model RTLO-
16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-
back
access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs,
safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire



Saskatchewan
Personal Property Registry
Search Result

General Property

blanket,
(2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 3 2007 Crane Model W55853C006 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform.

c/w 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square-tubing stiff mast s/n KE-5042, 120,000-lb (62,000-daN)

hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly c/w Cooper double-drum drawworks s/n 1949 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in).

Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver.

c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R0949883 rated @ 425-hp @ 2300 rpm.

c/w Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5- speed transmission s/n M5610A

w/ power take-off.

c/w Namco Model right angle drive box.

c/w Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (14.28-mm) sandline.

c/w Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold,

filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2)

Pullmaster Model PL5 deck winches, etc.

c/w Class II carrier-mounted 22-gal accumulator system

2000 Western Star Model 4986FX tridrive truck s/n 2WLPSCDJ3YK962739. Western Model WS16 springride front

axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of

tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride

axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread

remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, dual fuel tanks,

revolving beacons, chalks etc.

c/w Cat Model 3406E diesel engine s/n 2WS19060 rated at 550-hp; 14.6-litre. Transmission; Eaton Model RTLO-

20918B, 18-speed manual transmission.

c/w Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump.

c/w Tulsa Model 30BBX4L2F winch; 30,000-lb 32700063

c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-

change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-In pressure gauge & relief valve.

c/wMud Tank; Steel-fabricated 28-m³ (163.5- bbl) mud tank with settling-trough, two compartments w/ valves, degasser

"Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147..

Set x

1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated

to 62,000-daN. Cavins depthometer for 14.28-mm sandline."

∩.O.P. Equipment - IEI double-gate ram Preventer s/n 05-059 (and/or 06-197), 179-mm (7-1/16 in) x 35,000-kPa

(5,000-psi) wp, Nace Trim. Spool s/n 45468-ACD-4 (and/or 48558-ACD-4), 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/

Two 51-mm outlet valves. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 2?-in (73-mm). Lot of



Saskatchewan Personal Property Registry Search Result

General Property

saver subs, 27-in (73-mm) & 3 1/2-in (89-mm).

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider s/n MSM04681 w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT Type TA65, 65-ton 60-mm (2- 3/8 in) tubing elevators s/n 63068. Set AOT Type TA-100; 100-ton 73 mm (2-7/8 in) tubing elevators s/n 87752, Trico Model 554-578-600, 25-ton rod hook s/n H1017020. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1989 Custom-built mobile doghouse trailer s/n MWS03; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section.

Doghouse Building & Contents - 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lbs tandem-axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T s/n 75ZXL03.1GTB 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Auxillary Truck; 1995 Freightliner Conventional tandem-axel truck s/n 1FVX3EDB3SP599554 equipped w/ Rock Well Model 941 spring-ride front axel mounted on 385/65R22.5 tires w/ approximately 8- mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine s/n 9CK15423 rated @ 350-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig support equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30 minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 5 2008 Irontech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 10-mm of tread remaining & ABS braking system. Meritor singlereduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 21-mm of tread remaining & ABS braking system. Singleman insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Irontech Model 72-140S freestanding stiff mast /sn MO-45-07 72-ft 21.9-m), 150,000-lbs (66,720-daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe &



**Saskatchewan
Personal Property Registry
Search Result**

General Property

five-sheave crown assembly.
c/w Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks s/n 9.KK.01.08 (splash-cooled & belt driven) c/w crown-saver & brakes.
c/w Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 425- hp @ 2100 rpm.
c/w Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off.
c/w Rig-up right angel gear box GP.54.08 Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
c/w Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043

2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK4SPN91874. Meritor Model FL941 spring-ride front axle rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc.
c/w Detroit Series 60, 14-litre turbo diesel drive engine s/n 05R0801867, rated @ 500-hp @ 1800 rpm.
c/w Transmission; Allison Model 4700 OFS 5- speed automatic transmission w/ power take-off.
c/w Hydraulic system; resevoir tank, power take-off & two-stage hydraulic pump.
c/w Tulsa Model 30BBX4L2F winch; 30,000-lb
c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve.
c/w Mud Tank; Steel-fabricated 28-m³ 176- bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly s/n 1759866 w/ (3) 20-in sheaves grooved for 7-in line. Set Tillery & Parks Type 5890- hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator s/n C1240, 0-90,000-daN, calibrated to 62,000-daN.
Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (API) double-gate ram Preventer s/n 05-059, 179- mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2t) Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide.
Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guilberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-



**Saskatchewan
Personal Property Registry
Search Result**

General Property

kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Auxillary truck 2000 Western Star Model 4964SX tandem-axel truck s/n 2WLPCD2G5YK960249 w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ approximately 14-mm of tread remaining, air - operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model C12, 12-L turbo-charged diesel engine s/n 2KS03838 rated @ 425-hp @ 1800. Transmission; Eaton Model RTLO- 16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, high angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

Rig 7 1978 (rebuilt 2009) Cardwell K150 Mobile Rig Carrier; - 1978 Cardwell Model B140, 4-axle self-propelled back-in carrier s/n 78244. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. c/w Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast s/n CE-4544, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. c/w Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203- mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. c/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 04RE102775 rated @ 665-hp @ 2300 rpm. c/w Transmission s/n 2510014086; Allison Model CLT750 torque tube drive automatic transmission. c/w Bevel right angle drive box. c/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. c/w Class II carrier-mounted 22-gal accumulator system.

Unit PT- 07: 1996 Peterbilt Pump Truck - 1996 Peterbilt truck s/n 1XPALB9XZTN392850 equipped w/ spring-ride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. c/w Engine; Cat Model 3406E diesel engine rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w low line, chiksans & mud hoses.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs. Set x 1-3/4-in x 72-in weld less elevator links, 150-



**Saskatchewan
Personal Property Registry
Search Result**

General Property

ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing splder w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ clevis. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

Doghouse Building & Contents - 2001 mobile doghouse trailer 2C9HB460812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

Rig 6 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n1CYEGW6879T049305. Tandem steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in toolboxes, fuel tanks, wing walk and adjustable working platform.C/w Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast s/n 09.08.015, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2- in standpipe & six sheave crown assembly.C/w Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40- in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. C/w Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine s/n 06R1006764 rated @ 665-hp @ 2300 rpm. C/w Transmission; Allison Model HT750 DR torque-tube drive automatic transmission.C/w Namco Model M94-RA45041 right angle drive box s/n N07-16002C/w Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline.C/w Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc

2000 Kenworth Model T800 truck s/n 1NK0LBEX9Y5959499 equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ approximately 17-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. c/w Engine; Cat Model 3406E diesel engine s/n 2WS31358 rated at 475-hp. c/w Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. c/w Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump c/w Tulsa Model 30BBX4L2F winch; 30,000-lb c/w Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. c/w Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses.



Saskatchewan
Personal Property Registry
Search Result

General Property

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 875792 w/ (3) 24-in sheaves grooved for 1-in line. Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. Set x 1-3/4-in x 72-in weld less elevator links s/n 150T072/71, 150-ton capacity. Canglobal Model Clipper weight indicator s/n 28528, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

B.O.P. Equipment - IEI (Control Tech) Model CS double-gate ram preventer s/n K08-092, 179-mm (7-1/16 in) X 35,000- kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. Two Hi-Kalibre safety valves, 73 & 73-mm. Lot of saver subs, 73 & 89-mm.

Tubing & Rod Handling Equipment - Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. Set Mission shallow hand slips w/ 60 to 89-mm dies. Set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. Set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. Two Rod elevators, 5/8-in to 1-in. Four Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554 578-600, 25-ton rod hook w/ devis s/n s/n H1208060. Regan 3-in 76-mm x 21,000-kPa rod BOP. 10-ton BOP elevator w/ pick-up slings. Lot of rod chaser, tubing drifts, rod transfers, etc. Lot of Pup joints, 60-mm & 73-mm.

Servicing & Swabbing Equipment - Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20- ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76 mm FP rod BOP, flow tee & 51-mm ball valve.

"Doghouse Building & Components - 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed Incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant s/n 49606; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 55-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet."

Auxiliary Truck - 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ approximately 18-mm of tread remaining, air - operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ airride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ approximately 27-mm of tread remaining, air - operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chucks etc. Cat Model C15 turbo-charged diesel engine s/n GNZ87182 rated @ 450-hp @ 2100 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

"Rig Support Equipment - Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc."



Saskatchewan
Personal Property Registry
Search Result

General Property

"The goods described herein, wherever situated, and all present and after-acquired intellectual property, intangibles, attachments, accessories and accessions thereto and spare parts, replacements, substitutions, exchanges and trade-ins therefor, and all rights, receivables and chattel paper derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto.

Proceeds: all of the Debtor's present and after-acquired personal property which is derived directly or indirectly from any dealing with or disposition of the above-described collateral, including, without limiting the generality of the foregoing, all insurance and other payments payable as indemnity or compensation for loss or damage thereto and all chattel paper, documents of title, goods, instruments, intangibles, money and securities

INTERNAL REFERENCE: ESA #8754190001 and #150011594277

One (1) 2006 Western Star 4900 Pump Truck s/n 5KJRALCV86PV36016
c/w Empire E-300 5x6 pump and deckage, serial number 2008-08-03
c/w 5 valve manifold 5000#, line pipe and Alberta spec 26m3 rig tank

Internal reference: ESA cross #8774698001.

2012 RYKAR MODEL SR500 FREESTANDING DOUBLE SERVICE RIG SERIAL NUMBER 2RCR545D4C16F8393 c/w ALL ATTACHMENTS INCLUDING:
NEW SERIES 60 DETROIT DIESEL ENGINE C/W THE FOLLOWING:
RADIATOR C/W AIR TO AIR
WATEROUS PANEL, OIL COOLER, FARR AIR CLEANER
POWER STEERING PUMP C/W ADAPTER GEAR
AIR COMPRESSOR, ALTERNATOR, STARTER
BENDIXFAN HUB AND FAN
AIR TO AIR PIPING AND HOSE KIT
TURBO FLANGE AND CLAMP
RIG SAVER, WILLIAMS CONTROL, COWL MUFFLER
ALLISON OFS 4700 ELECTRONIC TRANSMISSION C/W FILTERS AND NANCO DROP BOX
ENGINE AND TRANSMISSION MOUNTED ON MASTER SKID
NEW 5 AXLE CARRIER, ALL HYDRAULICS AND WIRING
RYKAR DRAWWORKS, 42X10 MAIN DRUM, 38X8 SANDLINE DRUM, 1' LEBUS GROOVING ON MAIN DRUM
KOBELT DISC BRAKE C/W CALIPER
20000# TANDEM FRONT AXLES C/W ABS BRAKES, REYCO SUSPENSION
44000# ROCKWELL REAR AXLES, TRI-DRIVE, C/W NEWAY AIR RIDE
SINGLE MAN CAB C/W AIR RIDE SEAT, HEATER, FAN, ALL GAUGES
WABCO AIR SYSTEM
852 CHELSEA PTO, C/W TANDEM HYDRAULIC PUMP
2 STATION ACCUMULATOR SYSTEM S/W NITROGEN BACK UP SYSTEM
125 GAL. ALUMINUM FUEL TANK
COMPLETE 12 VOLT ELECTRICAL SYSTEM C/W LOCK OUT SWITCHES
2 - 8000# RATED WINCHES
ALL DRIVING LIGHTS, MIRRORS, MUD FLAPS, ETC.
4 NEW 445/65R22.5 RADIAL TIRES C/W 4 ALUMINUM RIMS, 12 NEW 12/R22.5 RADIAL TIRES C/W 12 ALUMINUM RIMS
TOOL BOXES
MAST WIRING C/W INCANDESCENT LIGHTS
MANUAL OUTRIGGERS (QT100 PLATE)
6 FT. RIG FLOOR C/W FOLD OUT WINGS, C/W ALL HANDRAILS
HYDRAULIC TANK, MINIMUM CAPACITY 250 GALS
ALL WALKWAY'S PULLOUT ON ROLLERS
MCKISSICK DIVIDING BLOCK AND HOOK ASSEMBLY - 100 TON
1200' 1" DRILL LINE
SET OF TUBING ELEVATORS; 2 7/8" EUE BVM TA100 TON AND 2 3/8" EUE BVM TA100 TON
SET OF KING ELEVATOR LINKS - 72" X 1 1/2"
ALL STAIRS COMING OFF CARRIER - ALUMINIM C/W HANDRAILS
FOLD UP BASE BEAM
GUYLINES FROM MONKEY BOARD TO OUTRIGGERS
CROWN LINES TO CARRIER
SANDBLAST AND PAINT CUSTOMER COLORS (NOTE: 2 COLORS)
CVIP CERTIFICATION NSM CERTIFICATION
NSM CERTIFICATION
COMPLETE MANUAL WITH ALL PART NUMBERS, ETC.

Internal reference: ESA cross #8775251001.



**Saskatchewan
Personal Property Registry
Search Result**



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 05-Dec-2012 09:42:42

Registration #: 300959842
Expiry Date: 01-Dec-2018

Event Type: Amendment
Transaction Reason: Regular

Transaction Description: to amend the registration to reflect the change in lease number

Notations

Trust Indenture: No

Registrant

| | |
|--|------------------------------------|
| Party ID: 150000157 - 3 | Address: 1525 BUFFALO PLACE |
| Entity Type: Business | WINNIPEG, Manitoba |
| Name: NATIONAL LEASING GROUP INC. | R3T1L9 Canada |

Secured Party

| | |
|--|------------------------------------|
| Item #: 1 | Address: 1525 BUFFALO PLACE |
| Party ID: 150000157 - 3 | WINNIPEG, Manitoba |
| Entity Type: Business | R3T1L9 |
| Name: NATIONAL LEASING GROUP INC. | Canada |

Debtor Party

| | |
|---|-----------------------------------|
| * Item #: 1 | Address: 77 GALLOWAY DRIVE |
| Party ID: 151720674 - 1 | OXBOW, Saskatchewan |
| Entity Type: Business | S0C2B0 |
| Name: MUSTANG WELL SERVICES LTD. | Canada |
| * Item #: 2 | Address: PO BOX 1467, GD, |
| Party ID: 151720674 - 2 | CAMROSE, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: MUSTANG WELL SERVICES LTD. | Canada |
| Item #: 3 | Address: PO BOX 1467, GD, |
| Party ID: 152467817 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: BARDOVUE RENTALS LIMITED | Canada |
| Item #: 4 | Address: PO BOX 1467, GD, |
| Party ID: 152467818 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: REACTION OILFIELD SUPPLY LTD. | Canada |
| Item #: 5 | Address: PO BOX 1467, GD, |
| Party ID: 152467819 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: INTEGRA LABORATORY SERVICES LTD. | Canada |

General Property

LEASE NUMBER CHANGED FROM 2605702 TO 2743475.

History - Setup

Registration Type: Personal Property Security Agreement
Registration Date: 05-Dec-2012 09:42:42

Registration #: 300959842
Transaction #: 1
Expiry Date: 01-Dec-2018

Event Type: Setup
Transaction Reason: Regular



**Saskatchewan
Personal Property Registry
Search Result**

Notations

Trust Indenture: No

Registrant

| | |
|--|------------------------------------|
| Party ID: 150000157 - 3 | Address: 1525 BUFFALO PLACE |
| Entity Type: Business | WINNIPEG, Manitoba |
| Name: NATIONAL LEASING GROUP INC. | R3T1L9 Canada |

Secured Party

| | |
|--|------------------------------------|
| Item #: 1 | Address: 1525 BUFFALO PLACE |
| Party ID: 150000157 - 3 | WINNIPEG, Manitoba |
| Entity Type: Business | R3T1L9 |
| Name: NATIONAL LEASING GROUP INC. | Canada |

Debtor Party

| | |
|---|-----------------------------------|
| Item #: 1 | Address: 77 GALLOWAY DRIVE |
| Party ID: 151720674 - 1 | OXBOW, Saskatchewan |
| Entity Type: Business | S0C2B0 |
| Name: MUSTANG WELL SERVICES LTD. | Canada |

General Property

ALL SHELVING/RACKING, CONNECTORS, SUPPORTS, OSB, JACKS, PULLERS, BINS, POSTS, FRAMES, BEAMS, ANCHORS, MOUNTS OF EVERY NATURE OR KIND DESCRIBED IN LEASE NUMBER 2605702 BETWEEN THE SECURED PARTY, AS LESSOR AND THE DEBTOR AS LESSEE, AS AMENDED FROM TIME TO TIME, TOGETHER WITH ALL ATTACHMENTS, ACCESSORIES AND SUBSTITUTIONS.

History - Amendment

Amendment Date: 16-Dec-2015 14:43:34

Registration #: 300959842
Transaction #: 2

Event Type: Amendment
Transaction Reason: Regular

Transaction Description: to amend the registration to reflect the change in lease number

Registrant

| | |
|--|------------------------------------|
| Party ID: 150000157 - 3 | Address: 1525 BUFFALO PLACE |
| Entity Type: Business | WINNIPEG, Manitoba |
| Name: NATIONAL LEASING GROUP INC. | R3T1L9 Canada |

Debtor Party

| | |
|---|----------------------------------|
| Action: Add | Address: PO BOX 1467, GD, |
| Item #: 2 | CAMROSE, Alberta |
| Party ID: 151720674 - 2 | T4V1X4 |
| Entity Type: Business | Canada |
| Name: MUSTANG WELL SERVICES LTD. | |

| | |
|---------------------------------------|----------------------------------|
| Action: Add | Address: PO BOX 1467, GD, |
| Item #: 3 | CAMROSE, Alberta |
| Party ID: 152467817 - 1 | T4V1X4 |
| Entity Type: Business | Canada |
| Name: BARDOVUE RENTALS LIMITED | |

| | |
|--|----------------------------------|
| Action: Add | Address: PO BOX 1467, GD, |
| Item #: 4 | CAMROSE, Alberta |
| Party ID: 152467818 - 1 | T4V1X4 |
| Entity Type: Business | Canada |
| Name: REACTION OILFIELD SUPPLY LTD. | |

| | |
|--------------------|----------------------------------|
| Action: Add | Address: PO BOX 1467, GD, |
| Item #: 5 | CAMROSE, Alberta |



**Saskatchewan
Personal Property Registry
Search Result**

Debtor Party

| | | |
|---------------------|----------------------------------|--------|
| Party ID: | 152467819 - 1 | T4V1X4 |
| Entity Type: | Business | Canada |
| Name: | INTEGRA LABORATORY SERVICES LTD. | |

General Property

LEASE NUMBER CHANGED FROM 2605702 TO 2743475.



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 22-Mar-2013 10:48:39

Registration #: 300999895
Expiry Date: 22-Mar-2023

Event Type: Amendment
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 Canada |

Secured Party

| | |
|---|---|
| Item #: 1 | Address: 3300, 525 - 8 Avenue SW |
| Party ID: 151712159 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE Canada Equipment Financing G.P. | Canada |

Debtor Party

| | |
|---|---|
| Item #: 1 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785197 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: MRBD Ltd. | Canada |
| * Item #: 2 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785198 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: Mustang Well Services Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVSJT8DJ146041 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 2 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXTAPT26J225893 | Model: 5900I |
| Override: No | Color: |
| Item #: 3 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT67J407021 | Model: 5618 |
| Override: No | Color: |
| Item #: 4 | Year: 2011 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVAPT2BJ196710 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 5 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTNWSMT3DJ603273 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 6 | Year: 1996 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 2WLNCCFF0TK941183 | Model: tridrive |
| Override: No | Color: |
| Item #: 7 | Year: 2005 |



Saskatchewan Personal Property Registry Search Result

Serial Property

| | |
|------------------------------------|--|
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 5KKPALCK45PU76629 | Model: |
| Override: No | Color: |
| Item #: 8 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT35J055979 | Model: 5600 |
| Override: No | Color: |
| Item #: 9 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT5DJ304393 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 10 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZTLCJ603037 | Model: 75006X4 |
| Override: Yes | Color: |
| Item #: 11 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR87H407626 | Model: 44006X4 |
| Override: No | Color: |
| Item #: 12 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT9CJ078969 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 13 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR56H311306 | Model: 4400SBA4X2 |
| Override: No | Color: |
| Item #: 14 | Year: 2002 |
| Serial Type: Trailer | Make/Desc.: Fabtec mobile dog house |
| Serial #: 4220491208 | Model: |
| Override: No | Color: |

General Property

IR1:
 2013 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive; Wireline s/n 20856
 2012 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
 CSS DAS 2000 data acquisition system with rack mount chassis and printrex printer.
 Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
 Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast s/n 24030
 Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/8 in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/4 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
 Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/4 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.
 Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 3-speed hydraulic motor.
 E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2013 International Paystar Model 5918x6 tri-drive truck vln-1HTXVSJT8DJ146041



**Saskatchewan
Personal Property Registry
Search Result**

General Property

Powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flatee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7/8-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR2:

2005 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive.

Wireline s/n 21270 s/n Gen - X07K433250

2005 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast s/n 21270

Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line DW motor s/n 054381889

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope DW motor s/n 054081345

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2- speed planetary gear box unitized with Sauer 2- speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7/8-in E-line c/w encoders & V-Roller

guide assembly (side-to-side movement), load cell & electronic depth counter.

2006 International Paystar Model 5900I 8x6 tri-drive truck s/n 1HTXTAPT26J225893
Powered by Cummins Model ISX 450 diesel engine rated at 450-hp @ 2,000-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flatee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR3:

2007 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive

2007 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage



Saskatchewan Personal Property Registry Search Result

General Property

cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021

Powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR4:

2011 DynaWinch Log & Swab Unit w/ 62-ft HD Mast and Tandem Drums, Mounted on International Tri-drive, Wireline s/n 23844

2011 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Dynawinch Model CD2-3-260HD telescoping mast s/n 23844

62-ft 6-in overall working height rated for 33,500-lbs w/ 3/8 in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 3/8 in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2011 International Paystar Model 5918x6 Tri-axle truck s/n 1HTXVAPT2BJ196710



Saskatchewan Personal Property Registry Search Result

General Property

Powered by Cummins Model ISX 600 diesel engine rated at 600-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to tandem 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR1 PT:

2013 International Pump Truck w/ Jolly Pump & Tank:

2013 International Paystar Model 5918x6 tri-drive truck s/n 1HTNWSMT3DJ603273 powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Jolly Engineering Services Model JES-300 mud pump s/n 1201

5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. pick-up slings. Lot of rod chaser, tubing drifts, rod transfers. Lot of Pup joints, 60-mm & 73-mm.

(1) 28-m (cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR2 PT:

1996 Western Star Pump Truck w/ Empire pump & Tank:

1996 Western Star Model tri-drive truck s/n 2WLNCCFF0TK941183

Powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR3 PT:

2005 Western Star Pump Truck w/ Empire Pump & Tank:

2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629

powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank deck; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc



Saskatchewan
Personal Property Registry
Search Result

General Property

etc ...

Empire Model E-300 mud pump s/n LT01-2008-009
4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve,
5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console.
Pump is energized by drop box via truck PTO.
(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting,
(20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft
kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft
6-in wide 20-ft long

IR4 PT:

2005 International Pump Truck w/ Gardner Denver Pump w/ Tank:
2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979
powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton
Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power
steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires
with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000
lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels
and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and
Motorola 2 way radio, tire chains, chocks etc...
Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w
live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick
saws etc ...
Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco
pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge
pump & control console. Pump is energized by drop box via truck PTO.
(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting,
(20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft
kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft
6-in wide 20-ft long.

ET 01:

2013 International Truck w/ Dynawinch BOP Support Deck:
2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393
Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm
unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped
with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and
air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension
mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional
cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long s/n 24058
w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk
baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block
assembly s/n 06-349-24
w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs
s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal
Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins
depthometer for 14.28-mm sandline.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir,
nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips,
tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA
(Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2 -in dies, lot of rod tools including; rod
hook, elevators, wrenches, etc.

ET 02:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Paystar Model 75006X4 tandem-axle truck s/n 1HTWNAZTLCJ603037
Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm
unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped
with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and
air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension
mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional
cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w
Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom
locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir,
nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips,
tubing elevators (2 3/8 -in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA



Saskatchewan
Personal Property Registry
Search Result

General Property

(Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc..

ET 03:

2007 International Truck w/ Dynawinch BOP Support Deck:
2007 International Paystar Model 44006X4 single-axle truck s/n 1HTMKAAR87H407626
Powered by International Model DT466 diesel engine rated at 285-hp unitized with Eaton Fuller Model FR9210 10-speed manual transmission. Truck is equipped with; 12,000-lb front axles mounted on 11R22.5 tires with polished aluminum wheels and air-operated brakes. Rear axle rated at 23,000-lbs equipped with air-ride suspension mounted on 11R22.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc... Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

ET 04:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Model 7500SBA6X4 tandem-axle truck s/n 1HTWNAZT9CJ078969
powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison automatic transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

IR CT - 2006 International Cement Truck:

2006 International Model 4400SBA4X2 single-axle truck s/n 1HTMKAAR56H311306
Powered by Cummins Model D285 diesel engine rated at 285-hp @ 2,000-rpm unitized with Eaton manual 10-speed transmission. Truck is equipped with; 12,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 23,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch custom-built cement package; (1) mixing compartment hydraulic powered agitator c/w mission hydraulically powered fluid pump & interconnecting plumbing. (1) Staging compartment w/ mission hydraulically powered fluid pump & interconnecting plumbing. (1) deck-mounted mixing hoper c/w valving, operator's control console, steel-constructed deck, locking storage compartments, folding steel stairwell, safety railing and lighting.

IR1 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR2 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR3 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at



**Saskatchewan
Personal Property Registry
Search Result**

General Property

10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR4 DH: 2002 Fabtec mobile dog house s/n 4220491208
Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset w/ 3,888-hrs, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

Casing Jack: 2009 Ardy Rigging Model 5036DASJCC casing jack s/n 08095036

Internal reference: ELSA and ESA CC #8772229001.

The goods described herein, wherever situated, and all Present and after-acquired intellectual property, intangibles, Attachments, accessories and accessions thereto and spare Parts, replacements, substitutions, exchanges and trade-ins Therefor, and all rights, receivables and chattel paper Derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto. Proceeds: all of the debtors present and after-acquired Personal property which is derived directly or indirectly From any dealing with or disposition of the above-described Collateral, including, without limiting the generality of the Foregoing, all insurance and other payments payable as Indemnity or compensation for loss or damage thereto and All chattel paper, documents of title, goods, instruments, Intangibles, money and securities.

History - Setup

Registration Type: Personal Property Security Agreement
Registration Date: 22-Mar-2013 10:48:39

Registration #: 300999895
Transaction #: 1
Expiry Date: 22-Mar-2023

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 |
| | Canada |

Secured Party

| | |
|---|---|
| Item #: 1 | Address: 3300, 525 - 8 Avenue SW |
| Party ID: 151712159 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE Canada Equipment Financing G.P. | Canada |

Debtor Party

| | |
|---|---|
| Item #: 1 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785197 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: MRBD Ltd. | Canada |
| Item #: 2 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785198 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: Mustang Well Services Ltd. | Canada |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVSJT8DJ146041 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 2 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXTAPT26J225893 | Model: 5900I |
| Override: No | Color: |
| Item #: 3 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT67J407021 | Model: 5618 |
| Override: No | Color: |
| Item #: 4 | Year: 2011 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVAPT2BJ196710 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 5 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTNWSMT3DJ603273 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 6 | Year: 1996 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 2WLNCCFF0TK941183 | Model: tridrive |
| Override: No | Color: |
| Item #: 7 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 5KKPALCK45PU76629 | Model: |
| Override: No | Color: |
| Item #: 8 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT35J055979 | Model: 5600 |
| Override: No | Color: |
| Item #: 9 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT5DJ304393 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 10 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZTLCJ603037 | Model: 75006X4 |
| Override: Yes | Color: |
| Item #: 11 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR87H407626 | Model: 44006X4 |
| Override: No | Color: |
| Item #: 12 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT9CJ078969 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 13 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR56H311306 | Model: 4400SBA4X2 |
| Override: No | Color: |
| Item #: 14 | Year: 2002 |
| Serial Type: Trailer | Make/Desc.: Fabtec mobile dog house |
| Serial #: 4220491208 | Model: |
| Override: No | Color: |

General Property



Saskatchewan Personal Property Registry Search Result

General Property

IR1:

2013 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive: Wireline s/n 20856
2012 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printrex printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7/8-in diameter line for swabbing. Mast s/n 24030
Mast is equipped w/ (1) 16-in sheave grooved for 7/8-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/8 in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/4 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/4 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.
Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 3-speed hydraulic motor.
E-line measuring head assembly; measuring head grooved for 7/8-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2013 International Paystar Model 5918x6 tri-drive truck vin-1HTXVSJT8DJ146041
Powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc..
Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7/8-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR2:

2005 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive.
Wireline s/n 21270 s/n Gen - X07K433250
2005 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast s/n 21270
Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line DW motor s/n 054381889
Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.
Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope DW



Saskatchewan
Personal Property Registry
Search Result

General Property

motor s/n 054081345

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2- speed planetary gear box unitized with Sauer 2- speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7/8-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2006 International Paystar Model 59001 8x6 tri-drive truck s/n 1HTXTAPT26J225893

Powered by Cummins Model ISX 450 diesel engine rated at 450-hp @ 2,000-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR3:

2007 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive

2007 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7/8-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7/8-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021

Powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR4:



Saskatchewan
Personal Property Registry
Search Result

General Property

2011 DynaWinch Log & Swab Unit w/ 62-ft HD Mast and Tandem Drums, Mounted on International Tri-drive, Wireline s/n 23844

2011 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Dynawinch Model CD2-3-260HD telescoping mast s/n 23844

62-ft 6-in overall working height rated for 33,500-lbs w/ 3/8 in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 3/8 in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2011 International Paystar Model 5918x6 Tri-axle truck s/n 1HTXVAPT2BJ196710

Powered by Cummins Model ISX 600 diesel engine rated at 600-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to tandem 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc..

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR1 PT:

2013 International Pump Truck w/ Jolly Pump & Tank:

2013 International Paystar Model 5918x6 tri-drive truck s/n 1HTNWSMT3DJ603273 powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc..

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pullrating & junk basket with elbows, chick sans etc ...

Jolly Engineering Services Model JES-300 mud pump s/n 1201

5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. pick-up slings. Lot of rod chaser, tubing drifts, rod transfers. Lot of Pup joints, 60-mm & 73-mm.

(1) 28-m (cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR2 PT:

1996 Western Star Pump Truck w/ Empire pump & Tank:

1996 Western Star Model tridrive truck s/n 2WLNCCFF0TK941183



Saskatchewan
Personal Property Registry
Search Result

General Property

Powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR3 PT:

2005 Western Star Pump Truck w/ Empire Pump & Tank:

2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629

powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank deck; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump s/n LT01-2008-009

4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR4 PT:

2005 International Pump Truck w/ Gardner Denver Pump w/ Tank:

2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979

powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

ET 01:

2013 International Truck w/ Dynawinch BOP Support Deck:

2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393

Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long s/n 24058 w/ BOP stump c/w Warn positioning winch, tubular wall racks, chock-san hangers, caged junk



Saskatchewan Personal Property Registry Search Result

General Property

baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24
w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2 -in dies, lot of rod tools including; rod hook, elevators, wrenches, etc.

ET 02:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Paystar Model 75006X4 tandem-axle truck s/n 1HTWNAZTLCJ603037
Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 -in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc..

ET 03:

2007 International Truck w/ Dynawinch BOP Support Deck:
2007 International Paystar Model 44006X4 single-axle truck s/n 1HTMKAAR87H407626
Powered by International Model DT466 diesel engine rated at 285-hp unitized with Eaton Fuller Model FR9210 10-speed manual transmission. Truck is equipped with; 12,000-lb front axles mounted on 11R22.5 tires with polished aluminum wheels and air-operated brakes. Rear axle rated at 23,000-lbs equipped with air-ride suspension mounted on 11R22.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

ET 04:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Model 7500SBA6X4 tandem-axle truck s/n 1HTWNAZT9CJ078969
powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison automatic transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

IR CT - 2006 International Cement Truck:



**Saskatchewan
Personal Property Registry
Search Result**

General Property

2006 International Model 4400SBA4X2 single-axle truck s/n 1HTMKAAR56H311306
 Powered by Cummins Model D285 diesel engine rated at 285-hp @ 2,000-rpm unitized with Eaton manual 10-speed transmission. Truck is equipped with; 12,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 23,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
 Dynawinch custom-built cement package; (1) mixing compartment hydraulic powered agitator c/w mission hydraulically powered fluid pump & interconnecting plumbing. (1) Staging compartment w/ mission hydraulically powered fluid pump & interconnecting plumbing. (1) deck-mounted mixing hopper c/w valving, operator's control console, steel-constructed deck, locking storage compartments, folding steel stairwell, safety railing and lighting.

IR1 DH: Fabtec mobile dog house
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR2 DH: Fabtec mobile dog house
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR3 DH: Fabtec mobile dog house
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR4 DH: 2002 Fabtec mobile dog house s/n 4220491208
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset w/ 3,888-hrs, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

Casing Jack: 2009 Ardy Rigging Model 5036DASJCC casing jack s/n 08095036

Internal reference: ELSA and ESA CC #8772229001.

History - Amendment

**Registration #: 300999895
Transaction #: 2**

Amendment Date: 28-Mar-2013 10:59:34

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 |
| | Canada |



Saskatchewan Personal Property Registry Search Result

General Property

IR1:

2013 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive: Wireline s/n 20856
2012 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printrex printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast s/n 24030
Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/8 in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/4 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/4 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.
Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 3-speed hydraulic motor.
E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2013 International Paystar Model 5918x6 tri-drive truck vin-1HTXVSJT8DJ146041
Powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Lot of support equipment including; McKissick 35-ton travelling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump ballers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR2:

2005 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive.
Wireline s/n 21270 s/n Gen - X07K433250
2005 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast s/n 21270
Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line DW motor s/n 054381889
Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.



Saskatchewan
Personal Property Registry
Search Result

General Property

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope DW motor s/n 054081345

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7/8-in E-line c/w encoders & V-Roller

guide assembly (side-to-side movement), load cell & electronic depth counter.

2006 International Paystar Model 5900I 8x6 tri-drive truck s/n 1HTXTAPT26J225893

Powered by Cummins Model ISX 450 diesel engine rated at 450-hp @ 2,000-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR3:

2007 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive

2007 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-kW hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7/8-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope.

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7/8-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021

Powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air-operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.



Saskatchewan
Personal Property Registry
Search Result

General Property

IR4:

2011 DynaWinch Log & Swab Unit w/ 62-ft HD Mast and Tandem Drums, Mounted on International Tri-drive, Wireline s/n 23844

2011 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Dynawinch Model CD2-3-260HD telescoping mast s/n 23844

62-ft 6-in overall working height rated for 33,500-lbs w/ 3/8 in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 3/8 in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2011 International Paystar Model 5918x6 Tri-axle truck s/n 1HTXVAPT2BJ196710

Powered by Cummins Model ISX 600 diesel engine rated at 600-hp @ 1,700-rpm unitized with Eaton Model RTL016918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to tandem 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR1 PT:

2013 International Pump Truck w/ Jolly Pump & Tank:

2013 International Paystar Model 5918x6 tri-drive truck s/n 1HTNWSMT3DJ603273

powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTL016918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pullrating & junk basket with elbows, chocks etc ...

Jolly Engineering Services Model JES-300 mud pump s/n 1201

5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. pick-up slings. Lot of rod chaser, tubing drifts, rod transfers. Lot of Pup joints, 60-mm & 73-mm.

(1) 28-m (cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR2 PT:

1996 Western Star Pump Truck w/ Empire pump & Tank:



Saskatchewan
Personal Property Registry
Search Result

General Property

1996 Western Star Model tri-drive truck s/n 2WLNCCFF0TK941183

Powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.
(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR3 PT:

2005 Western Star Pump Truck w/ Empire Pump & Tank:

2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629

powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank deck; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump s/n LT01-2008-009

4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR4 PT:

2005 International Pump Truck w/ Gardner Denver Pump w/ Tank:

2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979

powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

ET 01:

2013 International Truck w/ Dynawinch BOP Support Deck:

2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393

Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long s/n 24058



Saskatchewan
Personal Property Registry
Search Result

General Property

w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24
w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2 -in dies, lot of rod tools including; rod hook, elevators, wrenches, etc.

ET 02:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Paystar Model 75006X4 tandem-axle truck s/n 1HTWNAZTLCJ603037 Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 -in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc..

ET 03:

2007 International Truck w/ Dynawinch BOP Support Deck:
2007 International Paystar Model 44006X4 single-axle truck s/n 1HTMKAAR87H407626 Powered by International Model DT466 diesel engine rated at 285-hp unitized with Eaton Fuller Model FR9210 10-speed manual transmission. Truck is equipped with; 12,000-lb front axles mounted on 11R22.5 tires with polished aluminum wheels and air-operated brakes. Rear axle rated at 23,000-lbs equipped with air-ride suspension mounted on 11R22.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

ET 04:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Model 7500SBA6X4 tandem-axle truck s/n 1HTWNAZT9CJ078969 powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison automatic transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...



Saskatchewan
Personal Property Registry
Search Result

General Property

IR CT - 2006 International Cement Truck:

2006 International Model 4400SBA4X2 single-axle truck s/n 1HTMKAAR56H311306
Powered by Cummins Model D285 diesel engine rated at 285-hp @ 2,000-rpm unitized with Eaton manual 10-speed transmission. Truck is equipped with; 12,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 23,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch custom-built cement package; (1) mixing compartment hydraulic powered agitator c/w mission hydraulically powered fluid pump & interconnecting plumbing. (1) Staging compartment w/ mission hydraulically powered fluid pump & interconnecting plumbing. (1) deck-mounted mixing hoper c/w valving, operator's control console, steel-constructed deck, locking storage compartments, folding steel stairwell, safety railing and lighting.

IR1 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR2 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR3 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.


IR4 DH: 2002 Fabtec mobile dog house s/n 4220491208

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset w/ 3,888-hrs, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

Casing Jack: 2009 Ardy Rigging Model 5036DASJCC casing jack s/n 08095036

Internal reference: ELSA and ESA CC #8772229001.

The goods described herein, wherever situated, and all Present and after-acquired intellectual property, intangibles, Attachments, accessories and accessions thereto and spare Parts, replacements, substitutions, exchanges and trade-ins Therefor, and all rights, receivables and chattel paper Derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto. Proceeds: all of the debtors present and after-acquired Personal property which is derived directly or indirectly From any dealing with or disposition of the above-described Collateral, including, without limiting the generality of the Foregoing, all insurance and other payments payable as Indemnity or compensation for loss or damage thereto and All chattel paper, documents of title, goods, instruments, Intangibles, money and securities.



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 05-Nov-2013 17:03:08

Registration #: 301107150
Expiry Date: 05-Nov-2023

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 Canada |

Secured Party

| | |
|---|---|
| Item #: 1 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959597 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | Canada |

| | |
|---|---|
| Item #: 2 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959598 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CANADA LEASING SERVICES COMPANY | Canada |

| | |
|---|---|
| Item #: 3 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959599 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GENERAL ELECTRIC CANADA EQUIPMENT FINANCE G.P. | Canada |

| | |
|--|---|
| Item #: 4 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959600 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CANADA ASSET FINANCING HOLDING COMPANY | Canada |

| | |
|------------------------------------|---|
| Item #: 5 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959601 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE TECHNOLOGY FINANCE | Canada |

| | |
|--|---|
| Item #: 6 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959602 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE VFS CANADA LIMITED PARTNERSHIP | Canada |

| | |
|--|---|
| Item #: 7 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959603 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CAPITAL CANADA EQUIPMENT FINANCING & LEASING COMPANY | Canada |

Debtor Party

| | |
|---|--|
| * Item #: 1 | Address: #1110 - 910 7TH AVENUE |
| Party ID: 151959606 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: MUSTANG WELL SERVICES LTD. | Canada |

General Property

ALL OF THE DEBTOR'S PRESENT AND AFTER-ACQUIRED PERSONAL PROPERTY.



**Saskatchewan
Personal Property Registry
Search Result**



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 03-Jul-2014 10:16:26

Registration #: 301208502
Expiry Date: 03-Jul-2024

Event Type: Amendment
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 Canada |

Secured Party

| | |
|--|--|
| Item #: 1 | Address: 600, 444 – 7 Avenue S.W. |
| Party ID: 151816583 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P0X8 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party

| | |
|---|----------------------------------|
| * Item #: 1 | Address: 46272 Highway 56 |
| Party ID: 152122503 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Mustang Well Services Ltd. | Canada |
| Item #: 2 | Address: 46272 Highway 56 |
| Party ID: 152122504 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: MRBD Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Rig Carrier low rider 5 axel |
| Serial #: 2E9RSZ5Z36R073004 | Model: |
| Override: No | Color: |
| Item #: 2 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Conventional Truck |
| Serial #: 1FVUF7WB1YPG53125 | Model: |
| Override: No | Color: |
| Item #: 3 | Year: 2009 |
| Serial Type: Trailer | Make/Desc.: Mobile doghouse trailer |
| Serial #: MWS200902 | Model: |
| Override: No | Color: |
| Item #: 4 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star FL941 |
| Serial #: 2WLPCD2G5YK960249 | Model: |
| Override: No | Color: |
| Item #: 5 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Rig Carrier low rider 5 axel |
| Serial #: 2E9RSZ5Z96R073007 | Model: |
| Override: Yes | Color: |
| Item #: 6 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star 4900SA Tri Drive Log Truck |
| Serial #: 5KKPALAV83PL79816 | Model: |
| Override: No | Color: |
| Item #: 7 | Year: 2010 |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|--|---|
| Serial Type: Trailer Serial #: MWS201002 Override: No | Make/Desc.: Mobile doghouse trailer Model: Color: |
| Item #: 8 Serial Type: Motor Vehicle Serial #: 2WKPDDJH4YK962165 Override: No | Year: 2000 Make/Desc.: Western Star 5964SX tandem axel truck Model: Color: |
| Item #: 9 Serial Type: Motor Vehicle Serial #: 1CYEGW6837T047676 Override: Yes | Year: 2007 Make/Desc.: Crane DR0106 5 axel carrier Model: Color: |
| Item #: 10 Serial Type: Motor Vehicle Serial #: 2WLPSDCJ3YK962739 Override: No | Year: 2000 Make/Desc.: Western Star 4986FX tridrive pump truck Model: Color: |
| Item #: 11 Serial Type: Trailer Serial #: 2M91DV3B7CC185001 Override: No | Year: 2012 Make/Desc.: Shop-built mobile doghouse trailer Model: Color: |
| Item #: 13 Serial Type: Motor Vehicle Serial #: 2R9R4CF128E690061 Override: No | Year: 2008 Make/Desc.: Iron tech SR242 5-axel carrier Model: Color: |
| Item #: 14 Serial Type: Motor Vehicle Serial #: 5KJRALCK45PN91874 Override: No | Year: 2005 Make/Desc.: Western Star 4964SA tri-drive truck Model: Color: |
| Item #: 15 Serial Type: Trailer Serial #: MWS004 Override: No | Year: 1998 Make/Desc.: Shop-bullt mobile doghouse trailer Model: Color: |
| Item #: 16 Serial Type: Trailer Serial #: 2WKPDDCJ8WK950999 Override: No | Year: 1988 Make/Desc.: Western Star 4964FX tandem-axel truck Model: Color: |
| Item #: 17 Serial Type: Motor Vehicle Serial #: 1CYEGW6879T049305 Override: No | Year: 2009 Make/Desc.: Crane DR20106 5-axel carrier Model: Color: |
| Item #: 18 Serial Type: Motor Vehicle Serial #: 1FUUF7WB1YPG53125 Override: Yes | Year: 2000 Make/Desc.: Freightliner T800 Truck Model: Color: |
| Item #: 19 Serial Type: Trailer Serial #: 2S9NL666491022197 Override: No | Year: 2009 Make/Desc.: Southland CHT22500-9535-84 doghouse trailer Model: Color: |
| Item #: 20 Serial Type: Motor Vehicle Serial #: 1FVPA6AV43PL05431 Override: No | Year: 2003 Make/Desc.: Freightliner Columbia tandem axel Model: Color: |
| Item #: 21 Serial Type: Motor Vehicle Serial #: 78244 Override: Yes | Year: 1978 Make/Desc.: Cardwell B140 4 axel carrier Model: Color: |
| Item #: 22 Serial Type: Motor Vehicle Serial #: 5KJRALCV86PV36016 Override: No | Year: 2006 Make/Desc.: Western Star Tri-drive Model: Color: |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

Item #: 23
Serial Type: Trailer
Serial #: 2C9HB46D812044028
Override: No

Year: 2001
Make/Desc.: Doghouse trailer
Model:
Color:

Item #: 24
Serial Type: Motor Vehicle
Serial #: 196087
Override: Yes

Year: 1980
Make/Desc.: Franks Type 300 free standing carrier
Model:
Color:

Item #: 25
Serial Type: Motor Vehicle
Serial #: 1FVPALAV83PL04474
Override: No

Year: 2003
Make/Desc.: Freightliner FLD120 truck
Model:
Color:

Item #: 26
Serial Type: Motor Vehicle
Serial #: 1HTXRAET11J086477
Override: No

Year: 2001
Make/Desc.: International 5900i 6x4 series tractor
Model:
Color:

Item #: 27
Serial Type: Trailer
Serial #: 2M91DV3B7CC185008
Override: No

Year: 2012
Make/Desc.: MWS mobile doghouse trailer
Model:
Color:

Item #: 28
Serial Type: Trailer
Serial #: 20856
Override: No

Year: 2013
Make/Desc.: DynaWinch CD3-323
Model:
Color:

Item #: 29
Serial Type: Motor Vehicle
Serial #: 1HTXVSJT8DJ146041
Override: No

Year: 2013
Make/Desc.: International Paystar 5918x6 tri drive truck
Model:
Color:

Item #: 30
Serial Type: Trailer
Serial #: 21270
Override: No

Year: 2005
Make/Desc.: DynaWinch CDC-323
Model:
Color:

Item #: 31
Serial Type: Motor Vehicle
Serial #: 1HTXTAPT26J225893
Override: No

Year: 2005
Make/Desc.: International Paystar 5900i tri axel truck
Model:
Color:

Item #: 32
Serial Type: Trailer
Serial #: 21681
Override: No

Year: 2007
Make/Desc.: DynaWinch recorder body
Model:
Color:

Item #: 33
Serial Type: Motor Vehicle
Serial #: 1HTXSAPT67J407021
Override: No

Year: 2007
Make/Desc.: International 5618 7x6 tri-axel truck
Model:
Color:

Item #: 34
Serial Type: Trailer
Serial #: 33844
Override: No

Year: 2012
Make/Desc.: DynaWinch recorder body
Model:
Color:

Item #: 35
Serial Type: Motor Vehicle
Serial #: 1HTXVAPT2BJ196710
Override: No

Year: 2011
Make/Desc.: International Paystar tri-drive truck
Model:
Color:

Item #: 36
Serial Type: Motor Vehicle
Serial #: 1HTNWSMT3DJ603273
Override: No

Year: 2013
Make/Desc.: International Paystar 5918x6 tridrive truck
Model:
Color:

Item #: 37
Serial Type: Motor Vehicle
Serial #: 2WLNCCFF0TK941183

Year: 1996
Make/Desc.: Western Star tri drive truck
Model:



Saskatchewan Personal Property Registry Search Result

Serial Property

Override: No

Color:

General Property

(1) Used 2006 Rig Carrier, low-rider, 5-axel self-propelled back-in carrier s/n 2E9RSZ5Z36R073004. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65/22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Attached with 1 Used 2006, SJ Petro, XJ250S Double-drum drawworks s/n 06R0886197 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, SJ Petro bankd 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @425-hp @ 32000 rpm. Transmission; Allison Model HT750-DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & ½-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear leveling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) Used 2000 Freightliner, Conventional truck equipped w/ Rock Well Model 941 s/n 1FVUF7WB1YPG53125 spring-ride front axel rate at 16,000-lb mounted on 385/65R22.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 19,000-lbs each, equipped w/ airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Truck is c/w fuel tanks & locking storage compartments. Engine; Cummins Model Signature 600 15-L diesel engine rated at 600-hp @ 2000-rpm s/n 14004589 w/ PAS turbo Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n 70333492-02. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700051. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses s/n 16980. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 06-353-54. (1) Set Foster Model 93R hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 05254-1, 2. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1237 Cavins depthometer for 14.28-m. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 21,000-kPa 5,000-psi wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 27-in (73) s/n 114043 & 114044. (1) Lot of saver subs, 27-in (73-mm) & 3½-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body s/n 2646. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n 74742-3. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators s/n 74200. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0406006. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator; (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubular rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2009 Shop-built mobile doghouse trailer s/n MWS200902; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n X06B070573. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & gloved incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricant slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet.

(1) USED 2000 Western Star. S/N 2WLPCD2G5YK960249, FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks. c/w 1 Used Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 300-hp @ 2100 s/n 9TL21455. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 2E9RSZ5Z96R073007. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission;



Saskatchewan Personal Property Registry Search Result

General Property

Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.

(1) USED 2003 Western Star Model 4900SA Tri Drive Log Truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; C-15 diesel engine rated at 500-hp s/n MBN05778. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83-A 24, 100-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n 059-1764. (1) Set Gill Model 500 - hydraulic power tubing tongs s/n 500-896. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity 06099-1, 2. Schwab's Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN 1551. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI Model Double double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve s/n 60986-01. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubingspider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0606136. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assem. w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2010 Shop-built mobile doghouse trailer s/n MWS201002; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear s/n M11C110969 Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star Model 4964SX tandem axel truck s/n 2WKPPDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 500-hp @ 177 rpm. > Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2007 Crane Model DR0106 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square tubing stiff mast, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly KE-5042. Drawworks; Cooper double-drum drawworks w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver s/n 1949. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm s/n 06R0949883. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off s/n M5610A. Namco Model right angle drive box. Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2000 Western Star Model 4986FX tridrive pump truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; Cat Model 3406E diesel engine rated at 550-hp; 14.6-litre s/n 2WS19060. Transmission; Eaton Model RTLO-20918B, 18 speed manual transmission. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-l s/n 32700063. > Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two compartments w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 06-349-24. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P.



Saskatchewan Personal Property Registry Search Result

General Property

Equipment; IEI double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ (2) 51-mm outlet valves s/n 48558-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) HI-Kalibre safety 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n MSM04681. (1) set AOT Type TA65, 65-ton 60-mm (2-3/8 in) tubing elevators s/n 63068. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators s/n 87752. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1017020. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600 /900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n 752XL03.1GTB. Incinolet Model WB electric toilet.

(1) USED Rig Carrier; 2008 Iron tech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ ABS braking system. Meritor single reduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Irontech Model 72-140S freestanding stiff mast 72-ft 21.9-m), 150,000-lbs (66,720- daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly s/n MO-45-07. Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks (splash-cooled & belt driven) c/w crown-saver & brakes s/n 9.KK.01.08. Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 665- hp @ 2300-rpm. Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. Rig-up right angle gear box s/n GP.54.08. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043.

(1) USED 2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK45PN91874. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Detroit Series 60, 14-litre turbo diesel drive engine, rated @ 500-hp @ 1800 rpm s/n 05R0801867. Transmission; Allison Model 4700 OFS 5-speed automatic transmission w/ power take-off. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-Lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ 176-bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses. Travelling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 1759866. (1) Set Tillery & Parks Type 5890-hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1240. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (API) double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 05-059. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) HI-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body (1) Set Mission shallow hand slips w/ 60 to 89-mm dies (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in (4) Rod wrenches, 5/8-in to 1-in 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

(1) USED 1988 Western Star s/n 2WKPDCCJ8WK950999 Model 4964FX tandem-axel truck w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R24.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model 3406 diesel engine rated @ 490-hp s/n 6TS16393. Transmission; Eaton Model RTLO- 18718B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye



Saskatchewan Personal Property Registry Search Result

General Property

wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, highangle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. (1) USED Rig Carrier; 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n 1CYEGW6879T049305. Tandemsteer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n 09.08.015. Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm. s/n 06R1006764. Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. Namco Model M94-RA45041 right angle drive box s/n N07-16002. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc.

(1) USED 2000 Freightliner s/n 1FUUF7WB1YPG53125 Model T800 truck equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Engine; ISX 530 diesel engine rated at 500- hp @ 2000-rpm s/n 79089324. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 875792. (1) Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 150T072/71. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN s/n 28528. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n K08-092. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ devis s/n H1208060. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guilberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over hydraulic operation, equipped with approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 55- kW generator c/w day tank, electric start & switchgear s/n 49606. Incinolet Model WB electric toilet.

(1) USED 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chocks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm s/n 6NZ87182. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1978 Cardwell Model B140 s/n 78244, 4- axle self-propelled back-in carrier. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n CE-4544. Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown. Engine; Detroit Series 60 14.0-L turbocharged



Saskatchewan Personal Property Registry Search Result

General Property

diesel drive engine rated @ 665-hp @ 2300 rpm s/n 04RE102775. Transmission; Allison Model CLT750 torque-tube drive automatic transmission s/n 2510014086. > Bevel right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. > Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2006 Western Star Tri Drive s/n 5KJRALCV86PV36016 w/ springride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ airride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowle charge pump, w/ 2-in pressure gauge & Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Travelling & Rig Floor Equipment; > McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. (1) Set Gill Type 500 hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight Indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. (2) HI-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 mobile doghouse trailer s/n 2C9HB46D812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinoleet Model WB electric toilet. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1980 Franks Type 300 s/n 196087 free standing 4-axle self-propelled back-in carrier. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on new 445/65-22.5 tires with approximately 15-mm of tread remaining complete with ABS braking system & Reyco suspension. Meritor tandem-drive Rockwell rear axels equipped with polished aluminum wheels mounted on 11R/24.5 tires with approximately 18-mm of tread remaining complete with ABS braking system. Singleman insulated cab w/ air-ride seat, fan, controls & gauges, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1980 Franks Model KR069 1405, 21-m (69-ft) square-tubing free standing stiff mast, 53,400-daN (120,000-lbs) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & 4 sheave crown assembly w/ (3) 20-in sheaves grooved for 3/4-in line & (1) 16-in sheave grooved for 1/2-in line. Rear stabilization shoe with leveling jacks and swing out stabilization arms s/n J12655. > Drawworks; Frank Model double-drum 42X10 drawworks. Main drum; 254-mm (10-in) x 1,066-mm (42-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, disc brake & crown saver. Engine; Detroit Series 50 8.5-litre turbocharged diesel drive engine rated at 315-hp @ approximately 2,100 rpm s/n 04R0023225. Transmission; Allison Model HT750 torque-tube drive automatic transmission. & Chelsea PTO drive. Right angle drive box. Drill & Sandline; 1-inch (25.4-mm) x 3,000-m drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 250-gal tank, hydraulic power unit complete with Girdel hydraulic services pump, thermal exchanger, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, power tong, deck winches, etc.

(1) USED 2003 Freightliner Model FLD120 truck s/n 1FVPAALAV83PL04474 equipped w/ Rock Well spring-ride front axel rated at 14,000-lbs mounted on polished aluminum wheels fitted with 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 55,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R24.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; (2) cylinder hydraulic live roll, driver's air-ride seat, tire chains, chalks. Engine; Cat Model C15 diesel engine rated at 450-hp @ approximately 2,100-rpm s/n 6NZ74661. Transmission; Eaton Fuller Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 6-in c/w forged fluid end, quick-change heads, 7-valve, 5,000-psi manifold, pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 30-m³ 188-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, steam coils, fill lines, man lift, external tank gauge, chiksans & mud. Condition Assessment; Mud system and tank is new (not truck). Drop box. Spark arrestors. Stretched frame Travelling & Rig Floor Equipment; McKissick Model Fig. 83A, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n W12163. (1) set Foster Type 593-R hydraulic power tubing tongs. (1) set Oil Country 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 38028391-04A/04B. Clipper Model weight indicator, 0-90,000- daN, calibrated to 62,000-dan s/n KCW00205. Cavins depthometer for 14.28-mm. B.O.P. Equipment; IEI (Control Tech) Model DBL double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n CT3465. Spool, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp w/ 51-mm outlet



Saskatchewan Personal Property Registry Search Result

General Property

valve s/n API33911. Accumulator; 22-gal class II rig mounted accumulator system. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 89-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set 2 ?-in Type CL Upset 100-ton tubing Elevators s/n 36737080-01. (1) set 2 ?-in Type CL Upset 100-ton tubing elevators s/n 34353023-04. Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0611007. > (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 International Model 5900i 6X4 Series s/n 1HTXRAET11J086477 tandem-axle tractor powered by Cummins Model N14460E1 turbo charged diesel engine rated at 450-hp @ 2,100 rpm. Engine is unitized with w/ Eaton Fuller 10 speed manual transmission & PTO. Tractor has single steer front axle mounted on 12R/22.5 tires w/ approximately 14-mm of tread remaining. Tractor has Tandem rear axles mounted on 11R24.5 tires w/ approximately 18-m of tread remaining. Truck also equipped w/ rear exterior lighting, rear hitch, drivers air ride seat, air ride suspension. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand with slider, tong rack, lubricator rack, etc. Condition Assessment; Truck frame stretched to accommodate deck and slider for BOP stand. Whole unit recently painted.

(1) USED 2012 MWS Model MWS s/n 2M91DV3B7CC185008 mobile doghouse trailer approximately 8-ft wide x 32-ft long. Trailer is equipped with spring-ride tandem 10,000-lbs axels mounted on dual wheels fitted with 225/70R22.5 tires. Change shack/ doghouse section; (8) lockers, knowledge box, fridge, desk, electric heater, storage benches, locking storage cabinets & fluorescent interior lighting. Light plant section; utility bench, vise, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinole electric toilet. Light Plant; Isuzu Model NEMA powered by Isuzu Model 4BG1T 4-cylinder diesel unitized with Stamford 42-kW generator c/w day tank, electric start & switchgear s/n A05D389308. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED 2013 DynaWinch Model CD3-323 s/n 20856 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting s/n 24030. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2- speed hydraulic motor. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2013 International Paystar Model 5918x6 tri drive truck s/n 1HTXVSJT8DJ146041; powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise.

(1) USED 2005 DynaWinch Model CDC-323 s/n 21270 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16- in sheave grooved for ?-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Last inspected April 13, 2010; mast s/n 21270. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by hydraulic motor s/n 054381889. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by hydraulic motor s/n 054081345. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth.



Saskatchewan
Personal Property Registry
Search Result

General Property

(1) USED 2005 International Paystar Model 59001 8x6 Tri-axle truck s/n 1HTXTAPT26J225893 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp (15,026-metered hours) unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with approximately 10-mm of tread & polished aluminum wheels with air - operated brakes.

Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2007 DynaWinch s/n 21681 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting; mast s/n 21681. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021; powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2012 DynaWinch s/n 33844 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 62-ft overall working height rated for 33,500-lb safe working load single line w/ guy lines, 67,000-lbs total mast static load. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility s/n 23844. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2011 International Model Paystar tandemsteer tri-drive truck s/n 1HTXVAPT2BJ196710 ; powered by Cummins Model ISX600 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2013 International Paystar Model 5918x6 tridrive truck s/n 1HTNWSMT3DJ603273 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Jolly Engineering Services Model JES-300 mud pump; 5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber,



**Saskatchewan
Personal Property Registry
Search Result**

General Property

Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 120. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.
 (1) USED 1996 Western Star Model tri drive truck s/n 2WLNCCFF0TK941183; powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Garder Denver Model TEE mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 precharge pump & control console. Pump is energized by drop box via truck PTO s/n 0010377. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.

History - Setup

Registration Type: Personal Property Security Agreement
Registration Date: 03-Jul-2014 10:16:26

Registration #: 301208502
Transaction #: 1
Expiry Date: 03-Jul-2024

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 |
| | Canada |

Secured Party

| | |
|--|--|
| Item #: 1 | Address: 600, 444 - 7 Avenue S.W. |
| Party ID: 151816583 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P0X8 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party

| | |
|---|----------------------------------|
| Item #: 1 | Address: 46272 Highway 56 |
| Party ID: 152122503 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Mustang Well Services Ltd. | Canada |
| Item #: 2 | Address: 46272 Highway 56 |
| Party ID: 152122504 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: MRBD Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Rig Carrier low rider 5 axel |
| Serial #: 2E9RSZ5Z36R073004 | Model: |
| Override: No | Color: |
| Item #: 2 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Conventional Truck |
| Serial #: 1FVUF7WB1YPG53125 | Model: |
| Override: No | Color: |
| Item #: 3 | Year: 2009 |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|--|---|
| Serial Type: Trailer Serial #: MWS200902 Override: No | Make/Desc.: Mobile doghouse trailer Model: Color: |
| Item #: 4 Serial Type: Motor Vehicle Serial #: 2WLPCD2G5YK960249 Override: No | Year: 2000 Make/Desc.: Western Star FL941 Model: Color: |
| Item #: 5 Serial Type: Motor Vehicle Serial #: 2E9RSZ5Z96R073007 Override: Yes | Year: 2006 Make/Desc.: Rig Carrier low rider 5 axel Model: Color: |
| Item #: 6 Serial Type: Motor Vehicle Serial #: 5KKPALAV83PL79816 Override: No | Year: 2003 Make/Desc.: Western Star 4900SA Tri Drive Log Truck Model: Color: |
| Item #: 7 Serial Type: Trailer Serial #: MWS201002 Override: No | Year: 2010 Make/Desc.: Mobile doghouse trailer Model: Color: |
| Item #: 8 Serial Type: Motor Vehicle Serial #: 2WKPPDDJH4YK962165 Override: No | Year: 2000 Make/Desc.: Western Star 5964SX tandem axel truck Model: Color: |
| Item #: 9 Serial Type: Motor Vehicle Serial #: 1CYEGW6837T047676 Override: Yes | Year: 2007 Make/Desc.: Crane DR0106 5 axel carrier Model: Color: |
| Item #: 10 Serial Type: Motor Vehicle Serial #: 2WLPSDCJ3YK962739 Override: No | Year: 2000 Make/Desc.: Western Star 4986FX tridrive pump truck Model: Color: |
| Item #: 11 Serial Type: Trailer Serial #: 2M91DV3B7CC185001 Override: No | Year: 2012 Make/Desc.: Shop-built mobile doghouse trailer Model: Color: |
| Item #: 12 Serial Type: Motor Vehicle Serial #: 1FUX3EDB3SP599554 Override: Yes | Year: Make/Desc.: Highway Tandem-axel truck Model: Color: |
| Item #: 13 Serial Type: Motor Vehicle Serial #: 2R9R4CF128E690061 Override: No | Year: 2008 Make/Desc.: Iron tech SR242 5-axel carrier Model: Color: |
| Item #: 14 Serial Type: Motor Vehicle Serial #: 5KJRALCK45PN91874 Override: No | Year: 2005 Make/Desc.: Western Star 4964SA tri-drive truck Model: Color: |
| Item #: 15 Serial Type: Trailer Serial #: MWS004 Override: No | Year: 1998 Make/Desc.: Shop-built mobile doghouse trailer Model: Color: |
| Item #: 16 Serial Type: Trailer Serial #: 2WKPDDCJ8WK950999 Override: No | Year: 1988 Make/Desc.: Western Star 4964FX tandem-axel truck Model: Color: |
| Item #: 17 Serial Type: Motor Vehicle Serial #: 1CYEGW6879T049305 Override: No | Year: 2009 Make/Desc.: Crane DR20106 5-axel carrier Model: Color: |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|--|--|
| Item #: 18 Serial Type: Motor Vehicle Serial #: 1FUUF7WB1YPG53125 Override: Yes | Year: 2000 Make/Desc.: Freightliner T800 Truck Model: Color: |
| Item #: 19 Serial Type: Trailer Serial #: 2S9NL666491022197 Override: No | Year: 2009 Make/Desc.: Southland CHT22500-9535-84 doghouse trailer Model: Color: |
| Item #: 20 Serial Type: Motor Vehicle Serial #: 1FVPA6AV43PL05431 Override: No | Year: 2003 Make/Desc.: Freightliner Columbia tandem axel Model: Color: |
| Item #: 21 Serial Type: Motor Vehicle Serial #: 78244 Override: Yes | Year: 1978 Make/Desc.: Cardwell B140 4 axel carrier Model: Color: |
| Item #: 22 Serial Type: Motor Vehicle Serial #: 5KJRALCV86PV36016 Override: No | Year: 2006 Make/Desc.: Western Star Tri-drive Model: Color: |
| Item #: 23 Serial Type: Trailer Serial #: 2C9HB46D812044028 Override: No | Year: 2001 Make/Desc.: Doghouse trailer Model: Color: |
| Item #: 24 Serial Type: Motor Vehicle Serial #: 196087 Override: Yes | Year: 1980 Make/Desc.: Franks Type 300 free standing carrier Model: Color: |
| Item #: 25 Serial Type: Motor Vehicle Serial #: 1FVPALAV83PL04474 Override: No | Year: 2003 Make/Desc.: Freightliner FLD120 truck Model: Color: |
| Item #: 26 Serial Type: Motor Vehicle Serial #: 1HTXRAET11J086477 Override: No | Year: 2001 Make/Desc.: International 5900i 6x4 series tractor Model: Color: |
| Item #: 27 Serial Type: Trailer Serial #: 2M91DV3B7CC185008 Override: No | Year: 2012 Make/Desc.: MWS mobile doghouse trailer Model: Color: |
| Item #: 28 Serial Type: Trailer Serial #: 20856 Override: No | Year: 2013 Make/Desc.: DynaWinch CD3-323 Model: Color: |
| Item #: 29 Serial Type: Motor Vehicle Serial #: 1HTXVSJT8DJ146041 Override: No | Year: 2013 Make/Desc.: International Paystar 5918x6 tri drive truck Model: Color: |
| Item #: 30 Serial Type: Trailer Serial #: 21270 Override: No | Year: 2005 Make/Desc.: DynaWinch CDC-323 Model: Color: |
| Item #: 31 Serial Type: Motor Vehicle Serial #: 1HTXTAPT26J225893 Override: No | Year: 2005 Make/Desc.: International Paystar 59001 tri axel truck Model: Color: |
| Item #: 32 Serial Type: Trailer Serial #: 21681 | Year: 2007 Make/Desc.: DynaWinch recorder body Model: |



Saskatchewan Personal Property Registry Search Result

Serial Property

| | | | |
|---------------------|-------------------|--------------------|---|
| Override: | No | Color: | |
| Item #: | 33 | Year: | 2007 |
| Serial Type: | Motor Vehicle | Make/Desc.: | International 5618 7x6 tri-axel truck |
| Serial #: | 1HTXSAPT67J407021 | Model: | |
| Override: | No | Color: | |
| Item #: | 34 | Year: | 2012 |
| Serial Type: | Trailer | Make/Desc.: | DynaWinch recorder body |
| Serial #: | 33844 | Model: | |
| Override: | No | Color: | |
| Item #: | 35 | Year: | 2011 |
| Serial Type: | Motor Vehicle | Make/Desc.: | International Paystar tri-drive truck |
| Serial #: | 1HTXVAPT2BJ196710 | Model: | |
| Override: | No | Color: | |
| Item #: | 36 | Year: | 2013 |
| Serial Type: | Motor Vehicle | Make/Desc.: | International Paystar 5918x6 tridrive truck |
| Serial #: | 1HTNWSMT3DJ603273 | Model: | |
| Override: | No | Color: | |
| Item #: | 37 | Year: | 1996 |
| Serial Type: | Motor Vehicle | Make/Desc.: | Western Star tri drive truck |
| Serial #: | 2WLNCCFFOTK941183 | Model: | |
| Override: | No | Color: | |

General Property

(1) Used 2006 Rig Carrier, low-rider, 5-axel self-propelled back-in carrier s/n 2E9RSZ5Z36R073004. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65/22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Attached with 1 Used 2006, SJ Petro, XJ250S Double-drum drawworks s/n 06R0886197 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, SJ Petro bankd 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-Omatic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @425-hp @ 32000 rpm. Transmission; Allison Model HT750-DRDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear leveling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) Used 2000 Freightliner, Conventional truck equipped w/ Rock Well Model 941 s/n 1FVUF7WB1YPG53125 spring-ride front axel rate at 16,000-lb mounted on 385/65R22.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 19,000-lbs each, equipped w/ airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Truck is c/w fuel tanks & locking storage compartments. Engine; Cummins Model Signature 600 15-L diesel engine rated at 600-hp @ 2000- rpm s/n 14004589 w/ PAS turbo Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission s/n 70333492-02. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700051. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses s/n 16980. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 06-353-54. (1) Set Foster Model 93R hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 05254-1, 2. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1237 Cavins depthometer for 14.28-m. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 21,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 27-in (73) s/n 114043 & 114044. (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body s/n 2646. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n 74742-3. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators s/n 74200. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0406006. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator; (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Shop-built mobile doghouse trailer s/n MWS200902; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog



Saskatchewan Personal Property Registry Search Result

General Property

house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n X06B070573. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricantsslings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star. S/N 2WLPCD2G5YK960249, FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks. c/w 1 Used Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 300-hp @ 2100 s/n 9TL21455. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 2E9RSZ5Z96R073007. Tandemsteer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.

(1) USED 2003 Western Star Model 4900SA Tri Drive Log Truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; C-15 diesel engine rated at 500-hp s/n MBN05778. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKlissick Fig 83-A 24, 100-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n 059-1764. (1) Set Gill Model 500 - hydraulic power tubing tongs s/n 500-896. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity 06099-1, 2. Schwab's Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN 1551. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI Model Double double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve s/n 60986-01. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubingspider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0606136. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assem. w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2010 Shop-built mobile doghouse trailer s/n MWS201002; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear s/n M11C110969 Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star Model 4964SX tandem axel truck s/n 2WKPDDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 500-hp @ 177 rpm. > Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2007 Crane Model DR0106 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel



Saskatchewan Personal Property Registry Search Result

General Property

tanks, wing walk and adjustable working platform. Mast; 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square tubing stiff mast, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly KE-5042. Drawworks; Cooper double-drum drawworks w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver s/n 1949. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm s/n 06R0949883. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off s/n M5610A. Namco Model right angle drive box. Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (14.28-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system. (1) USED 2000 Western Star Model 4986FX tri-drive pump truck s/n 2WLPSCDJ3YK962739. Western Model WS16 springride front axle rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; Cat Model 3406E diesel engine rated at 550-hp; 14.6-litre s/n 2WS19060. Transmission; Eaton Model RTLO-20918B, 18 speed manual transmission. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700063. > Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two compartments w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 06-349-24. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ (2) 51-mm outlet valves s/n 48558-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) HI-Kalibre safety 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n MSM04681. (1) set AOT Type TA65, 65-ton 60-mm (2-3/8 in) tubing elevators s/n 63068. (1) set AOT Type TA-100; 100-ton 73-mm (2-7/8 in) tubing elevators s/n 87752. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1017020. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transferers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600 /900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n 75ZXL03.1GTB. Incinoleet Model WB electric toilet. (1) USED Highway tandem-axle truck equipped w/ Rock Well Model 941 s/n 1FUX3EDB3SP599554 springride front axle mounted on 385/65R22.5 tires w/ approximately 8-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 350-hp @ 2100 rpm s/n 9CK15423. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. (1) USED Rig Carrier; 2008 Iron tech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axle equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ ABS braking system. Meritor single reduction tri-drive rear axels rated at 10,432-kg / axle mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Irontech Model 72-140S freestanding stiff mast 72-ft 21.9-m), 150,000-lbs (66,720- daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly s/n MO-45-07. Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks (splash-cooled & belt driven) c/w crown-saver & brakes s/n 9.KK.01.08. Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 665- hp @ 2300-rpm. Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. Rig-up right angle gear box s/n GP.54.08. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043. (1) USED 2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK45PN91874. Meritor Model FL941 spring-ride front axle rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/



Saskatchewan Personal Property Registry Search Result

General Property

11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chinks etc. Detroit Series 60, 14-litre turbo diesel drive engine, rated @ 500-hp @ 1800 rpm s/n 05R0801867. Transmission; Allison Model 4700 OFS 5-speed automatic transmission w/ power take-off. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-Lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ 176-bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 1759866. (1) Set Tillery & Parks Type 5890-hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1240. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (API) double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 05-059. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) HI-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body (1) Set Mission shallow hand slips w/ 60 to 89-mm dies (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in (4) Rod wrenches, 5/8-in to 1-in 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, silings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinoleet Model WB electric toilet.

(1) USED 1988 Western Star s/n 2WKPDCCJ8WK950999 Model 4964FX tandem-axel truck w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R24.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chinks etc. Cat Model 3406 diesel engine rated @ 490-hp s/n 6T516393. Transmission; Eaton Model RTLO- 18718B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, highangle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n 1CYEGW6879T049305. Tandemsteer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n 09.08.015. Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm. s/n 06R1006764. Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. Namco Model M94-RA45041 right angle drive box s/n N07-16002. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc.

(1) USED 2000 Freightliner s/n 1FUUF7WB1YPG53125 Model T800 truck equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chinks etc. Engine; ISX 530 diesel engine rated at 500- hp @ 2000-rpm s/n 79089324. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses: Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 875792. (1) Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 150T072/71. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN s/n 28528. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n K08-092. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) HI-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set



Saskatchewan Personal Property Registry Search Result

General Property

AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1208060. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & incinolet toilet. Class III accumulator; 3-station electric over hydraulic operation, equipped with approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 55- kW generator c/w day tank, electric start & switchgear s/n 49606. Incinolet Model WB electric toilet.

(1) USED 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ air -operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm s/n 6NZ87182. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1978 Cardwell Model B140 s/n 78244, 4- axle self-propelled back-in carrier. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 44S/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n CE-4544. Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n 04RE102775. Transmission; Allison Model CLT750 torque-tube drive automatic transmission s/n 2510014086. > Bevel right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. > Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2006 Western Star Tri Drive s/n 5KJRALCV86PV36016 w/ springride front axel mounted on polished aluminum wheels w/ 42S/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ airride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; > McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. (1) Set Gill Type 500 hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 mobile doghouse trailer s/n 2C9HB46D812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits,



Saskatchewan Personal Property Registry Search Result

General Property

safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1980 Franks Type 300 s/n 196087 free standing 4-axle self-propelled back-in carrier. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on new 445/65-22.5 tires with approximately 15-mm of tread remaining complete with ABS braking system & Reyco suspension. Meritor tandem-drive Rockwell rear axels equipped with polished aluminum wheels mounted on 11R/24.5 tires with approximately 18-mm of tread remaining complete with ABS braking system. Singleman insulated cab w/ air-ride seat, fan, controls & gauges, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1980 Franks Model KR069 1405, 21-m (69-ft) square-tubing free standing stiff mast, 53,400-daN (120,000-lbs) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & 4 sheave crown assembly w/ (3) 20-in sheaves grooved for 3/4-in line & (1) 16-in sheave grooved for 1/2-in line. Rear stabilization shoe with leveling jacks and swing out stabilization arms s/n 112655. > Drawworks; Frank Model double-drum 42X10 drawworks. Main drum; 254-mm (10-in) x 1,066-mm (42-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, disc brake & crown saver. Engine; Detroit Series 50 8.5-litre turbocharged diesel drive engine rated at 315-hp @ approximately 2,100 rpm s/n 04R0023225. Transmission; Allison Model HT750 torquetube drive automatic transmission. & Chelsea PTO drive. Right angle drive box. Drill & Sandline; 1-inch (25.4-mm) x 3,000-m drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 250-gal tank, hydraulic power unit complete with Girdel hydraulic services pump, thermal exchanger, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, power tong, deck winches, etc.

(1) USED2003 Freightliner Model FLD120 truck s/n 1FVPALAV83PL04474 equipped w/ Rock Well spring-ride front axel rated at 14,000-lbs mounted on polished aluminum wheels fitted with 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 55,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R24.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; (2) cylinder hydraulic live roll, driver's air-ride seat, tire chains, chalks. Engine; Cat Model C15 diesel engine rated at 450-hp @ approximately 2,100-rpm s/n 6NZ74661. Transmission; Eaton Fuller Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 6-in c/w forged fluid end, quick-change heads, 7-valve, 5,000-psi manifold, pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 30-m³ 188-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, steam coils, fill lines, man lift, external tank gauge, chiksans & mud. Condition Assessment; Mud system and tank is new (not truck). Drop box. Spark arrestors. Stretched frame Traveling & Rig Floor Equipment; McKissick Model Fig. 83A, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n W12163. (1) set Foster Type 593-R hydraulic power tubing tongs. (1) set Oil Country 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 38028391-04A/04B. Clipper Model weight indicator, 0-90,000- daN, calibrated to 62,000-dan s/n KCW00205. Cavins depthometer for 14.28-mm.B.O.P. Equipment; IEI (Control Tech) Model DBL double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n CT3465. Spool, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp w/ 51-mm outlet valve s/n API33911. Accumulator; 22-gal class II rig mounted accumulator system. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 89-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set 2 ?-in Type CL Upset 100-ton tubing Elevators s/n 36737080-01. (1) set 2 ?-in Type CL Upset 100-ton tubing elevators s/n 34353023-04. Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0611007. > (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 International Model 59001 6X4 Series s/n 1HTXRAET11J086477 tandem-axle tractor powered by Cummins Model N14460E1 turbo charged diesel engine rated at 450-hp @ 2,100 rpm. Engine is unitized with w/ Eaton Fuller 10 speed manual transmission & PTO. Tractor has single steer front axle mounted on 12R/22.5 tires w/ approximately 14-mm of tread remaining. Tractor has Tandem rear axels mounted on 11R24.5 tires w/ approximately 18-m of tread remaining. Truck also equipped w/ rear exterior lighting, rear hitch, drivers air ride seat, air ride suspension. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand with slider, tong rack, lubricator rack, etc. Condition Assessment; Truck frame stretched to accommodate deck and slider for BOP stand. Whole unit recently painted.

(1) USED 2012 MWS Model MWS s/n 2M91DV3B7CC185008 mobile doghouse trailer approximately 8-ft wide x 32-ft long. Trailer is equipped with spring-ride tandem 10,000-lbs axels mounted on dual wheels fitted with 225/70R22.5 tires. Change shack/ doghouse section; (8) lockers, knowledge box, fridge, desk, electric heater, storage benches, locking storage cabinets & fluorescent interior lighting. Light plant section; utility bench, vise, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet electric toilet. Light Plant; Isuzu Model NEMA powered by Isuzu Model 4BG1T 4-cylinder diesel unitized with Stamford 42-kW generator c/w day tank, electric start & switchgear s/n A05D389308. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED 2013 DynaWinch Model CD3-323 s/n 20856 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and



Saskatchewan Personal Property Registry Search Result

General Property

locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting s/n 24030. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2013 International Paystar Model 5918x6 tri drive truck s/n 1HTXVSJT8DJ146041; powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise.

(1) USED 2005 DynaWinch Model CDC-323 s/n 21270 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Last inspected April 13, 2010; mast s/n 21270. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by hydraulic motor s/n 054381889. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by hydraulic motor s/n 054081345. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth.

(1) USED 2005 International Paystar Model 5900I 8x6 Tri-axle truck s/n 1HTXTAPT26J225893 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp (15,026-metered hours) unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with approximately 10-mm of tread & polished aluminum wheels with air - operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2007 DynaWinch s/n 21681 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting; mast s/n 21681. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021; powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging



**Saskatchewan
Personal Property Registry
Search Result**

General Property

centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2012 DynaWinch s/n 33844 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 62-ft overall working height rated for 33,500-lb safe working load single line w/ guy lines, 67,000-lbs total mast static load. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) twostage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility s/n 23844. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (sideto-side movement), load cell & electronic depth counter.

(1) USED 2011 International Model Paystar tandemsteer tri-drive truck s/n 1HTXVAPT2BJ196710 ; powered by Cummins Model ISX600 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton travelling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2013 International Paystar Model 5918x6 tridrive truck s/n 1HTNWSMT3DJ603273 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Jolly Engineering Services Model JES-300 mud pump; 5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 120. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

(1) USED 1996 Western Star Model tri drive truck s/n 2WLNCCFF0TK941183; powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Garder Denver Model TEE mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 precharge pump & control console. Pump is energized by drop box via truck PTO s/n 0010377. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.

History - Amendment

Registration #: 301208502
Transaction #: 2

Amendment Date: 15-Jun-2017 15:20:02

Event Type: Amendment
Transaction Reason: Regular

Registrant

Party ID: 150242056 - 1
Entity Type: Business
Name: KANUKA THURINGER LLP

Address: 1400-2500 VICTORIA AVENUE
REGINA, Saskatchewan
S4P3X2
Canada



Saskatchewan Personal Property Registry Search Result

Serial Property

| | | | |
|---------------------|-------------------|--------------------|---------------------------|
| Action: | Delete | Year: | |
| Item #: | 12 | Make/Desc.: | Highway Tandem-axel truck |
| Serial Type: | Motor Vehicle | Model: | |
| Serial #: | 1FUX3EDB3SP599554 | Color: | |
| Override: | Yes | | |

General Property

(1) Used 2006 Rig Carrier, low-rider, 5-axel self-propelled back-in carrier s/n 2E9RSZ5Z36R073004. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65/22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Attached with 1 Used 2006, SJ Petro, XJ250S Double-drum drawworks s/n 06R0886197 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, SJ Petro bank 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-OMatic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @425-hp @ 32000 rpm. Transmission; Allison Model HT750-DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic Syste; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) Used 2000 Freightliner, Conventional truck equipped w/ Rock Well Model 941 s/n 1FVUF7WB1YPG53125 spring-ride front axel rate at 16,000-lb mounted on 385/65R22.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 19,000-lbs each, equipped w/ airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels, air -operated brakes & ABS braking system. Truck is c/w fuel tanks & locking storage compartments. Engine; Cummins Model Signature 600 15-L diesel engine rated at 600-hp @ 2000- rpm s/n 14004589 w/ PAS turbo Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission s/n 70333492-02. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700051. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses s/n 16980. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 06-353-54. (1) Set Foster Model 93R hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 05254-1, 2. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1237 Cavins depthometer for 14.28-mm. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 21,000-kPa 5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) HI-Kalibre safety valves, 27-in (73) s/n 114043 & 114044. (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body s/n 2646. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n 74742-3. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators s/n 74200. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0406006. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator; (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubular rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Shop-built mobile doghouse trailer s/n MWS200902; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n X06B070573. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricantsslings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet.

(1) USED 2000 Western Star. S/N 2WLPCD2G5YK960249, FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks. c/w 1 Used Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 300-hp @ 2100 s/n 9TL21455. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 2E9RSZ5Z96R073007. Tandemsteer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines,



Saskatchewan Personal Property Registry Search Result

General Property

primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission; Allison Model HT750- DRDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.

(1) USED 2003 Western Star Model 4900SA Tri Drive Log Truck s/n 5KPPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; C-15 diesel engine rated at 500-hp s/n MBN05778. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83-A 24, 100-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n 059-1764. (1) Set Gill Model 500 - hydraulic power tubing tongs s/n 500-896. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity 06099-1, 2. Schwab's Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN 1551. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI Model Double double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve s/n 60986-01. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubingspider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0606136. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assem. w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2010 Shop-built mobile doghouse trailer s/n MWS201002; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & gloved incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear s/n M11C110969 Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star Model 4964SX tandem axel truck s/n 2WKPDDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 500-hp @ 177 rpm. > Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2007 Crane Model DR0106 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square tubing stiff mast, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly KE-5042. Drawworks; Cooper double-drum drawworks w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver s/n 1949. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm s/n 06R0949883. Transmission; Allison Model HT750- DRDB torque-tube-drive automatic 5-speed transmission w/ power take-off s/n M5610A. Namco Model right angle drive box. Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2000 Western Star Model 4986FX tridrive pump truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; Cat Model 3406E diesel engine rated at 550-hp; 14.6-litre s/n 2WS19060. Transmission; Eaton Model RTLO-20918B, 18 speed manual transmission. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-l s/n 32700063. > Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two



Saskatchewan Personal Property Registry Search Result

General Property

compartments w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 06-349-24. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ (2) 51-mm outlet valves s/n 48558-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety 27-in (73-mm), (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n MSM04681. (1) set AOT Type TA65, 65-ton 60-mm (2-3/8 in) tubing elevators s/n 63068. (1) set AOT Type TA-100; 100-ton 73-mm (2-7/8 in) tubing elevators s/n 87752. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1017020. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator; (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axles equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n 752XL03.1GTB. Incinolet Model WB electric toilet.

(1) USED Rig Carrier; 2008 Iron tech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axles rated at 9,072-kg / axle equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ ABS braking system. Meritor single reduction tri-drive rear axles rated at 10,432-kg / axle mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Irontech Model 72-140S freestanding stiff mast 72-ft 21.9-m), 150,000-lbs (66,720- daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly s/n MO-45-07. Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks (splash-cooled & belt driven) c/w crown-saver & brakes s/n 9.KK.01.08. Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 665- hp @ 2300-rpm. Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. Rig-up right angle gear box s/n GP.54.08. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Irontech Class II carrier-mounted 22-gal accumulator system s/n AS081T00043.

(1) USED 2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK45PN91874. Meritor Model FL941 spring-ride front axle rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ airoperated brakes & ABS braking system. Tri-drive rear axles rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Detroit Series 60, 14-litre turbo diesel drive engine, rated @ 500-hp @ 1800 rpm s/n 05R0801867. Transmission; Allison Model 4700 OFS 5-speed automatic transmission w/ power take-off. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-Lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ 176-bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 1759866. (1) Set Tillery & Parks Type 5890-hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1240. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (API) double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 05-059. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body (1) Set Mission shallow hand slips w/ 60 to 89-mm dies (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in (4) Rod wrenches, 5/8-in to 1-in 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axles c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

(1) USED 1988 Western Star s/n 2WKPDDCJ8WK950999 Model 4964FX tandem-axle truck w/ Freightliner Model FL941 spring-ride front axle rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axles rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R24.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model 3406 diesel engine rated @ 490-hp



Saskatchewan Personal Property Registry Search Result

General Property

s/n 6TS16393. Transmission; Eaton Model RTLO- 18718B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, highangle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. (1) USED Rig Carrier; 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n 1CYEGW6879T049305. Tandemsteer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n 09.08.015. Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm. s/n 06R1006764. Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. Namco Model M94-RA45041 rght angle drive box s/n N07-16002. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc.

(1) USED 2000 Freightliner s/n 1FUUF7WB1YPG53125 Model T800 truck equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; ISX 530 diesel engine rated at 500- hp @ 2000-rpm s/n 79089324. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 875792. (1) Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 150T072/71. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN s/n 28528. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n K08-092. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ devis s/n H1208060. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubular rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over hydraulic operation, equipped with approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 55- kW generator c/w day tank, electric start & switchgear s/n 49606. Incinolet Model WB electric toilet.

(1) USED 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ air -operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm s/n 6NZ87182. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1978 Cardwell Model B140 s/n 78244, 4- axle self-propelled back-in carrier. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft)



Saskatchewan Personal Property Registry Search Result

General Property

square-tubing stiff mast, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n CE-4544. Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n 04RE102775. Transmission; Allison Model CLT750 torque-tube drive automatic transmission s/n 2510014086. > Bevel right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. > Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2006 Western Star Tri Drive s/n 5KJRALCV86PV36016 w/ springride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ airride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; > McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. (1) Set Gill Type 500 hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 mobile doghouse trailer s/n 2C9HB46D812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinlet Model WB electric toilet. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1980 Franks Type 300 s/n 196087 free standing 4-axle self-propelled back-in carrier. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on new 445/65-22.5 tires with approximately 15-mm of tread remaining complete with ABS braking system & Reyco suspension. Meritor tandem-drive Rockwell rear axels equipped with polished aluminum wheels mounted on 11R/24.5 tires with approximately 18-mm of tread remaining complete with ABS braking system. Singleman insulated cab w/ air-ride seat, fan, controls & gauges, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1980 Franks Model KR069 1405, 21-m (69-ft) square-tubing free standing stiff mast, 53,400-daN (120,000-lbs) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & 4 sheave crown assembly w/ (3) 20-in sheaves grooved for 3/4-in line & (1) 16-in sheave grooved for 1/2-in line. Rear stabilization shoe with leveling jacks and swing out stabilization arms s/n J12655. > Drawworks; Frank Model double-drum 42X10 drawworks. Main drum; 254-mm (10-in) x 1,066-mm (42-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, disc brake & crown saver. Engine; Detroit Series 50 8.5-litre turbocharged diesel drive engine rated at 315-hp @ approximately 2,100 rpm s/n 04R0023225. Transmission; Allison Model HT750 torquetube drive automatic transmission.& Chelsea PTO drive. Right angle drive box. Drill & Sandline; 1-inch (25.4-mm) x 3,000-m drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 250-gal tank, hydraulic power unit complete with Girdel hydraulic services pump, thermal exchanger, manifold, filters & hoses. System operates one 3-stage mast raisingcylinder, power tong, deck winches, etc.

(1) USED2003 Freightliner Model FLD120 truck s/n 1FVPAV83PL04474 equipped w/ Rock Well spring-ride front axel rated at 14,000-lbs mounted on polished aluminum wheels fitted with 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 55,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R24.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; (2) cylinder hydraulic live roll, driver's air-ride seat, tire chains, chalks. Engine; Cat Model C15 diesel engine rated at 450-hp @ approximately 2,100-rpm s/n 6NZ74661. Transmission; Eaton Fuller Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 6-in c/w forged fluid end, quick-change heads, 7-valve, 5,000-psi manifold, pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 30-m³ 188-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, steam coils, fill lines, man lift, external tank gauge, chiksans & mud. Condition Assessment; Mud system and tank is new (not truck). Drop box. Spark arrestors. Stretched frame Traveling & Rig Floor Equipment; McKissick Model Fig. 83A, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n W12163. (1) set Foster Type



Saskatchewan
Personal Property Registry
Search Result

General Property

593-R hydraulic power tubing tongs. (1) set Oil Country 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 38028391-04A/04B. Clipper Model weight indicator, 0-90,000- daN, calibrated to 62,000-dan s/n KCW00205. Cavins depthometer for 14.28-mm.B.O.P. Equipment; IEI (Control Tech) Model DBL double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n CT3465. Spool, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp w/ 51-mm outlet valve s/n API33911. Accumulator; 22-gal class II rig mounted accumulator system. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 89-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set 2 ?-in Type CL Upset 100-ton tubing Elevators s/n 36737080-01. (1) set 2 ?-in Type CL Upset 100-ton tubing elevators s/n 34353023-04. Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0611007. > (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Gubberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 International Model 5900i 6X4 Series s/n 1HTXRAET11J086477 tandem-axle tractor powered by Cummins Model N14460E1 turbo charged diesel engine rated at 450-hp @ 2,100 rpm. Engine is unitized with w/ Eaton Fuller 10 speed manual transmission & PTO. Tractor has single steer front axle mounted on 12R/22.5 tires w/ approximately 14-mm of tread remaining. Tractor has Tandem rear axles mounted on 11R24.5 tires w/ approximately 18-m of tread remaining. Truck also equipped w/ rear exterior lighting, rear hitch, drivers air ride seat, air ride suspension. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand with slider, tong rack, lubricator rack, etc. Condition Assessment; Truck frame stretched to accommodate deck and slider for BOP stand. Whole unit recently painted.

(1) USED 2012 MWS Model MWS s/n 2M91DV3B7CC185008 mobile doghouse trailer approximately 8-ft wide x 32-ft long. Trailer is equipped with spring-ride tandem 10,000-lbs axels mounted on dual wheels fitted with 225/70R22.5 tires. Change shack/ doghouse section; (8) lockers, knowledge box, fridge, desk, electric heater, storage benches, locking storage cabinets & fluorescent interior lighting. Light plant section; utility bench, vice, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet electric toilet. Light Plant; Isuzu Model NEMA powered by Isuzu Model 4BG1T 4-cylinder diesel unitized with Stamford 42-kW generator c/w day tank, electric start & switchgear s/n A05D389308. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED 2013 DynaWinch Model CD3-323 s/n 20856 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting s/n 24030. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2- speed hydraulic motor. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & VRoller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2013 International Paystar Model 5918x6 tri drive truck s/n 1HTXVSJT8DJ146041; powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise.

(1) USED 2005 DynaWinch Model CDC-323 s/n 21270 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16- in sheave grooved for ?-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Last inspected April 13, 2010; mast s/n 21270. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by



Saskatchewan Personal Property Registry Search Result

General Property

hydraulic motor s/n 054381889. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by hydraulic motor s/n 054081345. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth.

(1) USED 2005 International Paystar Model 5900I 8x6 Tri-axle truck s/n 1HTXTAPT26J225893 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp (15,026-metered hours) unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with approximately 10-mm of tread & polished aluminum wheels with air - operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2007 DynaWinch s/n 21681 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting; mast s/n 21681. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E -line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021; powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2012 DynaWinch s/n 33844 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 62-ft overall working height rated for 33,500-lb safe working load single line w/ guy lines, 67,000-lbs total mast static load. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) twostage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility s/n 23844. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2011 International Model Paystar tandemsteer tri-drive truck s/n 1HTXVAPT2BJ196710 ; powered by Cummins Model ISX600 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2013 International Paystar Model 5918x6 tridrive truck s/n 1HTNWSMT3DJ603273 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted



Saskatchewan
Personal Property Registry
Search Result

General Property

on11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Jolly Engineering Services Model JES-300 mud pump; 5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 120. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

(1) USED 1996 Western Star Model tri drive truck s/n 2WLNCCFF0TK941183; powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Gardner Denver Model TEE mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 precharge pump & control console. Pump is energized by drop box via truck PTO s/n 0010377. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.



Saskatchewan Personal Property Registry Search Result

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 03-Jul-2014 10:17:41

Registration #: 301208504
Expiry Date: 02-Jul-2024

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 Canada |

Secured Party

| | |
|--|--|
| Item #: 1 | Address: 600, 444 – 7 Avenue S.W. |
| Party ID: 151816583 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P0X8 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party

| | |
|---|----------------------------------|
| * Item #: 1 | Address: 46272 Highway 56 |
| Party ID: 152122503 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Mustang Well Services Ltd. | Canada |
| | |
| Item #: 2 | Address: 46272 Highway 56 |
| Party ID: 152122504 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: MRBD Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: International 5600 6.4 tri-drive truck |
| Serial #: 1HTXSAPT35J055979 | Model: |
| Override: No | Color: |
| | |
| Item #: 2 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star tri-drive truck |
| Serial #: 5KKPALCK45PU76629 | Model: |
| Override: No | Color: |
| | |
| Item #: 3 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZT5DJ304393 | Model: |
| Override: No | Color: |
| | |
| Item #: 4 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZT1CJ603037 | Model: |
| Override: No | Color: |
| | |
| Item #: 5 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZTLCJ603037 | Model: |
| Override: Yes | Color: |
| | |
| Item #: 6 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZT0CJ660216 | Model: |
| Override: No | Color: |
| | |
| Item #: 7 | Year: 2012 |



**Saskatchewan
Personal Property Registry
Search Result**

Serial Property

Serial Type: Motor Vehicle
Serial #: 1HTWNAZT9CJ078969
Override: No

Item #: 8
Serial Type: Motor Vehicle
Serial #: 1HTMKAAR87H407626
Override: No

Make/Desc.: International 7500SBA 6x4 single axel truck
Model:
Color:

Year: 2006
Make/Desc.: Western Star Tri Drive truck
Model:
Color:

General Property

(1) USED 2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979 ; powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. s/n 1201. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

(1) USED 2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629; powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radlo, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 1201. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

(1) USED 2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc s/n 24058. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls s/n 1201. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc.

(1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT1CJ603037; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.

(1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZTLCJ603037; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.

(1) USED 2012 International Model 7500SBA6X4 single axle truck s/n 1HTWNAZT0CJ660216; powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-



**Saskatchewan
Personal Property Registry
Search Result**

General Property

operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chucks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc s/n 23797. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.


(1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT9CJ078969; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chucks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.

(1) USED 2006 Western Star Tri Drive truck s/n 1HTMKAAR87H407626. Spring-ride front axel mounted on steel wheels equipped w/ air-operated brakes. Air-ride rear axels mounted on steel wheels. Steel-constructed carrier deck. Engine; Cat Model 3406E diesel engine rated at 475-hp.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.

End of Search Result

This is **Exhibit "M"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'Anthony Mersich', is written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

Search ID#: Z10255368

Transmitting Party

Gowling WLG (Canada) LLP

1600, 421 - 7 AVENUE S.W.
CALGARY, AB T2P 4K9

Party Code: 50016237
Phone #: 403 298 1004
Reference #: A155881/TSC

Search ID #: Z10255368

Date of Search: 2018-May-09

Time of Search: 13:08:31

Business Debtor Search For:

COMPLETE OILFIELD MANUFACTURING INC.

Exact Result(s) Only Found

NOTE:

A complete Search may result in a Report of Exact and Inexact Matches.

Be sure to read the reports carefully.



Search ID#: Z10255368

Business Debtor Search For:

COMPLETE OILFIELD MANUFACTURING INC.

Search ID #: Z10255368

Date of Search: 2018-May-09

Time of Search: 13:08:31

Registration Number: 14070720473

Registration Type: SECURITY AGREEMENT

Registration Date: 2014-Jul-07

Registration Status: Current

Expiry Date: 2019-Jul-07 23:59:59

Exact Match on: Debtor

No: 2

Amendments to Registration

15090234298

Amendment

2015-Sep-02

16022517845

Amendment

2016-Feb-25

Debtor(s)

Block

1 HOEDOWN EQUIPMENT LTD
PO BOX 1467
CAMROSE, AB T4V 1X4

Status

Current

Block

2 COMPLETE OILFIELD MANUFACTURING INC
PO BOX 1467
CAMROSE, AB T4V 1X4

Status

Current by
16022517845

Secured Party / Parties

Block

1 ALBERTA TREASURY BRANCHES - 07669
700,7300 48 AVENUE
CAMROSE, AB T4V 4W2

Status

Current

Phone #: 780 672 3331

Fax #: 780 672 5444

Collateral: Serial Number Goods

| <u>Block</u> | <u>Serial Number</u> | <u>Year</u> | <u>Make and Model</u> | <u>Category</u> | <u>Status</u> |
|---------------------|-----------------------------|--------------------|------------------------------|------------------------|----------------------|
|---------------------|-----------------------------|--------------------|------------------------------|------------------------|----------------------|

Search ID#: Z10255368

| | | | | | |
|---|-------------------|------|--------------------|--------------------|---------------------------|
| 1 | 1HTMNAAMX3H563284 | 2003 | INTERNATIONAL 4300 | MV - Motor Vehicle | Current By 15090234298 |
| 2 | 1FDXXX7P95EB93811 | 2005 | FORD F450 | MV - Motor Vehicle | Current By 15090234298 |
| 3 | 5Y4AM23Y08A000938 | 2008 | YAMAHA YXR700F ATV | MV - Motor Vehicle | Current By 15090234298 |
| 4 | 1HTMMAAN72H544962 | 2002 | IHC 4300 | MV - Motor Vehicle | Current By 15090234298 |

Collateral: General

| <u>Block</u> | <u>Description</u> | <u>Status</u> |
|---------------------|--|----------------------|
| 1 | ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY | Current |
| 2 | PROCEEDS: ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY DERIVED DIRECTLY OR INDIRECTLY FROM ANY DEALINGS WITH THE ORIGINAL COLLATERAL OR PROCEEDS THEREOF | Current |
| 3 | ALL ACCOUNTS, INSTRUMENTS AND ALL SUPPORTING RECORDS | Current |
| 4 | ALL INVENTORY | Current |

Search ID#: Z10255368



Business Debtor Search For:

COMPLETE OILFIELD MANUFACTURING INC.

Search ID #: Z10255368

Date of Search: 2018-May-09

Time of Search: 13:08:31

Registration Number: 16051030740

Registration Type: SECURITY AGREEMENT

Registration Date: 2016-May-10

Registration Status: Current

Expiry Date: 2022-May-10 23:59:59

Exact Match on: Debtor

No: 1

Debtor(s)

Block

Status

| | | |
|---|---|---------|
| 1 | COMPLETE OILFIELD MANUFACTURING INC. 46272 HWY 56 CAMROSE, AB T4V 1X4 | Current |
|---|---|---------|

Secured Party / Parties

Block

Status

| | | |
|---|---|---------|
| 1 | BDC CAPITAL INC. BARCLAY CENTRE, 110, 444 - 7TH AVENUE SW CALGARY, AB T2P 0X8 | Current |
|---|---|---------|

Collateral: Serial Number Goods

| <u>Block</u> | <u>Serial Number</u> | <u>Year</u> | <u>Make and Model</u> | <u>Category</u> | <u>Status</u> |
|---------------------|-----------------------------|--------------------|------------------------------|------------------------|----------------------|
| 1 | 1HTMMAANX5H132068 | 2005 | International 4000 Series | MV - Motor Vehicle | Current |
| 2 | 1HTMMAAN72H544962 | 2002 | International 4000 Series | MV - Motor Vehicle | Current |

Collateral: General

Block


Description

Status

| | | |
|---|--|---------|
| 1 | All present and after-acquired personal property and proceeds. | Current |
|---|--|---------|

Result Complete

This is **Exhibit "N"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'A. Mersich', is written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

BC OnLine: PPRS SEARCH RESULT 2018/05/10
Lterm: XPSP0054 For: PA48772 GOWLING, LAFLEUR HENDERSON LLP 12:28:56

Attn./Ref. No.: A155881/TSC

Index: BUSINESS DEBTOR

Search Criteria: COMPLETE OILFIELD MANUFACTURING INC.

***** P P S A S E C U R I T Y A G R E E M E N T *****

Reg. Date: SEP 10, 2015 Reg. Length: 5 YEARS
Reg. Time: 07:38:49 Expiry Date: SEP 10, 2020
Base Reg. #: 832650I Control #: D3316383

Block#

S0001 Secured Party: ALBERTA TREASURY BRANCHES
700, 7300-48 AVENUE
CAMROSE AB T4V 4W2

D0001 Base Debtor: HOEDOWN EQUIPMENT LTD
(Business) PO BOX 1467
CAMROSE AB T4V 1X4

Vehicle Collateral:

| Type | Serial # | Year | Make/Model | MH Reg.# |
|-------|----------|-------------------|-------------------------|----------|
| V0001 | MV | 1HTMNAAMX3H563284 | 2003 INTERNATIONAL 4300 | |
| V0002 | MV | 1FDXXX7P95EB93811 | 2005 FORD F450 | |
| V0003 | MV | 5Y4AM23Y08A000938 | 2008 YAMAHA YXR700F ATV | |
| V0004 | MV | 1HTMMAAN72H544962 | 2002 IHC 4300 | |

General Collateral:

ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY

Registering

Party: ALBERTA TREASURY BRANCHES
700, 7300 - 48 AVENUE
CAMROSE AB T4V 4W2

----- A M E N D M E N T / O T H E R C H A N G E -----

Reg. #: 467749J Reg. Date: AUG 10, 2016
Reg. Time: 09:37:13
Control #: D3965562

Base Reg. Type: PPSA SECURITY AGREEMENT
Base Reg. #: 832650I Base Reg. Date: SEP 10, 2015

Details Description:


ADD ADDITIONAL DEBTOR.

Block#

*** ADDED ***

=D0002 Bus. Debtor: COMPLETE OILFIELD MANUFACTURING INC
BOX 1467
CAMROSE AB T4V 1X4

This is **Exhibit "O"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018



A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor



Saskatchewan Personal Property Registry Search Result

Searching Party: Gowling Lafleur Henderson LLP
Search Date: 10-May-2018 13:25:25
Search Type: Standard

Search #: 202745197
Client Reference: A155881/TSC
Control #:

Search Criteria

Search By: Business Debtor Name

Business Name
Complete Oilfield Manufacturing Inc.

The following list displays all matches & indicates the ones that were selected.

1 Registration(s) Found: Exacts (0) - Similar (1)

| Selected | Match | Registration # | Registration Type | Debtor Name | City | Enforcement Instruction | Enforcement Instruction Registration # |
|----------|---------|----------------|--------------------------------------|-------------------------------------|---------|-------------------------|--|
| Yes | Similar | 301389130 | Personal Property Security Agreement | Complete Oilfield Manufacturing Inc | CAMROSE | No | N/A |



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 10-Sep-2015 08:38:14

Registration #: 301389130
Expiry Date: 10-Sep-2020

Event Type: Amendment
Transaction Reason: Regular

Notations

Trust Indenture: NO

Registrant

| | |
|--------------------------------------|---|
| Party ID: 152167111 - 1 | Address: 939 EGLINTON AVE. EAST, SUITE 201 |
| Entity Type: Business | TORONTO, Ontario |
| Name: D+H LIMITED PARTNERSHIP | M4G4H7 |
| | Canada |

Secured Party

| | |
|--|-------------------------------------|
| Item #: 1 | Address: 700, 7300-48 AVENUE |
| Party ID: 152200568 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V4W2 |
| Name: ALBERTA TREASURY BRANCHES | Canada |

Debtor Party

| | |
|--|-----------------------------|
| Item #: 1 | Address: PO BOX 1467 |
| Party ID: 152409454 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: HOEDOWN EQUIPMENT LTD | Canada |
| * Item #: 2 | Address: Box 1467 |
| Party ID: 152608110 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Complete Oilfield Manufacturing Inc | Canada |

Serial Property

| | |
|------------------------------------|----------------------------------|
| Item #: 1 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: INTERNATIONAL |
| Serial #: 1HTMNAAMX3H563284 | Model: 4300 |
| Override: No | Color: |
| Item #: 2 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: FORD |
| Serial #: 1FDXXX7P95EB93811 | Model: F450 |
| Override: Yes | Color: |
| Item #: 3 | Year: 2008 |
| Serial Type: Motor Vehicle | Make/Desc.: YAMAHA |
| Serial #: 5Y4AM23Y08A000938 | Model: YXR700F ATV |
| Override: No | Color: |
| Item #: 4 | Year: 2002 |
| Serial Type: Motor Vehicle | Make/Desc.: IHC |
| Serial #: 1HTMMAAN72H544962 | Model: 4300 |
| Override: No | Color: |

General Property

ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY

History - Setup

Registration Type: Personal Property Security Agreement
Registration Date: 10-Sep-2015 08:38:14

Registration #: 301389130
Transaction #: 1



**Saskatchewan
Personal Property Registry
Search Result**

Expiry Date: 10-Sep-2020

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: NO

Registrant

| | |
|---|-------------------------------------|
| Party ID: 150000519 - 1 | Address: 4126 Norland Avenue |
| Entity Type: Business | Burnaby, British Columbia |
| Name: Canadian Securities Registration Systems | V5G3S8 Canada |

Secured Party

| | |
|--|-------------------------------------|
| Item #: 1 | Address: 700, 7300-48 AVENUE |
| Party ID: 152200568 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V4W2 |
| Name: ALBERTA TREASURY BRANCHES | Canada |

Debtor Party

| | |
|------------------------------------|-----------------------------|
| Item #: 1 | Address: PO BOX 1467 |
| Party ID: 152409454 - 1 | CAMROSE, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: HOEDOWN EQUIPMENT LTD | Canada |

Serial Property

| | |
|------------------------------------|----------------------------------|
| Item #: 1 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: INTERNATIONAL |
| Serial #: 1HTMNAAMX3H563284 | Model: 4300 |
| Override: No | Color: |
| Item #: 2 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: FORD |
| Serial #: 1FDXXX7P95EB93811 | Model: F450 |
| Override: Yes | Color: |
| Item #: 3 | Year: 2008 |
| Serial Type: Motor Vehicle | Make/Desc.: YAMAHA |
| Serial #: 5Y4AM23Y08A000938 | Model: YXR700F ATV |
| Override: No | Color: |
| Item #: 4 | Year: 2002 |
| Serial Type: Motor Vehicle | Make/Desc.: IHC |
| Serial #: 1HTMMAAN72H544962 | Model: 4300 |
| Override: No | Color: |

General Property

ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY

History - Amendment

Registration #: 301389130
Transaction #: 2

Amendment Date: 10-Aug-2016 11:25:30

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|--------------------------------------|---|
| Party ID: 152167111 - 1 | Address: 939 EGLINTON AVE. EAST, SUITE 201 |
| Entity Type: Business | TORONTO, Ontario |
| Name: D+H LIMITED PARTNERSHIP | M4G4H7 Canada |




**Saskatchewan
Personal Property Registry
Search Result**

Debtor Party

| | | | |
|---------------------|-------------------------------------|-----------------|------------------|
| Action: | Add | Address: | Box 1467 |
| Item #: | 2 | | CAMROSE, Alberta |
| Party ID: | 152608110 - 1 | | T4V1X4 |
| Entity Type: | Business | | Canada |
| Name: | Complete Oilfield Manufacturing Inc | | |

End of Search Result

This is **Exhibit "P"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018



A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

Search ID#: Z10258622

Transmitting Party

Gowling WLG (Canada) LLP
1600, 421 - 7 AVENUE S.W.
CALGARY, AB T2P 4K9

Party Code: 50016237
Phone #: 403 298 1004
Reference #: A155881/T. Cumming

Search ID #: Z10258622

Date of Search: 2018-May-10

Time of Search: 09:45:05

Business Debtor Search For:

MRBD LTD.

Exact Result(s) Only Found

NOTE:

A complete Search may result in a Report of Exact and Inexact Matches.

Be sure to read the reports carefully.



Search ID#: Z10258622

Business Debtor Search For:

MRBD LTD.

Search ID #: Z10258622

Date of Search: 2018-May-10

Time of Search: 09:45:05

Registration Number: 14063016154

Registration Type: SECURITY AGREEMENT

Registration Date: 2014-Jun-30

Registration Status: Current

Expiry Date: 2024-Jun-30 23:59:59

Exact Match on: Debtor

No: 2

Amendments to Registration

| | | |
|-------------|-----------|-------------|
| 14070313968 | Amendment | 2014-Jul-03 |
| 14102024427 | Amendment | 2014-Oct-20 |
| 17050823604 | Amendment | 2017-May-08 |
| 17060224410 | Amendment | 2017-Jun-02 |
| 17061537953 | Amendment | 2017-Jun-15 |

Debtor(s)

Block

| | | |
|---|---|---------|
| 1 | MUSTANG WELL SERVICES LTD. 46272 HIGHWAY 56 CAMROSE, AB T4V 1X4 | Current |
|---|---|---------|

Block

| | | |
|---|--|---------|
| 2 | MRBD LTD. 46272 HIGHWAY 56 CAMROSE, AB T4V 1X4 | Current |
|---|--|---------|

Secured Party / Parties

Block

| | | |
|---|--|---------|
| 1 | ALBERTA TREASURY BRANCHES 600, 444 - 7 AVENUE S.W. CALGARY, AB T2P 0X8 | Current |
|---|--|---------|

Collateral: Serial Number Goods

Search ID#: Z10258622

| <u>Block</u> | <u>Serial Number</u> | <u>Year</u> | <u>Make and Model</u> | <u>Category</u> | <u>Status</u> |
|--------------|----------------------|-------------|---------------------------|--------------------|---------------------------|
| 1 | 2E9RSZ5Z36R073004 | 2006 | Rig Carrier low rider | MV - Motor Vehicle | Current |
| 2 | 1FVUF7WB1YPG53125 | 2000 | Freightliner Conventional | MV - Motor Vehicle | Current |
| 3 | MWS200902 | 2009 | Mobile doghouse trailer | TR - Trailer | Current |
| 4 | 2WLPD2G5YK960249 | 2000 | Western Star FL941 | MV - Motor Vehicle | Current |
| 5 | 239RSZ5Z96R073007 | 2006 | Rig Carrier low rider | MV - Motor Vehicle | Deleted By 14070313968 |
| 6 | 5KKPALAV83PL79816 | 2003 | Western Star 4900SA | MV - Motor Vehicle | Current |
| 7 | MWS201002 | 2010 | Mobile doghouse trailer | TR - Trailer | Current |
| 8 | 2WKPDDJH4YK962165 | 2000 | Western Star 5964SX | MV - Motor Vehicle | Current |
| 9 | 1CYEGW6847T047676 | 2007 | Crane DR0106 5 axel | MV - Motor Vehicle | Deleted By 14070313968 |
| 10 | 2WLPSDCJ3YK962739 | 2000 | Western Star 4986FX | MV - Motor Vehicle | Current |
| 11 | 2M91DV3B7CC185001 | 2012 | Shop-built mobile | TR - Trailer | Current |
| 12 | 1FUX3EDB3SP599554 | 1000 | Highway Tandem-axel truck | MV - Motor Vehicle | Deleted By 17061537953 |
| 13 | 2R9R4CF128E690061 | 2008 | Iron tech SR242 5-axel | MV - Motor Vehicle | Current |
| 14 | 5KJRALCK45PN91874 | 2005 | Western Star 4964SA | MV - Motor Vehicle | Current |
| 15 | MWS004 | 1998 | Shop-built mobile | TR - Trailer | Current |
| 16 | 2WKPDDCJ8WK950999 | 1988 | Western Star 4964FX | TR - Trailer | Current |
| 17 | 1CYEGW6879T049305 | 2009 | Crane DR20106 5-axel | MV - Motor Vehicle | Current |
| 18 | 1FUUF7WB1YPG53125 | 2000 | Freightliner T800 Truck | MV - Motor Vehicle | Current |
| 19 | 2S9NL666491022197 | 2009 | Southland CHT225009535-84 | TR - Trailer | Current |
| 20 | 1FVPA6AV43PL05431 | 2003 | Freightliner Columbia | MV - Motor Vehicle | Current |
| 21 | 78244 | 1978 | Cardwell B140 4 axel | MV - Motor Vehicle | Current |
| 22 | 5KJRALCV86PV36016 | 2006 | Western Star Tri-drive | MV - Motor Vehicle | Current |
| 23 | 2C9HB46D812044028 | 2001 | Doghouse trailer | TR - Trailer | Current |
| 24 | 196087 | 1980 | Franks Type 300 free | MV - Motor Vehicle | Current |
| 25 | 1FVPALAV83PL04474 | 2003 | Freightliner FLD120 truck | MV - Motor Vehicle | Current |
| 26 | 1HTXRAET11J086477 | 2001 | International 5900i 6x4 | MV - Motor Vehicle | Current |
| 27 | 2M91DV3B7CC185008 | 2012 | MWS mobile doghouse | TR - Trailer | Current |
| 28 | 20856 | 2013 | DynaWinch CD3-323 | TR - Trailer | Current |
| 29 | 1HTXVSJT8DJ146041 | 2013 | International Paystar 591 | MV - Motor Vehicle | Current |
| 30 | 21270 | 2005 | DynaWinch CDC-323 | TR - Trailer | Current |
| 31 | 1HTXTAPT26J225893 | 2005 | International Paystar 59 | MV - Motor Vehicle | Current |

Search ID#: Z10258622

| | | | | | |
|----|--------------------|------|---------------------------|--------------------|---------------------------|
| 32 | 21681 | 2007 | DynaWinch recorder body | TR - Trailer | Current |
| 33 | 1HTXSAPT67J407021 | 2007 | International 5618 7x6 | MV - Motor Vehicle | Current |
| 34 | 33844 | 2012 | DynaWinch recorder body | TR - Trailer | Current |
| 35 | 1HTXVAPT2BJ196710 | 2011 | International Paystar | MV - Motor Vehicle | Current |
| 36 | 1HTNWSMT3DJ603273 | 2013 | International Paystar 591 | MV - Motor Vehicle | Current |
| 37 | 2WLNCCFF0TK941183 | 1996 | Western Star tri drive | MV - Motor Vehicle | Current |
| 38 | 1HTXSAPT35J055979 | 2005 | International 5600 6.4 | MV - Motor Vehicle | Current |
| 39 | 5KKPALCK45PU76629 | 2005 | Western Star tri-drive | MV - Motor Vehicle | Current |
| 40 | 1HTWNAZT5DJ304393 | 2013 | International 7500SBA 6x4 | MV - Motor Vehicle | Current |
| 41 | 1HTWNAZT1CJ603037 | 2012 | International 7500SBA 6x4 | MV - Motor Vehicle | Current |
| 42 | 1HTWNAZTLCJ603037 | 2002 | International 7500SBA 6x4 | MV - Motor Vehicle | Deleted By 14070313968 |
| 43 | 1HTWNAZT0CJ660216 | 2012 | International 7500SBA 6x4 | MV - Motor Vehicle | Current |
| 44 | 1HTWNAZT9CJ078969 | 2012 | International 7500SBA 6x4 | MV - Motor Vehicle | Current |
| 45 | 1HTMKAAR87H407626 | 2006 | Western Star Tri Drive | MV - Motor Vehicle | Current |
| 46 | 2E9RSZ5Z96R073007 | 2006 | Rig Carrier low rider | MV - Motor Vehicle | Current By 14070313968 |
| 47 | 1CYEGW6837T047676 | 2007 | Crane DR0106 5 axel | MV - Motor Vehicle | Current By 14070313968 |
| 48 | 1HTWNAZTLCJ603037 | 2012 | International 7500SBA 6x4 | MV - Motor Vehicle | Current By 14070313968 |
| 49 | 1HTWNAZT5DH304393 | 2013 | International 7000 series | MV - Motor Vehicle | Current By 17050823604 |
| 50 | 2WLNCCFF0TK941183 | 1996 | Western Star Conventional | MV - Motor Vehicle | Current By 17050823604 |
| 51 | 2HSFMALR2SC011776 | 1995 | International 9200 | MV - Motor Vehicle | Current By 17050823604 |
| 52 | 4220491008 | 2002 | Fabtec Doghouse | TR - Trailer | Current By 17050823604 |
| 53 | 1HTXSAPT353055979 | 2005 | International 5600 | MV - Motor Vehicle | Current By 17050823604 |
| 54 | 1HTWNAZT0CJ660216 | 2012 | International 7000 series | MV - Motor Vehicle | Current By 17050823604 |
| 55 | 4220491108 | 2002 | Fabtec Doghouse | TR - Trailer | Current By 17050823604 |
| 56 | 1HTMKAAR56H311306 | 2006 | International 4000 series | MV - Motor Vehicle | Current By 17050823604 |
| 57 | E9R5SZ5Z296R073007 | 2006 | Rig Carrier low rider | MV - Motor Vehicle | Current By 17060224410 |

Search ID#: Z10258622

| | | | | | |
|----|--------------------|------|-------------------------|--------------------|---------------------------|
| 58 | 1XKDDDB0X41J963207 | 2001 | Kenworth | MV - Motor Vehicle | Current By 17060224410 |
| 59 | 2M91DV3B7CC185003 | 2012 | MWS mobile doghouse | TR - Trailer | Current By 17060224410 |
| 60 | 2WLHALAS63KL05584 | 2003 | Western Star 590016X4 | MV - Motor Vehicle | Current By 17060224410 |
| 61 | 2RCR54D4C16F8393 | 2012 | Rig Carrier Rykar SR500 | MV - Motor Vehicle | Current By 17060224410 |
| 62 | 2HSFMALR2SC011776 | 1995 | International 9200 | MV - Motor Vehicle | Current By 17060224410 |
| 63 | 5KKPALCK4SPU76629 | 2005 | Western Star Tri-Drive | MV - Motor Vehicle | Current By 17060224410 |
| 64 | 2C9HB46D12044028 | 2001 | ITB mobile doghouse | TR - Trailer | Current By 17060224410 |

Collateral: General

Block **Description**

1 (1) Used 2006 Rig Carrier, low-rider, 5-axel self-propelled back-in carrier s/n 2E9RSZ5Z36R073004. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65/22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast, Mdi. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Attached with 1 Used 2006, SJ Petro, XJ250S Double-drum drawworks s/n 06R0886197 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, SJ Petro bankd 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-OMatic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @425-hp @ 32000 rpm. Transmission; Allison Model HT750-DRDDB torque-tube-drive automatic 5-speed transmission w/ power tak-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear leveling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

Status

Current

Search ID#: Z10258622

- 2 (1) Used 2000 Freightliner, Conventional truck equipped w/ Rock Well Model 941 s/n 1FVUF7WB1YPG53125 spring-ride front axle rated at 16,000-lb mounted on 385/65R22.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Tri-drive rear axles rated at 19,000-lbs each, equipped w/ airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Truck is c/w fuel tanks & locking storage compartments. Engine; Cummins Model Signature 600 15-L diesel engine rated at 600-hp @ 2000- rpm s/n 14004589 w/ PAS turbo Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission s/n 70333492-02. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700051. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses s/n 16980. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for -in line s/n 06-353-54. (1) Set Foster Model 93R hydraulic power tubing tongs. Current
- 3 (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 05254-1, 2. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1237 Cavins depthometer for 14.28-mm. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 21,000-kPa 5,000-psi wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 2 -in (73) s/n 114043 & 114044. (1) Lot of saver subs, 2 -in (73-mm) & 3 -in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body s/n 2646. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n 74742-3. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators s/n 74200. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0406006. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. Current

Search ID#: Z10258622

- 4 (1) USED 2009 Shop-built mobile doghouse trailer s/n MWS200902; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n X06B070573. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricantsslings, chains, w/ electric heater, grinder, vice, work benches & incinolet toilet.
- (1) USED 2000 Western Star. S/N 2WLPCD2G5YK960249, FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks. c/w 1 Used Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 300-hp @ 2100 s/n 9TL21455. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.
- 5 (1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 239RSZ5Z96R073007. Tandemsteer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.
- Current
- Current

Search ID#: Z10258622

- 6 (1) USED 2003 Western Star Model 4900SA Tri Drive Log Truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine: C-15 diesel engine rated at 500-hp s/n MBN05778. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83-A 24, 100-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n 059-1764. (1) Set Gill Model 500 - hydraulic power tubing tongs s/n 500-896. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity 06099-1, 2. Schwab's Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN 1551. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI Model Double double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve s/n 60986-01. BOP hoses, valves, hoses, studs, nuts, etc.
- Current
- 7 (2) Hi-Kalibre safety valves, 2 -in (73-mm). (1) Lot of saver subs, 2 -in (73-mm) & 3 -in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubingspider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0606136. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assem. w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.
- Current

Search ID#: Z10258622

- 8 (1) USED 2010 Shop-built mobile doghouse trailer s/n MWS201002; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear s/n M11C110969 Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Current
- (1) USED 2000 Western Star Model 4964SX tandem axel truck s/n 2WKPDDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Cat Model C15 turbo-charged diesel engine rated @ 500-hp @ 177 rpm. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.
- 9 (1) USED Rig Carrier; 2007 Crane Model DR0106 5-axle self-propelled back-in carrier s/n 1CYEGW6847T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square tubing stiff mast, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly KE-5042. Drawworks; Cooper double-drum drawworks w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver s/n 1949. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm s/n 06R0949883. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off s/n M5610A. Namco Model right angle drive box. Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (14.28-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system. Current

Search ID#: Z10258622

- 10 (1) USED 2000 Western Star Model 4986FX tridrive pump truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; Cat Model 3406E diesel engine rated at 550-hp; 14.6-litre s/n 2WS19060. Transmission; Eaton Model RTLO-20918B, 18 speed manual transmission. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-l s/n 32700063. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m (163.5-bbl) mud tank with settling-trough, two compartments w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 06-349-24. Current
- 11 (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ (2) 51-mm outlet valves s/n 48558-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety 2 -in (73-mm). (1) Lot of saver subs, 2 -in (73-mm) & 3 -in (89-mm). Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n MSM04681. (1) set AOT Type TA65, 65-ton 60-mm (2-3/8 in) tubing elevators s/n 63068. (1) set AOT Type TA-100; 100-ton 73-mm (2-7/8 in) tubing elevators s/n 87752. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1017020. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600 /900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. Current
- 12 (1) USED 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n 75ZXL03.1GTB. Incinolet Model WB electric toilet. Current

Search ID#: Z10258622

- 13 (1) USED Highway tandem-axel truck equipped w/ Rock Well Model 941 s/n 1FUX3EDB3SP599554 springride front axel mounted on 385/65R22.5 tires w/ approximately 8-mm of tread remaining, polished aluminum wheels, air -operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 350-hp @ 2100 rpm s/n 9CK15423. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. Deleted By 17061537953
- 14 (1) USED Rig Carrier; 2008 Iron tech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ ABS braking system. Meritor single reduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Irontech Model 72-140S freestanding stiff mast 72-ft 21.9-m), 150,000-lbs (66,720- daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly s/n MO-45-07. Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks (splash-cooled & belt driven) c/w crown-saver & brakes s/n 9.KK.01.08. Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 665- hp @ 2300-rpm. Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. Rig-up right angle gear box s/n GP.54.08. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043. Current

Search ID#: Z10258622

- 15 (1) USED 2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK45PN91874. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ aioperated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ aioperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chawks etc. Detroit Series 60, 14-litre turbo diesel drive engine, rated @ 500-hp @ 1800 rpm s/n 05R0801867. Transmission; Allison Model 4700 OFS 5-speed automatic transmission w/ power take-off. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-Lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m 176-bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for -in line s/n 1759866. (1) Set Tillery & Parks Type 5890-hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1240. Current
- 16 Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (API) double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 05-059. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body (1) Set Mission shallow hand slips w/ 60 to 89-mm dies (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in (4) Rod wrenches, 5/8-in to 1-in 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. Current
- 17 (1) USED 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Current

Search ID#: Z10258622

- 18 (1) USED 1988 Western Star s/n 2WKPDDCJ8WK950999 Model 4964FX tandem-axel truck w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R24.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model 3406 diesel engine rated @ 490-hp s/n 6TS16393. Transmission; Eaton Model RTLO- 18718B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, highangle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. Current
- 19 (1) USED Rig Carrier; 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n 1CYEGW6879T049305. Tandemsteer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n 09.08.015. Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm. s/n 06R1006764. Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. Namco Model M94-RA45041 right angle drive box s/n N07-16002. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc. Current

Search ID#: Z10258622

- 20 (1) USED 2000 Freightliner s/n 1FUUF7WB1YPG53125 Model T800 truck equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; ISX 530 diesel engine rated at 500- hp @ 2000-rpm s/n 79089324. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 32-m 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 875792. (1) Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 150T072/71. Canglobal Model Clipper-weight indicator, 0- 90,000-daN, calibrated to 62,000-daN s/n 28528. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n K08-092. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment;
- Current
- 21 (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1208060. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.
- Current
- 22 (1) USED 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over hydraulic operation, equipped with approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 55- kW generator c/w day tank, electric start & switchgear s/n 49606. Incinolet Model WB electric toilet.
- Current

Search ID#: Z10258622

- 23 (1) USED 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chocks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm s/n 6NZ87182. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. Current
- 24 (1) USED Rig Carrier; 1978 Cardwell Model B140 s/n 78244, 4- axle self-propelled back-in carrier. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n CE-4544. Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n 04RE102775. Transmission; Allison Model CLT750 torque-tube drive automatic transmission s/n 2510014086. Bevel right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. Class II carrier-mounted 22-gal accumulator system. Current
- 25 (1) USED 2006 Western Star Tri Drive s/n 5KJRALCV86PV36016 w/ springride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ airride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & Mud Tank; Steel-fabricated 32-m 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. (1) Set Gill Type 500 hydraulic power tubing tongs. Current

Search ID#: Z10258622

- 26 (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. Current
- 27 (1) USED 2001 mobile doghouse trailer s/n 2C9HB46D812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. Current

Search ID#: Z10258622

- 28 (1) USED Rig Carrier; 1980 Franks Type 300 s/n 196087 free standing 4-axle self-propelled back-in carrier. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on new 445/65-22.5 tires with approximately 15-mm of tread remaining complete with ABS braking system & Reyco suspension. Meritor tandem-drive Rockwell rear axels equipped with polished aluminum wheels mounted on 11R/24.5 tires with approximately 18-mm of tread remaining complete with ABS braking system. Singleman insulated cab w/ air-ride seat, fan, controls & gauges, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1980 Franks Model KR069 1405, 21-m (69-ft) square-tubing free standing stiff mast, 53,400-daN (120,000-lbs) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & 4 sheave crown assembly w/ (3) 20-in sheaves grooved for 3/4-in line & (1) 16-in sheave grooved for 1/2-in line. Rear stabilization shoe with leveling jacks and swing out stabilization arms s/n J12655. Drawworks; Frank Model double-drum 42X10 drawworks. Main drum; 254-mm (10-in) x 1,066-mm (42-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, disc brake & crown saver. Engine; Detroit Series 50 8.5-litre turbocharged diesel drive engine rated at 315-hp @ approximately 2,100 rpm s/n 04R0023225. Transmission; Allison Model HT750 torquetube drive automatic transmission & Chelsea PTO drive. Right angle drive box. Drill & Sandline; 1-inch (25.4-mm) x 3,000-m drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 250-gal tank, hydraulic power unit complete with Girdel hydraulic services pump, thermal exchanger, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, power tong, deck winches, etc. Current
- 29 (1) USED 2003 Freightliner Model FLD120 truck s/n 1FVPALAV83PL04474 equipped w/ Rock Well spring-ride front axel rated at 14,000-lbs mounted on polished aluminum wheels fitted with 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 55,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R24.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; (2) cylinder hydraulic live roll, driver's air-ride seat, tire chains, chocks. Engine; Cat Model C15 diesel engine rated at 450-hp @ approximately 2,100-rpm s/n 6NZ74661. Transmission; Eaton Fuller Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 6-in c/w forged fluid end, quick-change heads, 7-valve, 5,000-psi manifold, pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 30-m 188-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, steam coils, fill lines, man lift, external tank gauge, chocks & mud. Condition Assessment; Mud system and tank is new (not truck). Drop box. Spark arrestors. Stretched frame Traveling & Rig Floor Equipment; McKissick Model Fig. 83A, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n W12163. Current

Search ID#: Z10258622

- 30 (1) set Foster Type 593-R hydraulic power tubing tongs. (1) set Oil Country 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 38028391-04A/04B. Clipper Model weight indicator, 0-90,000- daN, calibrated to 62,000-dan s/n KCW00205. Cavins depthometer for 14.28-mm.B.O.P. Equipment; IEL (Control Tech) Model DBL double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n CT3465. Spool, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp w/ 51-mm outlet valve s/n API33911. Accumulator; 22-gal class II rig mounted accumulator system. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 89-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set 2 -in Type CL Upset 100-ton tubing Elevators s/n 36737080-01. (1) set 2 -in Type CL Upset 100-ton tubing elevators s/n 34353023-04. Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0611007. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. Current
- 31 (1) USED 2001 International Model 5900i 6X4 Series s/n 1HTXRAET11J086477 tandem-axle tractor powered by Cummins Model N14460E1 turbo charged diesel engine rated at 450-hp @ 2,100 rpm. Engine is unitized with w/ Eaton Fuller 10 speed manual transmission & PTO. Tractor has single steer front axle mounted on 12R/22.5 tires w/ approximately 14-mm of tread remaining. Tractor has Tandem rear axles mounted on 11R24.5 tires w/ approximately 18-m of tread remaining. Truck also equipped w/ rear exterior lighting, rear hitch, drivers air ride seat, air ride suspension. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand with slider, tong rack, lubricator rack, etc. Condition Assessment; Truck frame stretched to accommodate deck and slider for BOP stand. Whole unit recently painted. Current
- 32 (1) USED 2012 MWS Model MWS s/n 2M91DV3B7CC185008 mobile doghouse trailer approximately 8-ft wide x 32-ft long. Trailer is equipped with spring-ride tandem 10,000-lbs axels mounted on dual wheels fitted with 225/70R22.5 tires. Change shack/ doghouse section; (8) lockers, knowledge box, fridge, desk, electric heater, storage benches, locking storage cabinets & fluorescent interior lighting. Light plant section; utility bench, vise, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet electric toilet. Light Plant; Isuzu Model NEMA powered by Isuzu Model 4BG1T 4-cylinder diesel unitized with Stamford 42-kW generator c/w day tank, electric start & switchgear s/n A05D389308. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. Current

Search ID#: Z10258622

- 33 (1) USED 2013 DynaWinch Model CD3-323 s/n 20856 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for -in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for -in line (approximately 800-ft line on), (2) 10-in sheaves grooved for -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting s/n 24030. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of -in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of -in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2- speed hydraulic motor. E-line measuring head assembly; measuring head grooved for -in E-line c/w encoders & VRoller guide assembly (side-to-side movement), load cell & electronic depth counter. Current
- 34 (1) USED 2013 International Paystar Model 5918x6 tri drive truck s/n 1HTXVSJT8DJ146041; powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 -in dump bailers, 3 -in & 5 -in lubricators, Vanoil 5 -in R45 x 3000-psi flange, 3 -in x 3,000-psi BOP, 5 -in x 5,000-psi BOP w/ Nace trim, Vanoil 4 -in x 5 -in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for -in line, CCL assembly w/ junk basket & gauge ring noise. Current

Search ID#: Z10258622

- 35 (1) USED 2005 DynaWinch Model CDC-323 s/n 21270 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for -in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for -in line (approximately 800-ft line on), (2) 10-in sheaves grooved for -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Last inspected April 13, 2010; mast s/n 21270. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of -in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by hydraulic motor s/n 054381889. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of -in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by hydraulic motor s/n 054081345. E-line measuring head assembly; measuring head grooved for -in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth. Current
- 36 (1) USED 2005 International Paystar Model 5900I 8x6 Tri-axle truck s/n 1HTXTAPT26J225893 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp (15,026-metered hours) unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with approximately 10-mm of tread & polished aluminum wheels with air - operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 -in dump bailers, 3 -in & 5 -in lubricators, Vanoil 5 -in R45 x 3000-psi flange, 3 -in x 3,000-psi BOP, 5 -in x 5,000-psi BOP w/ nace trim, Vanoil 4 -in x 5 -in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for -in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc. Current

Search ID#: Z10258622

- 37 (1) USED 2007 DynaWinch s/n 21681 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for -in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for -in line (approximately 800-ft line on), (2) 10-in sheaves grooved for -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting; mast s/n 21681. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of -in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of -in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for -in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter. Current
- 38 (1) USED 2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021; powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chocks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 -in dump bailers, 3 -in & 5 -in lubricators, Vanoil 5 -in R45 x 3000-psi flange, 3 -in x 3,000-psi BOP, 5 -in x 5,000-psi BOP w/ Nace trim, Vanoil 4 -in x 5 -in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for -in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc. Current

Search ID#: Z10258622

- 39 (1) USED 2012 DynaWinch s/n 33844 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 62-ft overall working height rated for 33,500-lb safe working load single line w/ guy lines, 67,000-lbs total mast static load. Mast is equipped w/ (1) 16-in sheave grooved for -in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for -in line (approximately 800-ft line on), (2) 10-in sheaves grooved for -in winch line, (2) twostage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility s/n 23844. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of -in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of -in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for -in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter. Current
- 40 (1) USED 2011 International Model Paystar tandemsteer tri-drive truck s/n 1HTXVAPT2BJ196710 ; powered by Cummins Model ISX600 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chucks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 -in dump bailers, 3 -in & 5 -in lubricators, Vanoil 5 -in R45 x 3000-psi flange, 3 -in x 3,000-psi BOP, 5 -in x 5,000-psi BOP w/ Nace trim, Vanoil 4 -in x 5 -in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for -in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc. Current

Search ID#: Z10258622

- 41 (1) USED 2013 International Paystar Model 5918x6 tridrive truck s/n 1HTNWSMT3DJ603273 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Jolly Engineering Services Model JES-300 mud pump; 5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 120. (1) 28-m 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long. Current
- 42 (1) USED 1996 Western Star Model tri drive truck s/n 2WLNCCFF0TK941183; powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Garder Denver Model TEE mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 precharge pump & control console. Pump is energized by drop box via truck PTO s/n 0010377. (1) 28-m 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Current
- 43 (1) USED 2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979 ; powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. s/n 1201. (1) 28-m 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Current

Search ID#: Z10258622

- 44 (1) USED 2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629; powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 1201. (1) 28-m 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Current
- 45 (1) USED 2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393; powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8 -ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc s/n 24058. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls s/n 1201. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 -in 2 -in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 -in dies, lot of rod tools including; rod hook, elevators, wrenches, etc. Current
- 46 (1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT1CJ603037; powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8 -ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 -in 2 -in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 -in dies, lot of rod tools. Current

Search ID#: Z10258622

- 47 (1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZTLCJ603037; powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Dynawinch BOP support deck; approximately 8 -ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 -in 2 -in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 -in dies, lot of rod tools. Current
- 48 (1) USED 2012 International Model 7500SBA6X4 single axle truck s/n 1HTWNAZT0CJ660216; powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Dynawinch BOP support deck; approximately 8 -ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc s/n 23797. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 -in 2 -in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 -in dies, lot of rod tools. Current
- 49 (1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT9CJ07869; powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Dynawinch BOP support deck; approximately 8 -ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 -in 2 -in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 -in dies, lot of rod tools. Current
- (1) USED 2006 Western Star Tri Drive truck s/n 1HTMKAAR87H407626. Spring-ride front axel mounted on steel wheels equipped w/ air-operated brakes. Air-ride rear axels mounted on steel wheels. Steel-constructed carrier deck. Engine; Cat Model 3406E diesel engine rated at 475-hp.

Search ID#: Z10258622

- | | | |
|----|--|---------------------------|
| 50 | All present and after-acquired personal property of the debtor. | Current By 14070313968 |
| 51 | (1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 2E9RSZ5Z96R073007. Tandemsteer front axels rated at 20,000-lb each, equipped w/polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. | Current By 14102024427 |

Particulars

| <u>Block</u> | <u>Other Changes</u> | <u>Status</u> |
|---------------------|--|---------------------------|
| 1 | The serial number in Block 5 of the General Collateral should read 2E9RSZ5Z96R073007. The serial number in Block 9 of the General Collateral should read 1CYEGW6837T047676. | Current By 14070313968 |

Search ID#: Z10258622

Business Debtor Search For:

MRBD LTD.

Search ID #: Z10258622

Date of Search: 2018-May-10

Time of Search: 09:45:05

Registration Number: 16051030866

Registration Type: SECURITY AGREEMENT

Registration Date: 2016-May-10

Registration Status: Current

Expiry Date: 2022-May-10 23:59:59

Exact Match on: Debtor

No: 1

Amendments to Registration

17022128078

Amendment

2017-Feb-21

Debtor(s)

Block

1 MRBD LTD.
46272 HWY 56
CAMROSE, AB T4V 1X4

Status

Current

Secured Party / Parties

Block

1 BDC CAPITAL INC.
BARCLAY CENTRE, 110, 444 - 7TH AVENUE SW
CALGARY, AB T2P 0X8

Status

Current

Collateral: Serial Number Goods

| <u>Block</u> | <u>Serial Number</u> | <u>Year</u> | <u>Make and Model</u> | <u>Category</u> | <u>Status</u> |
|---------------------|-----------------------------|--------------------|------------------------------|------------------------|----------------------|
| 1 | 1HTXVSJT8DJ146041 | 2013 | International Paystar 591 | MV - Motor Vehicle | Current |
| 2 | 1HTNWSMT3DJ603273 | 1996 | International Paystar 591 | MV - Motor Vehicle | Current |
| 3 | 1HTWNAZT5DJ304393 | 2013 | International 7500SBA6X4 | MV - Motor Vehicle | Current |
| 4 | 2C9HB46D812044028 | 2001 | ITB Doghouse | TR - Trailer | Current |
| 5 | 1HTXTAPT26J225893 | 2005 | International Paystar 590 | MV - Motor Vehicle | Current |
| 6 | 2WLNCCFF0TK941183 | 1996 | Western Star Tri-Drive | MV - Motor Vehicle | Current |

Search ID#: Z10258622


| | | | | | |
|----|-------------------|------|---------------------------|--------------------|---------------------------|
| 7 | 1HTWNAZTLCJ603037 | 2012 | International Paystar 750 | MV - Motor Vehicle | Current |
| 8 | 4220491008 | 2001 | Dog House | TR - Trailer | Current |
| 9 | 1HTXSAPT67J407021 | 2007 | International 56187X6 (SE | MV - Motor Vehicle | Current |
| 10 | 1HTXSAPT35J055979 | 2005 | International 56006X4 | MV - Motor Vehicle | Current |
| 11 | 1HTWAZT0CJ660216 | 2012 | International 7500SBA6X4 | MV - Motor Vehicle | Current |
| 12 | 4420491108 | 2002 | Dog House | TR - Trailer | Current |
| 13 | 1HTXVAPT2BJ196710 | 2011 | International Paystar 591 | MV - Motor Vehicle | Current |
| 14 | 5KKPALCK45PU76629 | 2005 | Western Star Tri-Drive | MV - Motor Vehicle | Current |
| 15 | 1HTWNAZT9CJ078969 | 2012 | International 7500SBA6X4 | MV - Motor Vehicle | Current |
| 16 | 4116487208 | 2001 | Dog House | TR - Trailer | Deleted By 17022128078 |
| 17 | 4116481208 | 2001 | Dog House | TR - Trailer | Current By 17022128078 |

Collateral: General

| <u>Block</u> | <u>Description</u> | <u>Status</u> |
|---------------------|--|----------------------|
| 1 | All present and after-acquired personal property and proceeds. | Current |

Result Complete

This is **Exhibit "Q"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

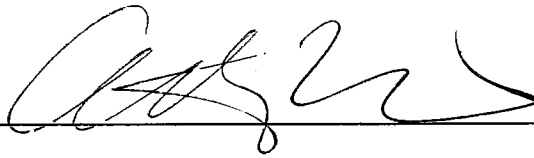

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

BC OnLine: PPRS SEARCH RESULT 2018/05/10
Lterm: XPSP0054 For: PA48772 GOWLING, LAFLEUR HENDERSON LLP 11:24:41

Attn./Ref. No.: A155881/K. DELURE

Index: BUSINESS DEBTOR

Search Criteria: MRBD LTD.

***** P P S A S E C U R I T Y A G R E E M E N T *****

Reg. Date: MAR 25, 2013 Reg. Length: 10 YEARS
Reg. Time: 06:55:19 Expiry Date: MAR 25, 2023
Base Reg. #: 254777H Control #: D1698213

Block#

S0001 Secured Party: GE CANADA EQUIPMENT FINANCING G.P.
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1

=D0001 Base Debtor: MRBD LTD.
(Business) #1110 - 910, 7TH AVENUE
CALGARY AB T2P 3N8

D0002 Bus. Debtor: MUSTANG WELL SERVICES LTD.
#1110 - 910, 7TH AVENUE
CALGARY AB T2P 3N8

Vehicle Collateral:

| Type | Serial # | Year | Make/Model | MH Reg.# |
|-------|----------|-------------------|-------------------------------|----------|
| V0001 | MV | 1HTXVSJT8DJ146041 | 2013 INTERNATIONAL 5918X6 | |
| V0002 | MV | 1HTXTAPT26J225893 | 2006 INTERNATIONAL 5900I | |
| V0003 | MV | 1HTXSAPT67J407021 | 2007 INTERNATIONAL 5618 | |
| V0004 | MV | 1HTXVAPT2BJ196710 | 2011 INTERNATIONAL 5918X6 | |
| V0005 | MV | 1HTNWSMT3DJ603273 | 2013 INTERNATIONAL 5918X6 | |
| V0006 | MV | 2WLNCCFF0TK941183 | 1996 WESTERN STAR TRIDRIVE | |
| V0007 | MV | 5KKPALCK45PU76629 | 2005 WESTERN STAR TRUCK | |
| V0008 | MV | 1HTXSAPT35J055979 | 2005 INTERNATIONAL 5600 | |
| V0009 | MV | 1HTWNAZT5DJ304393 | 2013 INTERNATIONAL 7500SBA6X4 | |
| V0010 | MV | 1HTWNAZTLCJ603037 | 2012 INTERNATIONAL 75006X4 | |
| V0011 | MV | 1HTMKAAR87H407626 | 2007 INTERNATIONAL 44006X4 | |
| V0012 | MV | 1HTWNAZT9CJ078969 | 2012 INTERNATIONAL 7500SBA6X4 | |
| V0013 | MV | 1HTMKAAR56H311306 | 2006 INTERNATIONAL 4400SBA4X2 | |
| V0014 | TR | 4220491208 | 2002 FABTEC MOBILE DOG HOUSE | |

General Collateral:

IR1:
2013 DYNWINCH LOG & SWAB UNIT W/ 52-FT MAST AND TANDEM DRUMS, MOUNTED ON INTERNATIONAL TRI-DRIVE: WIRELINE S/N 20856
2012 DYNWINCH MODEL CD3-323 RECORDER BODY 8-FT 6-IN WIDE X 8-FT 6-IN LONG CONSTRUCTED OF 100% ALUMINUM-STRUCTURE. RECORDER BODY IS EQUIPPED W/ CONTROL CONSOLE, LOCKING STORAGE CABINETS, LIGHT TABLE, 12-V & 120-V WIRING, INTERIOR & EXTERIOR LIGHTING, ROOF-MOUNTED AC/HEATING UNIT, BUS HEATER, ETC.
CSS DAS 2000 DATA ACQUISITION SYSTEM WITH RACK MOUNT CHASSIS AND PRINTREX PRINTER. SERVICE BODY 8-FT 6-IN WIDE X 18-FT 6-IN LONG

Search Criteria: MRBD LTD.

Page: 2

WITH TWO REAR HYDRAULIC STABILIZERS AND LOCKING STORAGE COMPARTMENTS, CLASS 1.1 B AND 1.4 S STORAGE MAGAZINES, HEADACHE RACK/CROWN STAND, REAR WORKING PLATFORM, (1) 10-KW HYDRAULIC GENERATOR WITH THERMAL EXCHANGER AND SWITCH GEAR.

MAST; TELESCOPING 52-FT 6-IN OVERALL WORKING HEIGHT RATED FOR 37,000-LBS W/ ?-IN DIAMETER LINE FOR SWABBING. MAST S/N 24030 MAST IS EQUIPPED W/ (1) 16-IN SHEAVE GROOVED FOR ?-IN E-LINE (APPROXIMATELY 4,800-M LINE ON), (2) TCP SHEAVES GROOVED FOR 3/8 IN LINE (APPROXIMATELY 800-FT LINE ON), (2) 10-IN SHEAVES GROOVED FOR 3/4 IN WINCH LINE, (2) TWO-STAGE MAST RAISING CYLINDERS, (2) MAST GUY LINES C/W MOUNTING FRAME, (2) 9,000-LB UTILITY WINCHES & LIGHTING. SINGLE-DRUM E-LINE DRAWWORKS; 42-IN FLANGE WITH CAPACITY FOR 6,000-M OF 3/4 IN BRAIDED LINE. DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK BEARINGS, & IEC SLIP RING. DRAWWORKS IS ENERGIZED BY 2-SPEED PLANETARY GEAR BOX UNITIZED WITH SAUER HYDRAULIC MOTOR.

SINGLE-DRUM TCP DRAWWORKS; 29-IN FLANGE WITH CAPACITY FOR 250-M OF 3/4-IN WIRE ROPE. DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK BEARINGS, CONTROL CONSOLE (LOCATED AT REAR OF UNIT) & WEIGHT INDICATOR. DRAWWORKS IS ENERGIZED BY 2-SPEED PLANETARY GEAR BOX UNITIZED WITH SAUER 3-SPEED HYDRAULIC MOTOR. E-LINE MEASURING HEAD ASSEMBLY; MEASURING HEAD GROOVED FOR ?-IN E-LINE C/W ENCODERS & V-ROLLER GUIDE ASSEMBLY (SIDE-TO-SIDE MOVEMENT), LOAD CELL & ELECTRONIC DEPTH COUNTER.

2013 INTERNATIONAL PAYSTAR MODEL 5918X6 TRI-DRIVE TRUCK

VIN-1HTXVSJT8DJ146041

POWERED BY CUMMINS MODEL A 475 DIESEL ENGINE RATED AT 475-HP @ 1,700-HP UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL TRANSMISSION. TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES UNITIZED TO 20,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 445/65R22.5 TIRES WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. TRI-DRIVE REAR AXLES RATED AT 54,000 LBS ARE EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R24.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...

LOT OF SUPPORT EQUIPMENT INCLUDING; MCKISSICK 35-TON TRAVELING BLOCK, CASING SWAB MANDREL, BAKER 10 & 20 SETTING TOOLS, (4) 3 1/2-IN DUMP BAILERS, 3 1/2-IN & 5 1/2-IN LUBRICATORS, VANOIL 5 1/2-IN R45 X 3000-PSI FLANGE, 3 1/2-IN X 3,000-PSI BOP, 5 1/2-IN X 5,000-PSI BOP W/ NACE TRIM, VANOIL 4 1/2-IN X 5 1/2-IN X 3,000-PSI FLOTEE, SET OF CSS BOW SPRING LOGGING CENTRALIZERS, CSS MULTIPLEX BOND LOG TOOL, GAMMA TOOL, SINKER BAR, COLLAR LOCATORS, OIL SAVER W/ PUMP & RUBBERS, SUBS, TYPE 4 & 6 MAGAZINES, (3) 17-IN SHEAVE WHEELS GROOVED FOR ?-IN LINE, CCL ASSEMBLY W/ JUNK BASKET & GAUGE RING NOISE TEMP, WIRE LINE TOOLS, (1) LAPTOP, 8-KW HYDRAULICALLY - POWERED GENERATOR, HAND TOOLS ETC.

IR2:

2005 DYNAWINCH LOG & SWAB UNIT W/ 52-FT MAST AND TANDEM DRUMS,

MOUNTED ON INTERNATIONAL TRI-DRIVE.
WIRELINE S/N 21270 S/N GEN - X07K433250
2005 DYNAWINCH MODEL CD3-323 RECORDER BODY 8-FT 6-IN WIDE X 8-FT 6-IN
LONG CONSTRUCTED OF 100% ALUMINUM-STRUCTURE. RECORDER BODY IS

Continued on Page 3

Search Criteria: MRBD LTD.

Page: 3

EQUIPPED W/ CONTROL CONSOLE, LOCKING STORAGE CABINETS, LIGHT TABLE,
12-V & 120-V WIRING, INTERIOR & EXTERIOR LIGHTING, ROOF-MOUNTED
AC/HEATING UNIT, BUS HEATER, ETC.
CSS DAS 2000 DATA ACQUISITION SYSTEM WITH RACK MOUNT CHASSIS AND
PRINTER 840 DL PRINTER. SERVICE BODY 8-FT 6-IN WIDE X 18-FT 6-IN LONG
WITH TWO REAR HYDRAULIC STABILIZERS AND LOCKING STORAGE COMPARTMENTS,
CLASS 1.1 B AND 1.4 S STORAGE MAGAZINES, HEADACHE RACK/CROWN STAND,
REAR WORKING PLATFORM, (1) 10-KW HYDRAULIC GENERATOR WITH THERMAL
EXCHANGER AND SWITCH GEAR.

MAST; TELESCOPING 52-FT 6-IN OVERALL WORKING HEIGHT RATED FOR
37,000-LBS W/ 3/8 -IN DIAMETER LINE FOR SWABBING. MAST S/N 21270
MAST IS EQUIPPED W/ (1) 16-IN SHEAVE GROOVED FOR 3/8 IN E-LINE
(APPROXIMATELY 4,800-M LINE ON), (2) TCP SHEAVES GROOVED FOR 3/4-IN
LINE (APPROXIMATELY 800-FT LINE ON), (2) 10-IN SHEAVES GROOVED FOR 3/8
IN WINCH LINE, (2) TWO-STAGE MAST RAISING CYLINDERS, (2) MAST GUY
LINES C/W MOUNTING FRAME, (2) 9,000-LB UTILITY WINCHES & LIGHTING.
SINGLE-DRUM E-LINE DRAWWORKS; 42-IN FLANGE WITH CAPACITY FOR 6,000-M
OF 3/8 IN BRAIDED LINE DW MOTOR S/N 054381889
DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK
BEARINGS, & IEC SLIP RING. DRAWWORKS IS ENERGIZED BY 2-SPEED PLANETARY
GEAR BOX UNITIZED WITH SAUER HYDRAULIC MOTOR.
SINGLE-DRUM TCP DRAWWORKS; 29-IN FLANGE WITH CAPACITY FOR 250-M
OF 3/4-IN WIRE ROPE DW MOTOR S/N 054081345
DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK
BEARINGS, CONTROL CONSOLE (LOCATED AT REAR OF UNIT) & WEIGHT
INDICATOR. DRAWWORKS IS ENERGIZED BY 2- SPEED PLANETARY GEAR BOX
UNITIZED WITH SAUER 2- SPEED HYDRAULIC MOTOR.
E-LINE MEASURING HEAD ASSEMBLY; MEASURING HEAD GROOVED FOR ?-IN
E-LINE C/W ENCODERS & V-ROLLER GUIDE ASSEMBLY (SIDE-TO-SIDE MOVEMENT),
LOAD CELL & ELECTRONIC DEPTH COUNTER.

2006 INTERNATIONAL PAYSTAR MODEL 5900I 8X6 TRI-DRIVE TRUCK
S/N 1HTXTAPT26J225893
POWERED BY CUMMINS MODEL ISX 450 DIESEL ENGINE RATED AT 450-HP
& 2,000-RPM UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL
TRANSMISSION. TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES
UNITIZED TO 20,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 445/65R22.5
TIRES WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. TRI-DRIVE
REAR AXLES RATED AT 52,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION
MOUNTED ON 11R24.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR - OPERATED
BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT,
AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...
LOT OF SUPPORT EQUIPMENT INCLUDING; MCKISSICK 35-TON TRAVELING BLOCK,
CASING SWAB MANDREL, BAKER 10 & 20 SETTING TOOLS, (4) 3 1/2-IN DUMP

BAILERS, 3 1/2-IN & 5 1/2-IN LUBRICATORS, VANOIL 5 1/2-IN R45 X 3000-PSI FLANGE, 3 1/2-IN X 3,000-PSI BOP, 5 1/2-IN X 5,000-PSI BOP W/ NACE TRIM, VANOIL 4 1/2-IN X 5 1/2-IN X 3,000-PSI FLOTTEE, SET OF CSS BOW SPRING LOGGING CENTRALIZERS, CSS MULTIPLEX BOND LOG TOOL, GAMMA TOOL, SINKER BAR, COLLAR LOCATORS, OIL SAVER W/ PUMP & RUBBERS, SUBS, TYPE 4 & 6 MAGAZINES, (3) 17-IN SHEAVE WHEELS GROOVED FOR 3/8 IN LINE, CCL ASSEMBLY W/ JUNK BASKET & GAUGE RING NOISE TEMP, WIRE LINE TOOLS, (1) LAPTOP, 8-KW HYDRAULICALLY - POWERED GENERATOR, HAND TOOLS ETC.

Continued on Page 4

Search Criteria: MRBD LTD.

Page: 4

IR3:

2007 DYNWINCH LOG & SWAB UNIT W/ 52-FT MAST AND TANDEM DRUMS, MOUNTED ON INTERNATIONAL TRI-DRIVE
2007 DYNWINCH RECORDER BODY 8-FT 6-IN WIDE X 8-FT 6-IN LONG CONSTRUCTED OF 100% ALUMINUM-STRUCTURE. RECORDER BODY IS EQUIPPED W/ CONTROL CONSOLE, LOCKING STORAGE CABINETS, LIGHT TABLE, 12-V & 120-V WIRING, INTERIOR & EXTERIOR LIGHTING, ROOF-MOUNTED AC/HEATING UNIT, BUS HEATER, ETC.
CSS DAS 2000 DATA ACQUISITION SYSTEM WITH RACK MOUNT CHASSIS AND PRINTER 840 DL PRINTER. SERVICE BODY 8-FT 6-IN WIDE X 18-FT 6-IN LONG WITH TWO REAR HYDRAULIC STABILIZERS AND LOCKING STORAGE COMPARTMENTS, CLASS 1.1 B AND 1.4 S STORAGE MAGAZINES, HEADACHE RACK/CROWN STAND, REAR WORKING PLATFORM, (1) 10-KW HYDRAULIC GENERATOR WITH THERMAL EXCHANGER AND SWITCH GEAR.
MAST; TELESCOPING 52-FT 6-IN OVERALL WORKING HEIGHT RATED FOR 37,000-LBS W/ 3/8 -IN DIAMETER LINE FOR SWABBING. MAST IS EQUIPPED W/ (1) 16-IN SHEAVE GROOVED FOR 3/8 IN E-LINE (APPROXIMATELY 2800-M LINE ON), (2) TCP SHEAVES GROOVED FOR 3/4-IN LINE (APPROXIMATELY 800-FT LINE ON), (2) 10-IN SHEAVES GROOVED FOR 3/8 -IN WINCH LINE, (2) TWO-STAGE MAST RAISING CYLINDERS, (2) MAST GUY LINES C/W MOUNTING FRAME, (2) 9,000-LB UTILITY WINCHES & LIGHTING. SINGLE-DRUM E-LINE DRAWWORKS; 42-IN FLANGE WITH CAPACITY FOR 6,000-M OF ?-IN BRAIDED LINE. DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK BEARINGS, & IEC SLIP RING. DRAWWORKS IS ENERGIZED BY 2-SPEED PLANETARY GEAR BOX UNITIZED WITH SAUER HYDRAULIC MOTOR.
SINGLE-DRUM TCP DRAWWORKS; 29-IN FLANGE WITH CAPACITY FOR 250-M OF 3/4-IN WIRE ROPE. DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK BEARINGS, CONTROL CONSOLE (LOCATED AT REAR OF UNIT) & WEIGHT INDICATOR. DRAWWORKS IS ENERGIZED BY 2-SPEED PLANETARY GEAR BOX UNITIZED WITH SAUER 2-SPEED HYDRAULIC MOTOR.
E-LINE MEASURING HEAD ASSEMBLY; MEASURING HEAD GROOVED FOR ?-IN E-LINE C/W ENCODERS & V-ROLLER GUIDE ASSEMBLY (SIDE-TO-SIDE MOVEMENT), LOAD CELL & ELECTRONIC DEPTH COUNTER.

2007 INTERNATIONAL MODEL 5618 7X6 TRI-AXLE TRUCK
S/N 1HTXSAPT67J407021
POWERED BY CUMMINS MODEL ISX475 DIESEL ENGINE RATED AT 475-HP
UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL TRANSMISSION.
TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES UNITIZED TO

23,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 445/65R22.5 TIRES WITH POLISHED ALUMINUM WHEELS & AIR - OPERATED BRAKES. TRIDEM REAR AXLES RATED AT 53,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R24.5 TIRES W/ POLISHED ALUMINUM WHEELS. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AND PASSENGER RIDE AIR SEATS, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...
LOT OF SUPPORT EQUIPMENT INCLUDING; MCKISSICK 35-TON TRAVELING BLOCK, CASING SWAB MANDREL, BAKER 10 & 20 SETTING TOOLS, (4) 3 1/2-IN DUMP BAILERS, 3 1/2-IN & 5 1/2-IN LUBRICATORS, VANOIL 5 1/2-IN R45 X 3000-PSI FLANGE, 3 1/2-IN X 3,000-PSI BOP, 5 1/2-IN X 5,000-PSI BOP W/ NACE TRIM, VANOIL 4 1/2-IN X 5 1/2-IN X 3,000-PSI FLOTEE, SET OF CSS BOW SPRING LOGGING CENTRALIZERS, CSS MULTIPLEX BOND LOG TOOL, GAMMA TOOL, SINKER BAR, COLLAR LOCATORS, OIL SAVER W/ PUMP & RUBBERS, SUBS, TYPE 4 & 6 MAGAZINES, (3) 17-IN SHEAVE WHEELS GROOVED FOR 3/8 IN LINE, CCL ASSEMBLY W/ JUNK BASKET & GAUGE RING NOISE TEMP, WIRE LINE TOOLS, (1) LAPTOP, 8-KW HYDRAULICALLY - POWERED GENERATOR, HAND TOOLS ETC.

Continued on Page 5

Search Criteria: MRBD LTD.

Page: 5

IR4:

2011 DYNAWINCH LOG & SWAB UNIT W/ 62-FT HD MAST AND TANDEM DRUMS, MOUNTED ON INTERNATIONAL TRI-DRIVE, WIRELINE S/N 23844

2011 DYNAWINCH RECORDER BODY 8-FT 6-IN WIDE X 8-FT 6-IN LONG CONSTRUCTED OF 100% ALUMINUM-STRUCTURE. RECORDER BODY IS EQUIPPED W/ CONTROL CONSOLE, LOCKING STORAGE CABINETS, LIGHT TABLE, 12-V & 120-V WIRING, INTERIOR & EXTERIOR LIGHTING, ROOF-MOUNTED AC/HEATING UNIT, BUS HEATER, ETC.

CSS DAS 2000 DATA ACQUISITION SYSTEM WITH RACK MOUNT CHASSIS AND PRINTER 840 DL PRINTER. SERVICE BODY 8-FT 6-IN WIDE X 18-FT 6-IN LONG WITH TWO REAR HYDRAULIC STABILIZERS AND LOCKING STORAGE COMPARTMENTS, CLASS 1.1 B AND 1.4 S STORAGE MAGAZINES, HEADACHE RACK/CROWN STAND, REAR WORKING PLATFORM, (1) 10-KW HYDRAULIC GENERATOR WITH THERMAL EXCHANGER AND SWITCH GEAR.

DYNAWINCH MODEL CD2-3-260HD TELESCOPING MAST S/N 23844
62-FT 6-IN OVERALL WORKING HEIGHT RATED FOR 33,500-LBS W/ 3/8 IN DIAMETER LINE FOR SWABBING. MAST IS EQUIPPED W/ (1) 16-IN SHEAVE GROOVED FOR 3/8 IN E-LINE (APPROXIMATELY 2800-M LINE ON), (2) TCP SHEAVES GROOVED FOR 3/4-IN LINE (APPROXIMATELY 800-FT LINE ON), (2) 10-IN SHEAVES GROOVED FOR 3/8 IN WINCH LINE, (2) TWO-STAGE MAST RAISING CYLINDERS, (2) MAST GUY LINES C/W MOUNTING FRAME, (2) 9,000-LB UTILITY WINCHES & LIGHTING.

SINGLE-DRUM E-LINE DRAWWORKS; 42-IN FLANGE WITH CAPACITY FOR 6,000-M OF 3/8 IN BRAIDED LINE. DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK BEARINGS, & IEC SLIP RING. DRAWWORKS IS ENERGIZED BY 2-SPEED PLANETARY GEAR BOX UNITIZED WITH SAUER HYDRAULIC MOTOR.

SINGLE-DRUM TCP DRAWWORKS; 29-IN FLANGE WITH CAPACITY FOR 250-M OF 3/4-IN WIRE ROPE. DRAWWORKS IS EQUIPPED WITH PNEUMATIC BRAKES, HEAVY-DUTY PILLOW BLOCK BEARINGS, CONTROL CONSOLE (LOCATED AT REAR OF UNIT) & WEIGHT INDICATOR. DRAWWORKS IS ENERGIZED BY 2-SPEED PLANETARY GEAR BOX UNITIZED WITH SAUER 2-SPEED HYDRAULIC MOTOR.

E-LINE MEASURING HEAD ASSEMBLY; MEASURING HEAD GROOVED FOR 3/8 IN E-LINE C/W ENCODERS & V-ROLLER GUIDE ASSEMBLY (SIDE-TO-SIDE MOVEMENT), LOAD CELL & ELECTRONIC DEPTH COUNTER.

2011 INTERNATIONAL PAYSTAR MODEL 5918X6 TRI-AXLE TRUCK
S/N 1HTXVAPT2BJ196710
POWERED BY CUMMINS MODEL ISX 600 DIESEL ENGINE RATED AT 600-HP @ 1,700-RPM UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL TRANSMISSION. TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES UNITIZED TO TANDEM 20,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 445/65R22.5 TIRES WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. TRIDEM REAR AXLES RATED AT 52,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R24.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR - OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...
LOT OF SUPPORT EQUIPMENT INCLUDING; MCKISSICK 35-TON TRAVELING BLOCK, CASING SWAB MANDREL, BAKER 10 & 20 SETTING TOOLS, (4) 3 1/2-IN DUMP BAILERS, 3 1/2-IN & 5 1/2-IN LUBRICATORS, VANOIL 5 1/2-IN R45 X 3000-PSI FLANGE, 3 1/2-IN X 3,000-PSI BOP, 5 1/2-IN X 5,000-PSI BOP W/ NACE TRIM, VANOIL 4 1/2-IN X 5 1/2-IN X 3,000-PSI FLOTTEE, SET OF CSS BOW SPRING LOGGING CENTRALIZERS, CSS MULTIPLEX BOND LOG TOOL, GAMMA TOOL, SINKER BAR, COLLAR LOCATORS, OIL SAVER W/ PUMP & RUBBERS, SUBS,

Continued on Page 6

Search Criteria: MRBD LTD.

Page: 6

TYPE 4 & 6 MAGAZINES, (3) 17-IN SHEAVE WHEELS GROOVED FOR ?-IN LINE, CCL ASSEMBLY W/ JUNK BASKET & GAUGE RING NOISE TEMP, WIRE LINE TOOLS, (1) LAPTOP, 8-KW HYDRAULICALLY - POWERED GENERATOR, HAND TOOLS ETC.

IR1 PT:

2013 INTERNATIONAL PUMP TRUCK W/ JOLLY PUMP & TANK:
2013 INTERNATIONAL PAYSTAR MODEL 5918X6 TRI-DRIVE TRUCK
S/N 1HTNWSMT3DJ603273
POWERED BY CUMMINS MODEL ISX 450 DIESEL ENGINE RATED AT 450-HP UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL TRANSMISSION. TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES UNITIZED TO 20,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 425/65R22.5 TIRES WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. TRIDEM REAR AXLES RATED AT 52,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R24.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR - OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...
TRUCK IS EQUIPPED WITH STEEL-CONSTRUCTED WOOD PLANK DECKED; 8-FT 6-IN WIDE X 20-FT LONG C/W LIVE ROLL & TULSA MODEL 08C6 WINCH, 20,000-LB PULLRATING & JUNK BASKET WITH ELBOWS, CHICK SANS ETC ...
JOLLY ENGINEERING SERVICES MODEL JES-300 MUD PUMP S/N 1201
5-IN X 6-IN X 5,000-PSI RATED AT 160-HP C/W STANDARD HEADS, PULSATION CHAMBER, OTECO PRESSURE VALVE, 2-IN RELIEF VALVE, 5-VALVE 2-IN X 3000 PSI MANIFOLD, BOWIE MODEL 33 PRE-CHARGE PUMP & CONTROL CONSOLE. PUMP IS ENERGIZED BY DROP BOX VIA TRUCK PTO. PICK-UP SLINGS. LOT OF ROD CHASER, TUBING DRIPTS, ROD TRANSFERS. LOT OF PUP JOINTS, 60-MM & 73-MM. (1) 28-M (CUBIC) 2 SECTION TANK WITH; DEGASSER, (2) GUNS, (2)

GATE VALVES, TELESCOPIC LIGHTING, (20) 2-IN JOINTS LINE PIPE X 3000-PSI, 30-FT 4-IN X 150-PSI SUCTION HOSE, (1) 30-FT AND (1) 40-FT KELLY HOSE X 3625-PSI. TANK C/W TRIPOD MAN LIFT WITH MANUAL WINCH. TANK IS MOUNTED ON 8-FT 6-IN WIDE 20-FT LONG

IR2 PT:

1996 WESTERN STAR PUMP TRUCK W/ EMPIRE PUMP & TANK:
1996 WESTERN STAR MODEL TRIDRIVE TRUCK S/N 2WLNCCFF0TK941183
POWERED BY A DIESEL ENGINE RATED AT APPROXIMATELY 450-HP UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL TRANSMISSION. TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES UNITIZED TO 20,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 445/65R22.5 TIRES WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. TRIDEM REAR AXLES RATED AT 52,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R24.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR - OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...
TRUCK IS EQUIPPED WITH STEEL-CONSTRUCTED WOOD PLANK DECKED; 8-FT 6-IN WIDE X 20-FT LONG C/W LIVE ROLL & TULSA MODEL 08C6 WINCH, 20,000-LB PULL RATING & JUNK BASKET WITH ELBOWS, CHICK SANS ETC ...
EMPIRE MODEL E-300 MUD PUMP; 4-IN X 5-IN C/W STANDARD HEADS, PULSATION CHAMBER, OTECO PRESSURE VALVE, 2-IN RELIEF VALVE, 5-VALVE 2-IN X 3000 PSI MANIFOLD, BOWIE MODEL 33 PRE-CHARGE PUMP & CONTROL CONSOLE. PUMP IS ENERGIZED BY DROP BOX VIA TRUCK PTO. (1) 28-M(CUBIC) 2 SECTION TANK WITH; DEGASSER, (2) GUNS, (2) GATE VALVES, TELESCOPIC LIGHTING, (20) 2-IN JOINTS LINE PIPE X 3000 PSI, 30-FT 4-IN X 150 PSI SUCTION HOSE, (1) 30-FT AND (1) 40FT KELLY HOSE X 3625 PSI. TANK C/W TRIPOD MAN LIFT WITH MANUAL WINCH. TANK IS MOUNTED ON 8-FT 6-IN WIDE 20-FT

Continued on Page 7

Search Criteria: MRBD LTD.

Page: 7

LONG

IR3 PT:

2005 WESTERN STAR PUMP TRUCK W/ EMPIRE PUMP & TANK:
2005 WESTERN STAR TRI-DRIVE TRUCK S/N 5KKPALCK45PU76629
POWERED BY DETROIT SERIES 60 DIESEL ENGINE RATED AT APPROXIMATELY 450-HP UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL TRANSMISSION. TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES UNITIZED TO 20,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 445/65R22.5 TIRES WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. TRI-DRIVE REAR AXLES RATED AT 52,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R24.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR - OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...
TRUCK IS EQUIPPED WITH STEEL-CONSTRUCTED WOOD PLANK DECK; 8-FT 6-IN WIDE X 20-FT LONG C/W LIVE ROLL & TULSA MODEL 08C6 WINCH, 20,000-LB PULL RATING & JUNK BASKET WITH ELBOWS, CHICK SANS ETC ...
EMPIRE MODEL E-300 MUD PUMP S/N LT01-2008-009
4-IN X 5-IN C/W STANDARD HEADS, PULSATION CHAMBER, OTECO PRESSURE VALVE, 2-IN RELIEF VALVE, 5-VALVE 2-IN X 3000 PSI MANIFOLD, BOWIE MODEL 33 PRE-CHARGE PUMP & CONTROL CONSOLE. PUMP IS ENERGIZED BY DROP

BOX VIA TRUCK PTO.

(1) 28-M(CUBIC) 2 SECTION TANK WITH; DEGASSER, (2) GUNS, (2) GATE VALVES, TELESCOPIC LIGHTING, (20) 2-IN JOINTS LINE PIPE X 3000 PSI, 30-FT 4-IN X 150 PSI SUCTION HOSE, (1) 30-FT AND (1) 40FT KELLY HOSE X 3625 PSI. TANK C/W TRIPOD MAN LIFT WITH MANUAL WINCH. TANK IS MOUNTED ON 8-FT 6-IN WIDE 20-FT LONG

IR4 PT:

2005 INTERNATIONAL PUMP TRUCK W/ GARDNER DENVER PUMP W/ TANK:
2005 INTERNATIONAL MODEL 5600 6X4 TRI-DRIVE TRUCK S/N
1HTXSAPT35J055979

POWERED BY CUMMINS DIESEL ENGINE RATED AT APPRIXIMATELY 450-HP UNITIZED WITH EATON MODEL RTLO16918B 18-SPEED MANUAL TRANSMISSION. TRUCK IS EQUIPPED WITH; DUAL POWER STEERING BOXES UNITIZED TO 20,000-LB SPRING-RIDE FRONT AXLES MOUNTED ON 445/65R22.5 TIRES WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. TRIDEM REAR AXLES RATED AT 52,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R24.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR - OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC..

TRUCK IS EQUIPPED WITH STEEL-CONSTRUCTED WOOD PLANK DECKED; 8-FT 6-IN WIDE X 20-FT LONG C/W LIVE ROLL & TULSA MODEL 08C6 WINCH, 20,000-LB PULL RATING & JUNK BASKET WITH ELBOWS, CHICK SANS ETC ... EMPIRE MODEL E-300 MUD PUMP; 4-IN X 5-IN C/W STANDARD HEADS, PULSATION CHAMBER, OTECO PRESSURE VALVE, 2-IN RELIEF VALVE, 5-VALVE 2-INX 3000 PSI MANIFOLD, BOWIE MODEL 33 PRE-CHARGE PUMP & CONTROL CONSOLE. PUMP IS ENERGIZED BY DROP BOX VIA TRUCK PTO.

(1) 28-M(CUBIC) 2 SECTION TANK WITH; DEGASSER, (2) GUNS, (2) GATE VALVES, TELESCOPIC LIGHTING, (20) 2-IN JOINTS LINE PIPE X 3000 PSI, 30-FT 4-IN X 150 PSI SUCTION HOSE, (1) 30-FT AND (1) 40FT KELLY HOSE X 3625 PSI. TANK C/W TRIPOD MAN LIFT WITH MANUAL WINCH. TANK IS MOUNTED ON 8-FT 6-IN WIDE 20-FT LONG.

ET 01:

Continued on Page 8

Search Criteria: MRBD LTD.

Page: 8

2013 INTERNATIONAL TRUCK W/ DYNAWINCH BOP SUPPORT DECK:
2013 INTERNATIONAL MODEL 7500SBA6X4 SINGLE-AXLE TRUCK S/N
1HTWNAZT5DJ304393

POWERED BY MAXXFORCE MODEL GDT 350 DIESEL ENGINE RATED AT 350-HP @ 2,000-RPM UNITIZED WITH ALLISION MODEL 3000RDS AUTOMATIC 6-SPEED TRANSMISSION. TRUCK IS EQUIPPED WITH; 16,000-LB FRONT AXLE MOUNTED ON 315/80R22.5 TIRES WITH PAINTED STEEL WHEELS AND AIR-OPERATED BRAKES. REAR AXLE RATED AT 20,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R22.5 TIRES W/ PAINTED STEEL WHEELS AND AIR-OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...

DYNAWINCH BOP SUPPORT DECK; APPROXIMATELY 8 1/2-FT WIDE X 22-FT LONG S/N 24058 W/ BOP STUMP C/W WARN POSITIONING WINCH, TUBULAR WALL RACKS, CHIC-SAN HANGERS, CAGED JUNK BASKETS, CUSTOM LOCKING CABINETY, HEAD ACHE RACK, ALUMINUM STAIRWELL, LIGHTING ETC.

TRAVELING & RIG FLOOR EQUIPMENT - MCKISSICK FIG 83AWT-24,
100-TON TRAVELING BLOCK ASSEMBLY S/N 06-349-24
W/ (3) 24-IN SHEAVES GROOVED FOR 1-IN LINE. (1) GILL MODEL 500
HYDRAULIC POWER TUBING TONGS S/N 500-1147.. SET X 1-3/4-IN X 72-IN
WELD LESS ELEVATOR LINKS, 150-TON CAPACITY. CANGLOBAL MODEL CLIPPER
WEIGHT INDICATOR, 0- 90,000-DAN, CALIBRATED TO 62,000-DAN. CAVINS
DEPTHOMETER FOR 14.28-MM SANDLINE.
ELECTRIC OVER HYDRAULIC 3,000-PSI CLASS II ACCUMULATOR SYSTEM EQUIPPED
W/ 45-GAL RESERVOIR, NITROGEN BACK-UP, HOSE REELS, DIRECT & REMOTE
(RIG-MOUNTED) CONTROLS.
LOT OF SUPPORT EQUIPMENT INCLUDING; GUIBBERSON TYPE 1 AIR SLIPS,
MISSION LOW-LIE SLIPS, TUBING ELEVATORS (2 3/8 IN 2 7/8 IN INSERTS),
WEB WILSON 2-IN DIA X 53-TONS BAILS, TEDA (CHINESE) MODEL XYQ6B POWER
TONGS C/W 2-IN 3 1/2 -IN DIES, LOT OF ROD TOOLS INCLUDING; ROD
HOOK, ELEVATORS, WRENCHES, ETC.

ET 02:

2012 INTERNATIONAL TRUCK W/ DYNWINCH BOP SUPPORT DECK:
2012 INTERNATIONAL PAYSTAR MODEL 75006X4 TANDEM-AXLE TRUCK S/N
1HTWNAZTLCJ603037
POWERED BY MAXXFORCE MODEL GDT 350 DIESEL ENGINE RATED AT 350-HP @
2,000-RPM UNITIZED WITH ALLISION MODEL 3000RDS AUTOMATIC 6-SPEED
TRANSMISSION. TRUCK IS EQUIPPED WITH; 16,000-LB FRONT AXLE MOUNTED ON
315/80R22.5 TIRES WITH PAINTED STEEL WHEELS AND AIR-OPERATED BRAKES.
REAR AXLE RATED AT 20,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION
MOUNTED ON 11R22.5 TIRES W/ PAINTED STEEL WHEELS AND AIR-OPERATED
BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND
MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...
DYNWINCH BOP SUPPORT DECK; APPROXIMATELY 8 1/2-FT WIDE X 22-FT LONG
W/ BOP STUMP C/W WARN POSITIONING WINCH, TUBULAR WALL RACKS, CHIC-
SAN HANGERS, CAGED JUNK BASKETS, CUSTOM LOCKING CABINERY, HEAD ACHE
RACK, ALUMINUM STAIRWELL, LIGHTING ETC.
ELECTRIC OVER HYDRAULIC 3,000-PSI CLASS II ACCUMULATOR SYSTEM EQUIPPED
W/ 45-GAL RESERVOIR, NITROGEN BACK-UP, HOSE REELS, DIRECT & REMOTE
(RIG-MOUNTED) CONTROLS.
LOT OF SUPPORT EQUIPMENT INCLUDING; GUIBBERSON TYPE 1 AIR SLIPS,
MISSION LOW-LIE SLIPS, TUBING ELEVATORS (2 3/8 -IN 2 7/8 IN INSERTS),
WEB WILSON 2-IN DIA X 53-TONS BAILS, TEDA (CHINESE) MODEL XYQ6B POWER
TONGS C/W 2-IN 3 1/2-IN DIES, LOT OF ROD TOOLS INCLUDING; ROD
HOOK, ELEVATORS, WRENCHES, ETC..

Continued on Page 9

Search Criteria: MRBD LTD.

Page: 9

ET 03:

2007 INTERNATIONAL TRUCK W/ DYNWINCH BOP SUPPORT DECK:
2007 INTERNATIONAL PAYSTAR MODEL 44006X4 SINGLE-AXLE TRUCK S/N
1HTMKAAR87H407626
POWERED BY INTERNATIONAL MODEL DT466 DIESEL ENGINE RATED AT 285-HP
UNITIZED WITH EATON FULLER MODEL FR9210 10-SPEED MANUAL TRANSMISSION.
TRUCK IS EQUIPPED WITH; 12,000-LB FRONT AXLES MOUNTED ON 11R22.5 TIRES
WITH POLISHED ALUMINUM WHEELS AND AIR-OPERATED BRAKES. REAR AXLE RATED

AT 23,000-LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R22.5 TIRES, POLISHED ALUMINUM WHEELS AND AIR - OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC... DYNAWINCH BOP SUPPORT DECK; APPROXIMATELY 8 1/2-FT WIDE X 22-FT LONG W/ BOP STUMP C/W WARN POSITIONING WINCH, TUBULAR WALL RACKS, CHIC-SAN HANGERS, CAGED JUNK BASKETS, CUSTOM LOCKING CABINETY, HEAD ACHE RACK, ALUMINUM STAIRWELL, LIGHTING ETC. ELECTRIC OVER HYDRAULIC 3,000-PSI CLASS II ACCUMULATOR SYSTEM EQUIPPED W/ 45-GAL RESERVOIR, NITROGEN BACK-UP, HOSE REELS, DIRECT & REMOTE (RIG-MOUNTED) CONTROLS. LOT OF SUPPORT EQUIPMENT INCLUDING; GUIBBERSON TYPE 1 AIR SLIPS, MISSION LOW-LIE SLIPS, TUBING ELEVATORS (2 3/8 IN 2 7/8 IN INSERTS), WEB WILSON 2-IN DIA X 53-TONS BAILS, TEDA (CHINESE) MODEL XYQ6B POWER TONGS C/W 2-IN 3 1/2-IN DIES, LOT OF ROD TOOLS INCLUDING; ROD HOOK, ELEVATORS, WRENCHES, ETC...

ET 04:

2012 INTERNATIONAL TRUCK W/ DYNAWINCH BOP SUPPORT DECK:
2012 INTERNATIONAL MODEL 7500SBA6X4 TANDEM-AXLE TRUCK S/N 1HTWNAZT9CJ078969
POWERED BY MAXXFORCE MODEL GDT 350 DIESEL ENGINE RATED AT 350-HP @ 2,000-RPM UNITIZED WITH ALLISION AUTOMATIC TRANSMISSION. TRUCK IS EQUIPPED WITH; 16,000-LB FRONT AXLE MOUNTED ON 315/80R22.5 TIRES WITH PAINTED STEEL WHEELS AND AIR-OPERATED BRAKES. REAR AXLE RATED AT 20,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R22.5 TIRES W/ PAINTED STEEL WHEELS AND AIR-OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC... DYNAWINCH BOP SUPPORT DECK; APPROXIMATELY 8 1/2-FT WIDE X 22-FT LONG W/ BOP STUMP C/W WARN POSITIONING WINCH, TUBULAR WALL RACKS, CHIC-SAN HANGERS, CAGED JUNK BASKETS, CUSTOM LOCKING CABINETY, HEAD ACHE RACK, ALUMINUM STAIRWELL, LIGHTING ETC. ELECTRIC OVER HYDRAULIC 3,000-PSI CLASS II ACCUMULATOR SYSTEM EQUIPPED W/ 45-GAL RESERVOIR, NITROGEN BACK-UP, HOSE REELS, DIRECT & REMOTE (RIG-MOUNTED) CONTROLS. LOT OF SUPPORT EQUIPMENT INCLUDING; GUIBBERSON TYPE 1 AIR SLIPS, MISSION LOW-LIE SLIPS, TUBING ELEVATORS (2 3/8 IN 2 7/8 IN INSERTS), WEB WILSON 2-IN DIA X 53-TONS BAILS, TEDA (CHINESE) MODEL XYQ6B POWER TONGS C/W 2-IN 3 1/2-IN DIES, LOT OF ROD TOOLS INCLUDING; ROD HOOK, ELEVATORS, WRENCHES, ETC...

IR CT - 2006 INTERNATIONAL CEMENT TRUCK:

2006 INTERNATIONAL MODEL 4400SBA4X2 SINGLE-AXLE TRUCK S/N 1HTMKAAR56H311306
POWERED BY CUMMINS MODEL D285 DIESEL ENGINE RATED AT 285-HP @

Continued on Page 10

Search Criteria: MRBD LTD.

Page: 10

2,000-RPM UNITIZED WITH EATON MANUAL 10-SPEED TRANSMISSION. TRUCK IS EQUIPPED WITH; 12,000-LB FRONT AXLE MOUNTED ON 315/80R22.5 TIRES WITH PAINTED STEEL WHEELS AND AIR-OPERATED BRAKES. REAR AXLE RATED AT

23,000 LBS EQUIPPED WITH AIR-RIDE SUSPENSION MOUNTED ON 11R22.5 TIRES W/ PAINTED STEEL WHEELS AND AIR-OPERATED BRAKES. CONVENTIONAL CAB EQUIPPED WITH A/C, DRIVER AIR RIDE SEAT, AND MOTOROLA 2 WAY RADIO, TIRE CHAINS, CHALKS ETC...

DYNWINCH CUSTOM-BUILT CEMENT PACKAGE; (1) MIXING COMPARTMENT HYDRAULIC POWERED AGITATOR C/W MISSION HYDRAULICALLY POWERED FLUID PUMP & INTERCONNECTING PLUMBING. (1) STAGING COMPARTMENT W/ MISSION HYDRAULICALLY POWERED FLUID PUMP & INTERCONNECTING PLUMBING. (1) DECK-MOUNTED MIXING HOPER C/W VALVING, OPERATOR'S CONTROL CONSOLE, STEEL-CONSTRUCTED DECK, LOCKING STORAGE COMPARTMENTS, FOLDING STEEL STAIRWELL, SAFETY RAILING AND LIGHTING.

IR1 DH: FABTEC MOBILE DOG HOUSE
APPROXIMATELY 8-FT WIDE X 20-FT LONG MOUNTED ON SINGLE WHEEL TANDEM AXLES RATED AT 10,000-LB PER EACH. DOG HOUSE ID COMPLETE WITH STANDARD AMENITIES INCLUDING; CUMMINSONAN 12-KW GENSET, PARTIONED UTILITY ROOM W/ ELECTRIC TOILET AND PERSONNEL QUARTERS W/ LOCKERS, FRIDGE, MICROWAVE, FOLDING LUNCH TABLE, KNOWLEDGE BOX, PADDED BENCHES, LOCKING STORAGE COMPARTMENTS, 110-V WIRING, INCANDESCENT LIGHTING ETC.

IR2 DH: FABTEC MOBILE DOG HOUSE
APPROXIMATELY 8-FT WIDE X 20-FT LONG MOUNTED ON SINGLE WHEEL TANDEM AXLES RATED AT 10,000-LB PER EACH. DOG HOUSE ID COMPLETE WITH STANDARD AMENITIES INCLUDING; CUMMINSONAN 12-KW GENSET, PARTIONED UTILITY ROOM W/ ELECTRIC TOILET AND PERSONNEL QUARTERS W/ LOCKERS, FRIDGE, MICROWAVE, FOLDING LUNCH TABLE, KNOWLEDGE BOX, PADDED BENCHES, LOCKING STORAGE COMPARTMENTS, 110-V WIRING, INCANDESCENT LIGHTING ETC.

IR3 DH: FABTEC MOBILE DOG HOUSE
APPROXIMATELY 8-FT WIDE X 20-FT LONG MOUNTED ON SINGLE WHEEL TANDEM AXLES RATED AT 10,000-LB PER EACH. DOG HOUSE ID COMPLETE WITH STANDARD AMENITIES INCLUDING; CUMMINSONAN 12-KW GENSET, PARTIONED UTILITY ROOM W/ ELECTRIC TOILET AND PERSONNEL QUARTERS W/ LOCKERS, FRIDGE, MICROWAVE, FOLDING LUNCH TABLE, KNOWLEDGE BOX, PADDED BENCHES, LOCKING STORAGE COMPARTMENTS, 110-V WIRING, INCANDESCENT LIGHTING ETC.

IR4 DH: 2002 FABTEC MOBILE DOG HOUSE S/N 4220491208
APPROXIMATELY 8-FT WIDE X 20-FT LONG MOUNTED ON SINGLE WHEEL TANDEM AXLES RATED AT 10,000-LB PER EACH. DOG HOUSE ID COMPLETE WITH STANDARD AMENITIES INCLUDING; CUMMINSONAN 12-KW GENSET W/ 3,888-HRS, PARTIONED UTILITY ROOM W/ ELECTRIC TOILET AND PERSONNEL QUARTERS W/ LOCKERS, FRIDGE, MICROWAVE, FOLDING LUNCH TABLE, KNOWLEDGE BOX, PADDED BENCHES, LOCKING STORAGE COMPARTMENTS, 110-V WIRING, INCANDESCENT LIGHTING ETC.

CASING JACK: 2009 ARDY RIGGING MODEL 5036DASJCC CASING JACK
S/N 08095036

INTERNAL REFERENCE: ELSA AND ESA CC #8772229001.

.
. .
. .
. .

Continued on Page 11

.
.
.
.
.
.
.
.
.
.
.

Registering
Party: SECUREFACT TRANSACTION SERVICES, INC.
350 BAY STREET, SUITE 300
TORONTO ON M5H 2S6

*** Name/Address Changed on October 26, 2015 to:

Registering
Party: SECUREFACT TRANSACTION SERVICES, INC.
365 BAY STREET SUITE 300
TORONTO ON M5H 2V1

*** Name/Address Changed on March 29, 2018 to:

Registering
Party: SECUREFACT TRANSACTION SERVICES INC.
200 - 372 BAY STREET
TORONTO ON M5H 2W9

----- A M E N D M E N T / O T H E R C H A N G E -----

Reg. #: 262838H Reg. Date: MAR 28, 2013
Reg. Time: 07:44:43
Control #: D1708261
Base Reg. Type: PPSA SECURITY AGREEMENT
Base Reg. #: 254777H Base Reg. Date: MAR 25, 2013

Details Description:
ADD GENERAL COLLATERAL DESCRIPTION

General Collateral:

*** ADDED ***

THE GOODS DESCRIBED HEREIN, WHEREVER SITUATED, AND ALL
PRESENT AND AFTER-ACQUIRED INTELLECTUAL PROPERTY, INTANGIBLES,
ATTACHMENTS, ACCESSORIES AND ACCESSIONS THERETO AND SPARE
PARTS, REPLACEMENTS, SUBSTITUTIONS, EXCHANGES AND TRADE-INS
THEREFOR, AND ALL RIGHTS, RECEIVABLES AND CHATTEL PAPER
DERIVED FROM OR EVIDENCING THE LEASE OR RENTAL THEREOF BY THE
DEBTOR TO THIRD PARTIES, AND ALL PROCEEDS RELATING THERETO.
PROCEEDS: ALL OF THE DEBTORS PRESENT AND AFTER-ACQUIRED
PERSONAL PROPERTY WHICH IS DERIVED DIRECTLY OR INDIRECTLY
FROM ANY DEALING WITH OR DISPOSITION OF THE ABOVE-DESCRIBED
COLLATERAL, INCLUDING, WITHOUT LIMITING THE GENERALITY OF THE
FOREGOING, ALL INSURANCE AND OTHER PAYMENTS PAYABLE AS
INDEMNITY OR COMPENSATION FOR LOSS OR DAMAGE THERETO AND
ALL CHATTEL PAPER, DOCUMENTS OF TITLE, GOODS, INSTRUMENTS,
INTANGIBLES, MONEY AND SECURITIES.

Search Criteria: MRBD LTD.

Page: 12

Registering

Party: GE CANADA EQUIPMENT FINANCING G.P.
1050-400 BURRARD STREET
VANCOUVER BC V6C 3A6

***** P P S A S E C U R I T Y A G R E E M E N T *****

Reg. Date: NOV 05, 2013 Reg. Length: 10 YEARS
Reg. Time: 13:11:22 Expiry Date: NOV 05, 2023
Base Reg. #: 646382H Control #: D2101154

Block#

- S0001 Secured Party: GE CANADA EQUIPMENT FINANCING G.P.
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1
- S0002 Secured Party: GE CANADA LEASING SERVICES COMPANY
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1
- S0003 Secured Party: GENERAL ELECTRIC CANADA EQUIPMENT
FINANCE G.P.
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1
- S0004 Secured Party: GE CANADA ASSET FINANCING HOLDING
COMPANY
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1
- S0005 Secured Party: GE TECHNOLOGY FINANCE
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1
- S0006 Secured Party: GE VFS CANADA LIMITED PARTNERSHIP
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1
- S0007 Secured Party: GE CAPITAL CANADA EQUIPMENT FINANCING
& LEASING COMPANY
3300, 525 - 8 AVENUE SW
CALGARY AB T2P 1G1
- =D0001 Base Debtor: MRBD LTD.
(Business) #1110 - 910 7TH AVENUE
CALGARY AB T2P 3N8

General Collateral:

ALL OF THE DEBTOR'S PRESENT AND AFTER-ACQUIRED PERSONAL PROPERTY.

Registering

Party: GE CANADA EQUIPMENT FINANCING G.P.
 1050-400 BURRARD STREET
 VANCOUVER BC V6C 3A6

Continued on Page 13

Search Criteria: MRBD LTD.

Page: 13

***** P P S A S E C U R I T Y A G R E E M E N T *****

Reg. Date: JUN 30, 2014 Reg. Length: 10 YEARS
 Reg. Time: 11:12:50 Expiry Date: JUN 30, 2024
 Base Reg. #: 043950I Control #: D2507129

Block#

S0001 Secured Party: ALBERTA TREASURY BRANCHES
 600, 444 - 7 AVENUE SW
 CALGARY AB T2P 0X8

D0001 Base Debtor: MUSTANG WELL SERVICES LTD
 (Business) 46272 HIGHWAY 56
 CAMROSE AB T4V 1X4

=D0002 Bus. Debtor: MRBD LTD
 46272 HIGHWAY 56
 CAMROSE AB T4V 1X4

Vehicle Collateral:

| Type | Serial # | Year | Make/Model | MH Reg.# |
|-------|----------|-------------------|------------|---------------------------|
| V0001 | MV | 2E9RSZ5Z36R073004 | 2006 | RIG CARRIER LOW RIDER |
| V0002 | MV | 1FVUF7WB1YPG53125 | 2000 | FREIGHTLINER CONVENTIONAL |
| V0003 | TR | MWS200902 | 2009 | MOBILE DOGHOUSE TRAILER |
| V0004 | MV | 2WLPCD2G5YK960249 | 2000 | WESTERN STAR FL941 |
| +++ | MV | 239RSZ5Z96R073007 | 2006 | RIG CARRIER LOW RIDER |
| V0006 | MV | 5KKPALAV83PL79816 | 2003 | WESTERN STAR 4900SA |
| V0007 | TR | MWS201002 | 2010 | MOBILE DOGHOUSE TRAILER |
| V0008 | MV | 2WKPDDJH4YK962165 | 2000 | WESTERN STAR 5964SX |
| +++ | MV | 1CYEGW6847T047676 | 2007 | CRANE DR0106 5 AXEL |
| V0010 | MV | 2WLPSDCJ3YK962739 | 2000 | WESTERN STAR 4986FX |
| V0011 | TR | 2M91DV3B7CC185001 | 2012 | SHOP-BUILT MOBILE |
| V0012 | MV | 1FUX3EDB3SP599554 | 2000 | HIGHWAY TANDEM-AXEL TRUCK |
| V0013 | MV | 2R9R4CF128E690061 | 2008 | IRON TECH SR242 5-AXEL |
| V0014 | MV | 5KJRALCK45PN91874 | 2005 | WESTERN STAR 4964SA |
| V0015 | TR | MWS004 | 1998 | SHOP-BUILT MOBILE |
| V0016 | TR | 2WKPDDCJ8WK950999 | 1988 | WESTERN STAR 4964FX |
| V0017 | MV | 1CYEGW6879T049305 | 2009 | CRANE DR20106 5-AXEL |
| V0018 | MV | 1FUUF7WB1YPG53125 | 2000 | FREIGHTLINER T800 TRUCK |
| V0019 | TR | 2S9NL666491022197 | 2009 | SOUTHLAND |
| V0020 | MV | 1FVPA6AV43PL05431 | 2003 | FREIGHTLINER COLUMBIA |
| V0021 | MV | 78244 | 1978 | CARDWELL B140 4 AXEL |
| V0022 | MV | 5KJRALCV86PV36016 | 2006 | WESTERN STAR TRI-DRIVE |

| | | | | |
|-------|----|-------------------|------|---------------------------|
| V0023 | TR | 2C9HB46D812044028 | 2001 | DOGHOUSE TRAILER |
| V0024 | MV | 196087 | 1980 | FRANKS TYPE 300 |
| V0025 | MV | 1FVPALAV83PL04474 | 2003 | FREIGHTLINER FLD120 TRUCK |
| V0026 | MV | 1HTXRAET11J086477 | 2001 | INTERNATIONAL 5900I 6X4 |
| V0027 | TR | 2M91DV3B7CC185008 | 2012 | MWS MOBILE DOGHOUSE |
| V0028 | TR | 20856 | 2013 | DYNAWINCH CD3-323 |
| V0029 | MV | 1HTXVSJT8DJ146041 | 2013 | INTERNATIONAL PAYSTAR |
| V0030 | TR | 21270 | 2005 | DYNAWINCH CDC-323 |
| V0031 | MV | 1HTXTAPT26J225893 | 2005 | INTERNATIONAL PAYSTAR |
| V0032 | TR | 21681 | 2007 | DYNAWINCH RECORDER BODY |
| V0033 | MV | 1HTXSAPT67J407021 | 2007 | INTERNATIONAL 5618 7X6 |
| V0034 | TR | 33844 | 2012 | DYNAWINCH RECORDER BODY |
| V0035 | MV | 1HTXVAPT2BJ196710 | 2011 | INTERNATIONAL PAYSTAR |
| V0036 | MV | 1HTNWSMT3DJ603273 | 2013 | INTERNATIONAL PAYSTAR |

Continued on Page 14

Search Criteria: MRBD LTD.

Page: 14

Vehicle Collateral:

| Type | Serial # | Year | Make/Model | MH Reg.# |
|-------|----------|-------------------|------------|---------------------------|
| V0037 | MV | 2WLNCCFF0TK941183 | 1996 | WESTERN STAR TRI DRIVE |
| V0038 | MV | 1HTXSAPT35J055979 | 2005 | INTERNATIONAL 5600 |
| V0039 | MV | 5KKPALCK45PU76629 | 2005 | WESTERN STAR TRI-DRIVE |
| V0040 | MV | 1HTWNAZT5DJ304393 | 2013 | INTERNATIONAL 7500SBA |
| V0041 | MV | 1HTWNAZT1CJ603037 | 2012 | INTERNATIONAL 7500SBA 6X4 |
| +++ | MV | 1HTWNAZTLCJ603037 | 2002 | INTERNATIONAL 7500SBA 6X4 |
| V0043 | MV | 1HTWNAZT0CJ660216 | 2012 | INTERNATIONAL 7500SBA 6X4 |
| V0044 | MV | 1HTWNAZT9CJ078969 | 2012 | INTERNATIONAL 7500SBA 6X4 |
| V0045 | MV | 1HTMKAAR87H407626 | 2006 | WESTERN STAR TRI DRIVE |

General Collateral:

FOR CLARIFICATION PURPOSES, THE FULL AND COMPLETE DESCRIPTION OF THE VEHICLE COLLATERAL IS:

MV 2006 2E9RSZ5Z36R073004 RIG CARRIER LOW RIDER 5 AXEL

MV 2000 1FVUF7WB1YPG53125 FREIGHTLINER CONVENTIONAL TRUCK

TR 2009 MWS200902 MOBILE DOGHOUSE TRAILER

MV 2000 2WLPCD2G5YK960249 WESTERN STAR FL941

MV 2006 239RSZ5Z96R073007 RIG CARRIER LOW RIDER 5 AXEL

MV 2003 5KKPALAV83PL79816 WESTERN STAR 4900SA TRI DIVE LOG TRUCK

TR 2010 MWS201002 MOBILE DOGHOUSE TRAILER

MV 2000 2WKPDDJH4YK962165 WESTERN STAR 5964SX TANDEM AXEL TRUCK

MV 2007 1CYEGW6847T047676 CRANE DR0106 5 AXEL CARRIER

MV 2000 2WLPSDCJ3YK962739 WESTERN STAR 4986FX TRIDRIVE PUMP TRUCK

TR 2012 2M91DV3B7CC185001 SHOP-BUILT MOBILE DOGHOUSE TRAILER

MV 2000 1FUX3EDB3SP599554 HIGHWAY TANDEM-AXEL TRUCK

MV 2008 2R9R4CF128E690061 IRON TECH SR242 5-AXEL CARRIER

MV 2005 5KJRALCK45PN91874 WESTERN STAR 4964SA TRI-DRIVE TRUCK

TR 1998 MWS004 SHOP-BUILT MOBILE DOGHOUSE TRAILER

TR 1988 2WKPDCCJ8WK950999 WESTERN STAR 4964FX TANDEM-AXEL TRUCK

MV 2009 1CYEGW6879T049305 CRANE DR20106 5-AXEL CARRIER

MV 2000 1FUUF7WB1YPG53125 FREIGHTLINER T800 TRUCK

TR 2009 2S9NL666491022197 SOUTHLAND CHT22500-9535-84 DOGHOUSE TRAILER

MV 2003 1FVPA6AV43PL05431 FREIGHTLINER COLUMBIA TANDEM AXEL

MV 1978 78244 CARDWELL B140 4 AXEL CARRIER

MV 2006 5KJRALCV86PV36016 WESTERN STAR TRI-DRIVE

TR 2001 2C9HB46D812044028 DOGHOUSE TRAILER
MV 1980 196087 FRANKS TYPE 300 FREE STANDING CARRIER
MV 2003 1FVPALAV83PL04474 FREIGHTLINER FLD120 TRUCK
MV 2001 1HTXRAET11J086477 INTERNATIONAL 5900I 6X4 SERIES TRACTOR
TR 2012 2M91DV3B7CC185008 MWS MOBILE DOGHOUSE TRAILER
TR 2013 20856 DYNWINCH CD3-323
MV 2013 1HTXVSJT8DJ146041 INTERNATIONAL PAYSTAR 5918X6 TRI DRIVE TRUCK
TR 2005 21270 DYNWINCH CDC-323
MV 2005 1HTXTAPT26J225893 INTERNATIONAL PAYSTAR 59001 TRI AXEL TRUCK
TR 2007 21681 DYNWINCH RECORDER BODY
MV 2007 1HTXSAPT67J407021 INTERNATIONAL 5618 7X6 TRI-AXEL TRUCK
TR 2012 33844 DYNWINCH RECORDER BODY
MV 2011 1HTXVAPT2BJ196710 INTERNATIONAL PAYSTAR TRI-DRIVE TRUCK
MV 2013 1HTNWSMT3DJ603273 INTERNATIONAL PAYSTAR 5918X6 TRIDRIVE TRUCK
MV 1996 2WLNCCFF0TK941183 WESTERN STAR TRI DRIVE TRUCK
MV 2005 1HTXSAPT35J055979 INTERNATIONAL 5600 6.4 TRI-DRIVE TRUCK

Continued on Page 15

Search Criteria: MRBD LTD.

Page: 15

MV 2005 5KKPALCK45PU76629 WESTERN STAR TRI-DRIVE TRUCK
MV 2013 1HTWNAZT5DJ304393 INTERNATIONAL 7500SBA 6X4 SINGLE AXEL TRUCK
MV 2012 1HTWNAZT1CJ603037 INTERNATIONAL 7500SBA 6X4 SINGLE AXEL TRUCK
MV 2002 1HTWNAZTLCJ603037 INTERNATIONAL 7500SBA 6X4 SINGLE AXEL TRUCK
MV 2012 1HTWNAZT0CJ660216 INTERNATIONAL 7500SBA 6X4 SINGLE AXEL TRUCK
MV 2012 1HTWNAZT9CJ078969 INTERNATIONAL 7500SBA 6X4 SINGLE AXEL TRUCK
MV 2006 1HTMKAAR87H407626 WESTERN STAR TRI DRIVE TRUCK

Registering

Party: GOWLING LAFLEUR HENDERSON LLP
2300-550 BURRARD ST., BOX 30
VANCOUVER BC V6C 2B5

*** Name/Address Changed on March 2, 2016 to:

Registering

Party: GOWLING WLG (CANADA) LLP
2300-550 BURRARD ST.
VANCOUVER BC V6C 2B5

*** Name/Address Changed on March 2, 2016 to:

Registering

Party: GOWLING WLG (CANADA) LLP
2300-550 BURRARD ST.
VANCOUVER BC V6C 2B5

----- A M E N D M E N T / O T H E R C H A N G E -----

Reg. #: 050635I

Reg. Date: JUL 03, 2014

Reg. Time: 15:12:21

Control #: D2515835

Base Reg. Type: PPSA SECURITY AGREEMENT

Base Reg. #: 043950I

Base Reg. Date: JUN 30, 2014

Details Description:

CORRECTION TO VEHICLE COLLATERAL SERIAL NUMBERS

Vehicle Collateral:

| Type | Serial # | Year | Make/Model | MH Reg.# |
|-----------------|-------------------|------|---------------------------|----------|
| *** DELETED *** | | | | |
| +++ MV | 239RSZ5Z96R073007 | 2006 | RIG CARRIER LOW RIDER | |
| *** DELETED *** | | | | |
| +++ MV | 1CYEGW6847T047676 | 2007 | CRANE DR0106 5 AXEL | |
| *** DELETED *** | | | | |
| +++ MV | 1HTWNAZTLCJ603037 | 2002 | INTERNATIONAL 7500SBA 6X4 | |
| *** ADDED *** | | | | |
| V0046 MV | 2E9RSZ5Z96R073007 | 2006 | RIG CARRIER LOW RIDER | |
| *** ADDED *** | | | | |
| V0047 MV | 1CYEGW6837T047676 | 2007 | CRANE DR0106 5 AXEL | |
| *** ADDED *** | | | | |
| V0048 MV | 1HTWNAZTLCJ603037 | 2012 | INTERNATIONAL 7500SBA 6X4 | |

General Collateral:

*** DELETED ***

MV 2006 239RSZ5Z96R073007 RIG CARRIER LOW RIDER 5 AXEL
MV 2007 1CYEGW6847T047676 CRANE DR0106 5 AXEL CARRIER
MV 2002 1HTWNAZTLCJ603037 INTERNATIONAL 7500SBA 6X4 SINGLE AXEL TRUCK

Continued on Page 16

Search Criteria: MRBD LTD.

Page: 16

*** ADDED ***

MV 2006 2E9RSZ5Z96R073007 RIG CARRIER LOW RIDER 5 AXEL
MV 2007 1CYEGW6837T047676 CRANE DR0106 5 AXEL CARRIER
MV 2012 1HTWNAZTLCJ603037 INTERNATIONAL 7500SBA 6X4 SINGLE AXEL TRUCK

ALL OF EACH DEBTOR'S PRESENT AND AFTER-ACQUIRED PERSONAL PROPERTY
(INCLUDING, WITHOUT LIMITATION, FIXTURES).

Registering

Party: GOWLING LAFLEUR HENDERSON LLP
2300-550 BURRARD ST., BOX 30
VANCOUVER BC V6C 2B5

*** Name/Address Changed on March 2, 2016 to:

Registering


Party: GOWLING WLG (CANADA) LLP
2300-550 BURRARD ST.
VANCOUVER BC V6C 2B5

*** Name/Address Changed on March 2, 2016 to:

Registering

Party: GOWLING WLG (CANADA) LLP
2300-550 BURRARD ST.
VANCOUVER BC V6C 2B5

This is **Exhibit "R"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'A. Mersich', is written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor



Saskatchewan Personal Property Registry Search Result

Searching Party: Gowling Lafleur Henderson LLP
Search Date: 10-May-2018 12:42:13
Search Type: Standard

Search #: 202745112
Client Reference: A155881/K Delure
Control #:

Search Criteria

Search By: Business Debtor Name
Business Name: MRBD Ltd.

The following list displays all matches & indicates the ones that were selected.

4 Registration(s) Found: Exacts (4) - Similar(s) (0)

| Selected | Match | Registration # | Registration Type | Debtor Name | City | Enforcement Instruction | Enforcement Instruction Registration # |
|----------|-------|----------------|--------------------------------------|-------------|---------|-------------------------|--|
| Yes | Exact | 300999895 | Personal Property Security Agreement | MRBD Ltd. | Calgary | No | N/A |
| Yes | Exact | 301107147 | Personal Property Security Agreement | MRBD LTD. | CALGARY | No | N/A |
| Yes | Exact | 301208502 | Personal Property Security Agreement | MRBD Ltd. | Camrose | No | N/A |
| Yes | Exact | 301208504 | Personal Property Security Agreement | MRBD Ltd. | Camrose | No | N/A |



**Saskatchewan
Personal Property Registry
Search Result**

Current - Exact

Registration Type: Personal Property Security Agreement
Registration Date: 22-Mar-2013 10:48:39

Registration #: 300999895
Expiry Date: 22-Mar-2023

Event Type: Amendment
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 Canada |

Secured Party

| | |
|---|---|
| Item #: 1 | Address: 3300, 525 - 8 Avenue SW |
| Party ID: 151712159 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE Canada Equipment Financing G.P. | Canada |

Debtor Party

| | |
|---|---|
| *Item #: 1 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785197 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: MRBD Ltd. | Canada |
| Item #: 2 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785198 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: Mustang Well Services Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVSJT8DJ146041 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 2 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXTAPT26J225893 | Model: 5900I |
| Override: No | Color: |
| Item #: 3 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT67J407021 | Model: 5618 |
| Override: No | Color: |
| Item #: 4 | Year: 2011 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVAPT2BJ196710 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 5 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTNWSMT3DJ603273 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 6 | Year: 1996 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 2WLNCCFF0TK941183 | Model: tridrive |
| Override: No | Color: |
| Item #: 7 | Year: 2005 |



Saskatchewan Personal Property Registry Search Result

Serial Property

| | |
|------------------------------------|--|
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 5KKPALCK45PU76629 | Model: |
| Override: No | Color: |
| Item #: 8 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT35J055979 | Model: 5600 |
| Override: No | Color: |
| Item #: 9 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT5DJ304393 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 10 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZTLCJ603037 | Model: 75006X4 |
| Override: Yes | Color: |
| Item #: 11 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR87H407626 | Model: 44006X4 |
| Override: No | Color: |
| Item #: 12 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT9CJ078969 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 13 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR56H311306 | Model: 4400SBA4X2 |
| Override: No | Color: |
| Item #: 14 | Year: 2002 |
| Serial Type: Trailer | Make/Desc.: Fabtec mobile dog house |
| Serial #: 4220491208 | Model: |
| Override: No | Color: |

General Property

IR1:

2013 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive: Wireline s/n 20856

2012 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printrex printer.

Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast s/n 24030

Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/8 in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/4 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/4 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 3-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2013 International Paystar Model 5918x6 tri-drive truck vin-1HTXVSJT8DJ146041



Saskatchewan Personal Property Registry Search Result

General Property

Powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR2:

2005 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive.

Wireline s/n 21270 s/n Gen - X07K433250

2005 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast s/n 21270

Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line DW motor s/n 054381889

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope DW motor s/n 054081345

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2- speed planetary gear box unitized with Sauer 2- speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 3/8-in E-line c/w encoders & V-Roller

guide assembly (side-to-side movement), load cell & electronic depth counter.

2006 International Paystar Model 5900I 8x6 tri-drive truck s/n 1HTXTAPT26J225893
Powered by Cummins Model ISX 450 diesel engine rated at 450-hp @ 2,000-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR3:

2007 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive

2007 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage



Saskatchewan Personal Property Registry Search Result

General Property

cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope.

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021

Powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR4:

2011 DynaWinch Log & Swab Unit w/ 62-ft HD Mast and Tandem Drums, Mounted on International Tri-drive, Wireline s/n 23844

2011 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Dynawinch Model CD2-3-260HD telescoping mast s/n 23844

62-ft 6-in overall working height rated for 33,500-lbs w/ 3/8 in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope.

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 3/8 in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2011 International Paystar Model 5918x6 Tri-axle truck s/n 1HTXVAPT2BJ196710



Saskatchewan
Personal Property Registry
Search Result

General Property

Powered by Cummins Model ISX 600 diesel engine rated at 600-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to tandem 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR1 PT:

2013 International Pump Truck w/ Jolly Pump & Tank:

2013 International Paystar Model 5918x6 tri-drive truck s/n 1HTNWSMT3DJ603273 powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pullrating & junk basket with elbows, chick sans etc ...

Jolly Engineering Services Model JES-300 mud pump s/n 1201

5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. pick-up slings. Lot of rod chaser, tubing drifts, rod transfers. Lot of Pup joints, 60-mm & 73-mm.

(1) 28-m (cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR2 PT:

1996 Western Star Pump Truck w/ Empire pump & Tank:

1996 Western Star Model tridrive truck s/n 2WLNCCFF0TK941183

Powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR3 PT:

2005 Western Star Pump Truck w/ Empire Pump & Tank:

2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629

powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank deck; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans



Saskatchewan Personal Property Registry Search Result

General Property

etc ...

Empire Model E-300 mud pump s/n LT01-2008-009

4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console.

Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR4 PT:

2005 International Pump Truck w/ Gardner Denver Pump w/ Tank:

2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979

powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

ET 01:

2013 International Truck w/ Dynawinch BOP Support Deck:

2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393

Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long s/n 24058 w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.

Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24

w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.

Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2 -in dies, lot of rod tools including; rod hook, elevators, wrenches, etc.

ET 02:

2012 International Truck w/ Dynawinch BOP Support Deck:

2012 International Paystar Model 75006X4 tandem-axle truck s/n 1HTWNAZTLCJ603037

Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc... Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.

Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.

Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 -in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA



Saskatchewan
Personal Property Registry
Search Result

General Property

(Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc..

ET 03:

2007 International Truck w/ Dynawinch BOP Support Deck:
2007 International Paystar Model 44006X4 single-axle truck s/n 1HTMKAAR87H407626 Powered by International Model DT466 diesel engine rated at 285-hp unitized with Eaton Fuller Model FR9210 10-speed manual transmission. Truck is equipped with; 12,000-lb front axles mounted on 11R22.5 tires with polished aluminum wheels and air-operated brakes. Rear axle rated at 23,000-lbs equipped with air-ride suspension mounted on 11R22.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc... Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

ET 04:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Model 7500SBA6X4 tandem-axle truck s/n 1HTWNAZT9CJ078969 powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison automatic transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

IR CT - 2006 International Cement Truck:

2006 International Model 4400SBA4X2 single-axle truck s/n 1HTMKAAR56H311306 Powered by Cummins Model D285 diesel engine rated at 285-hp @ 2,000-rpm unitized with Eaton manual 10-speed transmission. Truck is equipped with; 12,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 23,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch custom-built cement package; (1) mixing compartment hydraulic powered agitator c/w mission hydraulically powered fluid pump & interconnecting plumbing. (1) Staging compartment w/ mission hydraulically powered fluid pump & interconnecting plumbing. (1) deck-mounted mixing hoper c/w valving, operator's control console, steel-constructed deck, locking storage compartments, folding steel stairwell, safety railing and lighting.

IR1 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR2 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR3 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at



**Saskatchewan
Personal Property Registry
Search Result**

General Property

10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, Incandescent lighting etc.

IR4 DH: 2002 Fabtec mobile dog house s/n 4220491208
Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset w/ 3,888-hrs, partioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

Casing Jack: 2009 Ardy Rigging Model 5036DASJCC casing jack s/n 08095036

Internal reference: ELSA and ESA CC #8772229001.

The goods described herein, wherever situated, and all Present and after-acquired intellectual property, intangibles, Attachments, accessories and accessions thereto and spare Parts, replacements, substitutions, exchanges and trade-ins Therefor, and all rights, receivables and chattel paper Derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto. Proceeds: all of the debtors present and after-acquired Personal property which is derived directly or Indirectly From any dealing with or disposition of the above-described Collateral, including, without limiting the generality of the Foregoing, all insurance and other payments payable as Indemnity or compensation for loss or damage thereto and All chattel paper, documents of title, goods, instruments, Intangibles, money and securities.

History - Setup

Registration Type: Personal Property Security Agreement
Registration Date: 22-Mar-2013 10:48:39

Registration #: 300999895
Transaction #: 1
Expiry Date: 22-Mar-2023

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 |
| | Canada |

Secured Party

| | |
|---|---|
| Item #: 1 | Address: 3300, 525 - 8 Avenue SW |
| Party ID: 151712159 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE Canada Equipment Financing G.P. | Canada |

Debtor Party

| | |
|---|---|
| Item #: 1 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785197 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: MRBD Ltd. | Canada |
| Item #: 2 | Address: #1110 - 910, 7th Avenue |
| Party ID: 151785198 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: Mustang Well Services Ltd. | Canada |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVSJT8DJ146041 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 2 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT26J225893 | Model: 5900I |
| Override: No | Color: |
| Item #: 3 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT67J407021 | Model: 5618 |
| Override: No | Color: |
| Item #: 4 | Year: 2011 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXVAPT2BJ196710 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 5 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTNWSMT3DJ603273 | Model: 5918x6 |
| Override: No | Color: |
| Item #: 6 | Year: 1996 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 2WLNCCFF0TK941183 | Model: tridrive |
| Override: No | Color: |
| Item #: 7 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star Truck |
| Serial #: 5KKPALCK45PU76629 | Model: |
| Override: No | Color: |
| Item #: 8 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTXSAPT35J055979 | Model: 5600 |
| Override: No | Color: |
| Item #: 9 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT5DJ304393 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 10 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZTLCJ603037 | Model: 75006X4 |
| Override: Yes | Color: |
| Item #: 11 | Year: 2007 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR87H407626 | Model: 44006X4 |
| Override: No | Color: |
| Item #: 12 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTWNAZT9CJ078969 | Model: 7500SBA6X4 |
| Override: No | Color: |
| Item #: 13 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: International Truck |
| Serial #: 1HTMKAAR56H311306 | Model: 4400SBA4X2 |
| Override: No | Color: |
| Item #: 14 | Year: 2002 |
| Serial Type: Trailer | Make/Desc.: Fabtec mobile dog house |
| Serial #: 4220491208 | Model: |
| Override: No | Color: |

General Property



Saskatchewan
Personal Property Registry
Search Result

General Property

IR1:

2013 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive: Wireline s/n 20856
2012 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printrex printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast s/n 24030
Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/8 in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/4 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/4 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.
Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 3-speed hydraulic motor.
E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2013 International Paystar Model 5918x6 tri-drive truck vin-1HTXVSJT8DJ146041
Powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc..
Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR2:

2005 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive.
Wireline s/n 21270 s/n Gen - X07K433250
2005 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast s/n 21270
Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line DW motor s/n 054381889
Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.
Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope DW



Saskatchewan Personal Property Registry Search Result

General Property

motor s/n 054081345

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2006 International Paystar Model 5900I 8x6 tri-drive truck s/n 1HTXTAPT26J225893

Powered by Cummins Model ISX 450 diesel engine rated at 450-hp @ 2,000-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR3:

2007 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive

2007 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-kW hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021

Powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air-operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR4:



Saskatchewan
Personal Property Registry
Search Result

General Property

2011 DynaWinch Log & Swab Unit w/ 62-ft HD Mast and Tandem Drums, Mounted on International Tri-drive, Wireline s/n 23844

2011 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Dynawinch Model CD2-3-260HD telescoping mast s/n 23844

62-ft 6-in overall working height rated for 33,500-lbs w/ 3/8 in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 3/8 in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2011 International Paystar Model 5918x6 Tri-axle truck s/n 1HTXVAPT2BJ196710

Powered by Cummins Model ISX 600 diesel engine rated at 600-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to tandem 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7/8-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR1 PT:

2013 International Pump Truck w/ Jolly Pump & Tank:

2013 International Paystar Model 5918x6 tri-drive truck s/n 1HTNWSMT3DJ603273

powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pullrating & junk basket with elbows, chocks etc ...

Jolly Engineering Services Model JES-300 mud pump s/n 1201

5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. pick-up slings. Lot of rod chaser, tubing drifts, rod transfers. Lot of Pup joints, 60-mm & 73-mm.

(1) 28-m (cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR2 PT:

1996 Western Star Pump Truck w/ Empire pump & Tank:

1996 Western Star Model tridrive truck s/n 2WLNCCFF0TK941183



Saskatchewan Personal Property Registry Search Result

General Property

Powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR3 PT:

2005 Western Star Pump Truck w/ Empire Pump & Tank:

2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629

powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank deck; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump s/n LT01-2008-009

4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR4 PT:

2005 International Pump Truck w/ Gardner Denver Pump w/ Tank:

2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979

powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chocks etc ...

Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.

(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

ET 01:

2013 International Truck w/ Dynawinch BOP Support Deck:

2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393

Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc... Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long s/n 24058 w/ BOP stump c/w Warn positioning winch, tubular wall racks, chock-hangers, caged junk



Saskatchewan
Personal Property Registry
Search Result

General Property

baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24
w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2 -in dies, lot of rod tools including; rod hook, elevators, wrenches, etc.

ET 02:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Paystar Model 75006X4 tandem-axle truck s/n 1HTWNAZTLCJ603037
Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 -in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc..

ET 03:

2007 International Truck w/ Dynawinch BOP Support Deck:
2007 International Paystar Model 44006X4 single-axle truck s/n 1HTMKAAR87H407626
Powered by International Model DT466 diesel engine rated at 285-hp unitized with Eaton Fuller Model FR9210 10-speed manual transmission. Truck is equipped with; 12,000-lb front axles mounted on 11R22.5 tires with polished aluminum wheels and air-operated brakes. Rear axle rated at 23,000-lbs equipped with air-ride suspension mounted on 11R22.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

ET 04:

2012 International Truck w/ Dynawinch BOP Support Deck:
2012 International Model 7500SBA6X4 tandem-axle truck s/n 1HTWNAZT9CJ078969
powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison automatic transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.
Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

IR CT - 2006 International Cement Truck:



**Saskatchewan
Personal Property Registry
Search Result**

General Property

2006 International Model 4400SBA4X2 single-axle truck s/n 1HTMKAAR56H311306
 Powered by Cummins Model D285 diesel engine rated at 285-hp @ 2,000-rpm unitized with Eaton manual 10-speed transmission. Truck is equipped with; 12,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 23,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
 Dynawinch custom-built cement package; (1) mixing compartment hydraulic powered agitator c/w mission hydraulically powered fluid pump & interconnecting plumbing. (1) Staging compartment w/ mission hydraulically powered fluid pump & interconnecting plumbing. (1) deck-mounted mixing hopper c/w valving, operator's control console, steel-constructed deck, locking storage compartments, folding steel stairwell, safety railing and lighting.

IR1 DH: Fabtec mobile dog house
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR2 DH: Fabtec mobile dog house
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR3 DH: Fabtec mobile dog house
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR4 DH: 2002 Fabtec mobile dog house s/n 4220491208
 Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset w/ 3,888-hrs, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

Casing Jack: 2009 Ardy Rigging Model 5036DASJCC casing jack s/n 08095036

Internal reference: ELSA and ESA CC #8772229001.

History - Amendment

**Registration #: 300999895
 Transaction #: 2**

Amendment Date: 28-Mar-2013 10:59:34

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 |
| | Canada |



Saskatchewan Personal Property Registry Search Result

General Property

IR1:

2013 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive: Wireline s/n 20856
2012 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printrex printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast s/n 24030
Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/8 in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/4 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/4 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.
Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 3-speed hydraulic motor.
E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2013 International Paystar Model 5918x6 tri-drive truck vin-1HTXVSJT8DJ146041
Powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flootee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-KW hydraulically - powered generator, hand tools etc.

IR2:

2005 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive.
Wireline s/n 21270 s/n Gen - X07K433250
2005 DynaWinch Model CD3-323 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.
CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer.
Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.
Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast s/n 21270
Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.
Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line DW motor s/n 054381889
Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.



Saskatchewan Personal Property Registry Search Result

General Property

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope DW motor s/n 054081345

Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller

guide assembly (side-to-side movement), load cell & electronic depth counter.

2006 International Paystar Model 5900I 8x6 tri-drive truck s/n 1HTXTAPT26J225893

Powered by Cummins Model ISX 450 diesel engine rated at 450-hp @ 2,000-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR3:

2007 DynaWinch Log & Swab Unit w/ 52-ft Mast and Tandem Drums, Mounted on International Tri-drive

2007 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 3/8 -in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 -in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021

Powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air-operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chocks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 3/8 in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.



Saskatchewan Personal Property Registry Search Result

General Property

IR4:

2011 DynaWinch Log & Swab Unit w/ 62-ft HD Mast and Tandem Drums, Mounted on International Tri-drive, Wireline s/n 23844

2011 DynaWinch recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc.

CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear.

Dynawinch Model CD2-3-260HD telescoping mast s/n 23844

62-ft 6-in overall working height rated for 33,500-lbs w/ 3/8 in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 3/8 in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 3/8 in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting.

Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 3/8 in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor.

Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor.

E-line measuring head assembly; measuring head grooved for 3/8 in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

2011 International Paystar Model 5918x6 Tri-axle truck s/n 1HTXVAPT2BJ196710

Powered by Cummins Model ISX 600 diesel engine rated at 600-hp @ 1,700-rpm unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to tandem 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...

Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

IR1 PT:

2013 International Pump Truck w/ Jolly Pump & Tank:

2013 International Paystar Model 5918x6 tri-drive truck s/n 1HTNWSMT3DJ603273

powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...

Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pullrating & junk basket with elbows, chick sans etc ...

Jolly Engineering Services Model JES-300 mud pump s/n 1201

5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. pick-up slings. Lot of rod chaser, tubing drifts, rod transfers. Lot of Pup joints, 60-mm & 73-mm.

(1) 28-m (cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR2 PT:

1996 Western Star Pump Truck w/ Empire pump & Tank:



Saskatchewan Personal Property Registry Search Result

General Property

1996 Western Star Model tri-drive truck s/n 2WLNCCFF0TK941183
Powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc ...
Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.
(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR3 PT:

2005 Western Star Pump Truck w/ Empire Pump & Tank:
2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629
powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Truck is equipped with steel-constructed wood plank deck; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc ...
Empire Model E-300 mud pump s/n LT01-2008-009
4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.
(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long

IR4 PT:

2005 International Pump Truck w/ Gardner Denver Pump w/ Tank:
2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979
powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc ...
Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO.
(1) 28-m(cubic) 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000 psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40ft kelly hose x 3625 psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

ET 01:

2013 International Truck w/ Dynawinch BOP Support Deck:
2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393
Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc...
Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long s/n 24058



Saskatchewan
Personal Property Registry
Search Result

General Property

w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.
Traveling & Rig Floor Equipment - McKissick Fig 83AWT-24, 100-ton traveling block assembly s/n 06-349-24

w/ (3) 24-in sheaves grooved for 1-in line. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147.. Set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline.

Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.

Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2 -in dies, lot of rod tools including; rod hook, elevators, wrenches, etc.

ET 02:

2012 International Truck w/ Dynawinch BOP Support Deck:

2012 International Paystar Model 75006X4 tandem-axle truck s/n 1HTWNAZTLCJ603037 Powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...

Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.

Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.

Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 -in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc..

ET 03:

2007 International Truck w/ Dynawinch BOP Support Deck:

2007 International Paystar Model 44006X4 single-axle truck s/n 1HTMKAAR87H407626 Powered by International Model DT466 diesel engine rated at 285-hp unitized with Eaton Fuller Model FR9210 10-speed manual transmission. Truck is equipped with; 12,000-lb front axles mounted on 11R22.5 tires with polished aluminum wheels and air-operated brakes. Rear axle rated at 23,000-lbs equipped with air-ride suspension mounted on 11R22.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...

Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.

Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.

Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...

ET 04:

2012 International Truck w/ Dynawinch BOP Support Deck:

2012 International Model 7500SBA6X4 tandem-axle truck s/n 1HTWNAZT9CJ078969 powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison automatic transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...

Dynawinch BOP support deck; approximately 8 1/2-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc.

Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls.

Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2 3/8 in 2 7/8 in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in 3 1/2-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc...



Saskatchewan
Personal Property Registry
Search Result

General Property

IR CT - 2006 International Cement Truck:

2006 International Model 4400SBA4X2 single-axle truck s/n 1HTMKAAR56H311306
Powered by Cummins Model D285 diesel engine rated at 285-hp @ 2,000-rpm unitized with Eaton manual 10-speed transmission. Truck is equipped with; 12,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 23,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc...
Dynawinch custom-built cement package; (1) mixing compartment hydraulic powered agitator c/w mission hydraulically powered fluid pump & interconnecting plumbing. (1) Staging compartment w/ mission hydraulically powered fluid pump & interconnecting plumbing. (1) deck-mounted mixing hopper c/w valving, operator's control console, steel-constructed deck, locking storage compartments, folding steel stairwell, safety railing and lighting.

IR1 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR2 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR3 DH: Fabtec mobile dog house

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

IR4 DH: 2002 Fabtec mobile dog house s/n 4220491208

Approximately 8-ft wide x 20-ft long mounted on single wheel tandem axles rated at 10,000-lb per each. Dog house id complete with standard amenities including; CumminsOnan 12-kW genset w/ 3,888-hrs, partitioned utility room w/ electric toilet and personnel quarters w/ lockers, fridge, microwave, folding lunch table, knowledge box, padded benches, locking storage compartments, 110-V wiring, incandescent lighting etc.

Casing Jack: 2009 Ardy Rigging Model 5036DASJCC casing jack s/n 08095036

Internal reference: ELSA and ESA CC #8772229001.

The goods described herein, wherever situated, and all Present and after-acquired intellectual property, intangibles, Attachments, accessories and accessions thereto and spare Parts, replacements, substitutions, exchanges and trade-ins Therefor, and all rights, receivables and chattel paper Derived from or evidencing the lease or rental thereof by the Debtor to third parties, and all proceeds relating thereto. Proceeds: all of the debtors present and after-acquired Personal property which is derived directly or indirectly From any dealing with or disposition of the above-described Collateral, including, without limiting the generality of the Foregoing, all insurance and other payments payable as Indemnity or compensation for loss or damage thereto and All chattel paper, documents of title, goods, Instruments, Intangibles, money and securities.



**Saskatchewan
Personal Property Registry
Search Result**

Current - Exact

Registration Type: Personal Property Security Agreement
Registration Date: 05-Nov-2013 16:54:39

Registration #: 301107147
Expiry Date: 05-Nov-2023

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|--|--|
| Party ID: 151217686 - 1 | Address: 350 BAY STREET SUITE 300 |
| Entity Type: Business | TORONTO, Ontario |
| Name: SECUREFACT TRANSACTION SERVICES, INC. | M5H2S6 Canada |

Secured Party

| | |
|--|---|
| Item #: 1 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959597 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CANADA EQUIPMENT FINANCING G.P. | Canada |
| Item #: 2 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959598 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CANADA LEASING SERVICES COMPANY | Canada |
| Item #: 3 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959599 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GENERAL ELECTRIC CANADA EQUIPMENT FINANCE G.P. | Canada |
| Item #: 4 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959600 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CANADA ASSET FINANCING HOLDING COMPANY | Canada |
| Item #: 5 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959601 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE TECHNOLOGY FINANCE | Canada |
| Item #: 6 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959602 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE VFS CANADA LIMITED PARTNERSHIP | Canada |
| Item #: 7 | Address: 3300, 525 - 8 AVENUE SW |
| Party ID: 151959603 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: GE CAPITAL CANADA EQUIPMENT FINANCING & LEASING COMPANY | Canada |

Debtor Party

| | |
|--------------------------------|--|
| *Item #: 1 | Address: #1110 - 910 7TH AVENUE |
| Party ID: 151959596 - 1 | CALGARY, Alberta |
| Entity Type: Business | T2P3N8 |
| Name: MRBD LTD. | Canada |

General Property

ALL OF THE DEBTOR'S PRESENT AND AFTER-ACQUIRED PERSONAL PROPERTY.



**Saskatchewan
Personal Property Registry
Search Result**





**Saskatchewan
Personal Property Registry
Search Result**

Current - Exact

Registration Type: Personal Property Security Agreement
Registration Date: 03-Jul-2014 10:16:26

Registration #: 301208502
Expiry Date: 03-Jul-2024

Event Type: Amendment
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 Canada |

Secured Party

| | |
|--|--|
| Item #: 1 | Address: 600, 444 – 7 Avenue S.W. |
| Party ID: 151816583 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P0X8 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party

| | |
|---|----------------------------------|
| Item #: 1 | Address: 46272 Highway 56 |
| Party ID: 152122503 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Mustang Well Services Ltd. | Canada |
| * Item #: 2 | Address: 46272 Highway 56 |
| Party ID: 152122504 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: MRBD Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Rig Carrier low rider 5 axel |
| Serial #: 2E9RSZ5Z36R073004 | Model: |
| Override: No | Color: |
| Item #: 2 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Conventional Truck |
| Serial #: 1FVUF7WB1YPG53125 | Model: |
| Override: No | Color: |
| Item #: 3 | Year: 2009 |
| Serial Type: Trailer | Make/Desc.: Mobile doghouse trailer |
| Serial #: MWS200902 | Model: |
| Override: No | Color: |
| Item #: 4 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star FL941 |
| Serial #: 2WLPCD2G5YK960249 | Model: |
| Override: No | Color: |
| Item #: 5 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Rig Carrier low rider 5 axel |
| Serial #: 2E9RSZ5Z96R073007 | Model: |
| Override: Yes | Color: |
| Item #: 6 | Year: 2003 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star 4900SA Tri Drive Log Truck |
| Serial #: 5KKPALAV83PL79816 | Model: |
| Override: No | Color: |
| Item #: 7 | Year: 2010 |



Saskatchewan Personal Property Registry Search Result

Serial Property

| | |
|--|---|
| Serial Type: Trailer Serial #: MWS201002 Override: No | Make/Desc.: Mobile doghouse trailer Model: Color: |
| Item #: 8 Serial Type: Motor Vehicle Serial #: 2WKPDDJH4YK962165 Override: No | Year: 2000 Make/Desc.: Western Star 5964SX tandem axel truck Model: Color: |
| Item #: 9 Serial Type: Motor Vehicle Serial #: 1CYEGW6837T047676 Override: Yes | Year: 2007 Make/Desc.: Crane DR0106 5 axel carrier Model: Color: |
| Item #: 10 Serial Type: Motor Vehicle Serial #: 2WLPSDCJ3YK962739 Override: No | Year: 2000 Make/Desc.: Western Star 4986FX tridrive pump truck Model: Color: |
| Item #: 11 Serial Type: Trailer Serial #: 2M91DV3B7CC185001 Override: No | Year: 2012 Make/Desc.: Shop-built mobile doghouse trailer Model: Color: |
| Item #: 13 Serial Type: Motor Vehicle Serial #: 2R9R4CF128E690061 Override: No | Year: 2008 Make/Desc.: Iron tech SR242 5-axel carrier Model: Color: |
| Item #: 14 Serial Type: Motor Vehicle Serial #: 5KJRALCK45PN91874 Override: No | Year: 2005 Make/Desc.: Western Star 4964SA tri-drive truck Model: Color: |
| Item #: 15 Serial Type: Trailer Serial #: MWS004 Override: No | Year: 1998 Make/Desc.: Shop-built mobile doghouse trailer Model: Color: |
| Item #: 16 Serial Type: Trailer Serial #: 2WKPDDCJ8WK950999 Override: No | Year: 1988 Make/Desc.: Western Star 4964FX tandem-axel truck Model: Color: |
| Item #: 17 Serial Type: Motor Vehicle Serial #: 1CYEGW6879T049305 Override: No | Year: 2009 Make/Desc.: Crane DR20106 5-axel carrier Model: Color: |
| Item #: 18 Serial Type: Motor Vehicle Serial #: 1FUUF7WB1YPG53125 Override: Yes | Year: 2000 Make/Desc.: Freightliner T800 Truck Model: Color: |
| Item #: 19 Serial Type: Trailer Serial #: 2S9NL666491022197 Override: No | Year: 2009 Make/Desc.: Southland CHT22500-9535-84 doghouse trailer Model: Color: |
| Item #: 20 Serial Type: Motor Vehicle Serial #: 1FVPA6AV43PL05431 Override: No | Year: 2003 Make/Desc.: Freightliner Columbia tandem axel Model: Color: |
| Item #: 21 Serial Type: Motor Vehicle Serial #: 78244 Override: Yes | Year: 1978 Make/Desc.: Cardwell B140 4 axel carrier Model: Color: |
| Item #: 22 Serial Type: Motor Vehicle Serial #: 5KJRALCV86PV36016 Override: No | Year: 2006 Make/Desc.: Western Star Tri-drive Model: Color: |



**Saskatchewan
Personal Property Registry
Search Result**

Serial Property

Item #: 23
Serial Type: Trailer
Serial #: 2C9HB46D812044028
Override: No

Year: 2001
Make/Desc.: Doghouse trailer
Model:
Color:

Item #: 24
Serial Type: Motor Vehicle
Serial #: 196087
Override: Yes

Year: 1980
Make/Desc.: Franks Type 300 free standing carrier
Model:
Color:

Item #: 25
Serial Type: Motor Vehicle
Serial #: 1FVPALAV83PL04474
Override: No

Year: 2003
Make/Desc.: Freightliner FLD120 truck
Model:
Color:

Item #: 26
Serial Type: Motor Vehicle
Serial #: 1HTXRAET11J086477
Override: No

Year: 2001
Make/Desc.: International 5900i 6x4 series tractor
Model:
Color:

Item #: 27
Serial Type: Trailer
Serial #: 2M91DV3B7CC185008
Override: No

Year: 2012
Make/Desc.: MWS mobile doghouse trailer
Model:
Color:

Item #: 28
Serial Type: Trailer
Serial #: 20856
Override: No

Year: 2013
Make/Desc.: DynaWinch CD3-323
Model:
Color:

Item #: 29
Serial Type: Motor Vehicle
Serial #: 1HTXVSJT8DJ146041
Override: No

Year: 2013
Make/Desc.: International Paystar 5918x6 tri drive truck
Model:
Color:

Item #: 30
Serial Type: Trailer
Serial #: 21270
Override: No

Year: 2005
Make/Desc.: DynaWinch CDC-323
Model:
Color:

Item #: 31
Serial Type: Motor Vehicle
Serial #: 1HTXTAPT26J225893
Override: No

Year: 2005
Make/Desc.: International Paystar 5900i tri axel truck
Model:
Color:

Item #: 32
Serial Type: Trailer
Serial #: 21681
Override: No

Year: 2007
Make/Desc.: DynaWinch recorder body
Model:
Color:

Item #: 33
Serial Type: Motor Vehicle
Serial #: 1HTXSAPT67J407021
Override: No

Year: 2007
Make/Desc.: International 5618 7x6 tri-axel truck
Model:
Color:

Item #: 34
Serial Type: Trailer
Serial #: 33844
Override: No

Year: 2012
Make/Desc.: DynaWinch recorder body
Model:
Color:

Item #: 35
Serial Type: Motor Vehicle
Serial #: 1HTXVAPT2BJ196710
Override: No

Year: 2011
Make/Desc.: International Paystar tri-drive truck
Model:
Color:

Item #: 36
Serial Type: Motor Vehicle
Serial #: 1HTNWSMT3DJ603273
Override: No

Year: 2013
Make/Desc.: International Paystar 5918x6 tridrive truck
Model:
Color:

Item #: 37
Serial Type: Motor Vehicle
Serial #: 2WLNCCFF0TK941183

Year: 1996
Make/Desc.: Western Star tri drive truck
Model:



Saskatchewan Personal Property Registry Search Result

Serial Property

Override: No

Color:

General Property

(1) Used 2006 Rig Carrier, low-rider, 5-axel self-propelled back-in carrier s/n 2E9RSZ5Z36R073004. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65/22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Attached with 1 Used 2006, SJ Petro, XJ250S Double-drum drawworks s/n 06R0886197 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, SJ Petro bankd 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-OMatic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @425-hp @ 32000 rpm. Transmission; Allison Model HT750-DRDDB torque-tube-drive automatic 5-speed transmission w/ power tak-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic Syste; Rig-mounted hydraulic system with approximately 200-gal takn, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear leveling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) Used 2000 Freightliner, Conventional truck equipped w/ Rock Well Model 941 s/n 1FVUF7WB1YPG53125 spring-ride front axel rate at 16,000-lb mounted on 385/65R22.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 19,000-lbs each, equipped w/ airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels, air -operated brakes & ABS braking system. Truck is c/w fuel tanks & locking storage compartments. Engine; Cummins Model Signature 600 15-L diesel engine rated at 600-hp @ 2000- rpm s/n 14004589 w/ PAS turbo Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission s/n 70333492-02. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700051. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses s/n 16980. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for ?-in line s/n 06-353-54. (1) Set Foster Model 93R hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 05254-1, 2. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1237 Cavins depthometer for 14.28-mm. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 21,000-kPa 5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 27-in (73) s/n 114043 & 114044. (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slp body s/n 2646. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n 74742-3. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators s/n 74200. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0406006. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guilberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Shop-built mobile doghouse trailer s/n MWS200902; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n X06B070573. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & gloved incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricantsslings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star. S/N 2WLPCD2G5YK960249, FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks. c/w 1 Used Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 300-hp @ 2100 s/n 9TL21455. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 2E9RSZ5Z96R073007. Tandemsteer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission;



Saskatchewan Personal Property Registry Search Result

General Property

Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.

(1) USED 2003 Western Star Model 4900SA Tri Drive Log Truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; C-15 diesel engine rated at 500-hp s/n MBN05778. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKlissick Fig 83-A 24, 100-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n 059-1764. (1) Set Gill Model 500 - hydraulic power tubing tongs s/n 500-896. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity 06099-1, 2. Schwab's Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN 1551. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI Model Double double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve s/n 60986-01. BOP hoses, valves, hoses, studs, nuts, etc. (2) HI-Kalibre safety valves, 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubingspider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0606136. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Gulbberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assem. w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2010 Shop-built mobile doghouse trailer s/n MWS201002; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & lght plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear s/n M11C110969 Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star Model 4964SX tandem axel truck s/n 2WKPPDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 500-hp @ 177 rpm. > Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2007 Crane Model DR0106 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square tubing stiff mast, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly KE-5042. Drawworks; Cooper double-drum drawworks w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver s/n 1949. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm s/n 06R0949883. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off s/n M5610A. Namco Model right angle drive box. Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2000 Western Star Model 4986FX tridrive pump truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; Cat Model 3406E diesel engine rated at 550-hp; 14.6-litre s/n 2WS19060. Transmission; Eaton Model RTLO-20918B, 18 speed manual transmission. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-l s/n 32700063. > Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two compartments w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKlissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 06-349-24. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P.



Saskatchewan
Personal Property Registry
Search Result

General Property

Equipment; IEI double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ (2) 51-mm outlet valves s/n 48558-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) HI-Kalibre safety 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3½-in (89-mm). Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n MSM04681. (1) set AOT Type TA65, 65-ton 60-mm (2-3/8 in) tubing elevators s/n 63068. (1) set AOT Type TA-100; 100-ton 73-mm (2-7/8 in) tubing elevators s/n 87752. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1017020. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600 /900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axles equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n 75ZXL03.1GTB. Incinolet Model WB electric toilet.

(1) USED Rig Carrier; 2008 Iron tech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axel equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ ABS braking system. Meritor single reduction tri-drive rear axels rated at 10,432-kg / axel mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Irontech Model 72-140S freestanding stiff mast 72-ft 21.9-m), 150,000-lbs (66,720- daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly s/n MO-45-07. Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks (splash-cooled & belt driven) c/w crown-saver & brakes s/n 9.KK.01.08. Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 665- hp @ 2300-rpm. Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. Rig-up right angle gear box s/n GP.54.08. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043.

(1) USED 2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK45PN91874. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ airoperated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Detroit Series 60, 14-litre turbo diesel drive engine, rated @ 500-hp @ 1800 rpm s/n 05R0801867. Transmission; Allison Model 4700 OFS 5-speed automatic transmission w/ power take-off. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-Lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ 176-bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 1759866. (1) Set Tillery & Parks Type 5890-hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1240. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (API) double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 05-059. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) HI-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body (1) Set Mission shallow hand slips w/ 60 to 89-mm dies (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in (4) Rod wrenches, 5/8-in to 1-in 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet.

(1) USED 1988 Western Star s/n 2WKPDCCJ8WK950999 Model 4964FX tandem-axel truck w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R24.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model 3406 diesel engine rated @ 490-hp s/n 6TS16393. Transmission; Eaton Model RTLO- 18718B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye



Saskatchewan Personal Property Registry Search Result

General Property

wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, highangle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. (1) USED Rig Carrier; 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n 1CYEGW6879T049305. Tandemsteer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n 09.08.015. Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm. s/n 06R1006764. Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. Namco Model M94-RA45041 right angle drive box s/n N07-16002. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc.

(1) USED 2000 Freightliner s/n 1FUUF7WB1YPG53125 Model T800 truck equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Engine; ISX 530 diesel engine rated at 500- hp @ 2000-rpm s/n 79089324. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 875792. (1) Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 150T072/71. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN s/n 28528. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n K08-092. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1208060. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Gulberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubular rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over hydraulic operation, equipped with approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 55- kW generator c/w day tank, electric start & switchgear s/n 49606. Incinolet Model WB electric toilet.

(1) USED 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ air -operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chocks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm s/n 6NZ87182. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, builtin tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1978 Cardwell Model B140 s/n 78244, 4- axle self-propelled back-in carrier. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n CE-4544. Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown. Engine; Detroit Series 60 14.0-L turbocharged



Saskatchewan Personal Property Registry Search Result

General Property

diesel drive engine rated @ 665-hp @ 2300 rpm s/n 04RE102775. Transmission; Allison Model CLT750 torque-tube drive automatic transmission s/n 2510014086. > Bevel right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. > Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2006 Western Star Tri Drive s/n 5KJRALCV86PV36016 w/ springride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ airride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; > McKlissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. (1) Set Gill Type 500 hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 mobile doghouse trailer s/n 2C9H846D812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinoleet Model WB electric toilet. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1980 Franks Type 300 s/n 196087 free standing 4-axle self-propelled back-in carrier. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on new 445/65-22.5 tires with approximately 15-mm of tread remaining complete with ABS braking system & Reyco suspension. Meritor tandem-drive Rockwell rear axels equipped with polished aluminum wheels mounted on 11R/24.5 tires with approximately 18-mm of tread remaining complete with ABS braking system. Singleman insulated cab w/ air-ride seat, fan, controls & gauges, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1980 Franks Model KR069 1405, 21-m (69-ft) square-tubing free standing stiff mast, 53,400-daN (120,000-lbs) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & 4 sheave crown assembly w/ (3) 20-in sheaves grooved for 3/4-in line & (1) 16-in sheave grooved for 1/2-in line. Rear stabilization shoe with leveling jacks and swing out stabilization arms s/n J12655. > Drawworks; Frank Model double-drum 42X10 drawworks. Main drum; 254-mm (10-in) x 1,066-mm (42-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, disc brake & crown saver. Engine; Detroit Series 50 8.5-litre turbocharged diesel drive engine rated at 315-hp @ approximately 2,100 rpm s/n 04R0023225. Transmission; Allison Model HT750 torque-tube drive automatic transmission & Chelsea PTO drive. Right angle drive box. Drill & Sandline; 1-inch (25.4-mm) x 3,000-m drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 250-gal tank, hydraulic power unit complete with Girdel hydraulic services pump, thermal exchanger, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, power tong, deck winches, etc.

(1) USED2003 Freightliner Model FLD120 truck s/n 1FVPLAV83PL04474 equipped w/ Rock Well spring-ride front axel rated at 14,000-lbs mounted on polished aluminum wheels fitted with 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 55,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R24.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; (2) cylinder hydraulic live roll, driver's air-ride seat, tire chains, chocks. Engine; Cat Model C15 diesel engine rated at 450-hp @ approximately 2,100-rpm s/n 6N274661. Transmission; Eaton Fuller Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 6-in c/w forged fluid end, quick-change heads, 7-valve, 5,000-psi manifold, pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 30-m³ 188-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, steam coils, fill lines, man lift, external tank gauge, chiksans & mud. Condition Assessment; Mud system and tank is new (not truck). Drop box. Spark arrestors. Stretched frame Traveling & Rig Floor Equipment; McKlissick Model Fig. 83A, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n W12163. (1) set Foster Type 593-R hydraulic power tubing tongs. (1) set Oil Country 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 38028391-04A/04B. Clipper Model weight indicator, 0-90,000- daN, calibrated to 62,000-dan s/n KCW00205. Cavins depthometer for 14.28-mm.B.O.P. Equipment; IEI (Control Tech) Model DBL double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n CT3465. Spool, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp w/ 51-mm outlet



Saskatchewan Personal Property Registry Search Result

General Property

valve s/n API33911. Accumulator; 22-gal class II rig mounted accumulator system. BOP hoses, valves, hoses, studs, nuts, etc. (2) HI-Kalibre safety valves, 73 & 89-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set 2 ?-in Type CL Upset 100-ton tubing Elevators s/n 36737080-01. (1) set 2 ?-in Type CL Upset 100-ton tubing elevators s/n 34353023-04. Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0611007. > (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubular rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 International Model 5900i 6X4 Series s/n 1HTXRAET11J086477 tandem-axle tractor powered by Cummins Model N14460E1 turbo charged diesel engine rated at 450-hp @ 2,100 rpm. Engine is unitized with w/ Eaton Fuller 10 speed manual transmission & PTO. Tractor has single steer front axle mounted on 12R/22.5 tires w/ approximately 14-mm of tread remaining. Tractor has Tandem rear axles mounted on 11R24.5 tires w/ approximately 18-m of tread remaining. Truck also equipped w/ rear exterior lighting, rear hitch, drivers air ride seat, air ride suspension. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand with slider, tong rack, lubricator rack, etc. Condition Assessment; Truck frame stretched to accommodate deck and slider for BOP stand. Whole unit recently painted.

(1) USED 2012 MWS Model MWS s/n 2M91DV3B7CC185008 mobile doghouse trailer approximately 8-ft wide x 32-ft long. Trailer is equipped with spring-ride tandem 10,000-lbs axels mounted on dual wheels fitted with 225/70R22.5 tires. Change shack/ doghouse section; (8) lockers, knowledge box, fridge, desk, electric heater, storage benches, locking storage cabinets & fluorescent interior lighting. Light plant section; utility bench, vise, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinole electric toilet. Light Plant; Isuzu Model NEMA powered by Isuzu Model 4BG1T 4-cylinder diesel unitized with Stamford 42-kW generator c/w day tank, electric start & switchgear s/n A05D389308. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED 2013 DynaWinch Model CD3-323 s/n 20856 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting s/n 24030. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2- speed hydraulic motor. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & VRoller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2013 International Paystar Model 5918x6 tri drive truck s/n 1HTXVSJT8DJ146041; powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise.

(1) USED 2005 DynaWinch Model CDC-323 s/n 21270 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16- in sheave grooved for ?-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Last inspected April 13, 2010; mast s/n 21270. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by hydraulic motor s/n 054381889. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by hydraulic motor s/n 054081345. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth.



Saskatchewan Personal Property Registry Search Result

General Property

- (1) USED 2005 International Paystar Model 5900I 8x6 Tri-axle truck s/n 1HTXTAPT26J225893 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp (15,026-metered hours) unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with approximately 10-mm of tread & polished aluminum wheels with air - operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.
- (1) USED 2007 DynaWinch s/n 21681 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ 7-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting; mast s/n 21681. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E -line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.
- (1) USED 2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021; powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chocks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.
- (1) USED 2012 DynaWinch s/n 33844 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headche rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 62-ft overall working height rated for 33,500-lb safe working load single line w/ guy lines, 67,000-lbs total mast static load. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) twostage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility s/n 23844. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.
- (1) USED 2011 International Model Paystar tandemsteer tri-drive truck s/n 1HTXVAPT2BJ196710 ; powered by Cummins Model ISX600 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chocks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.
- (1) USED 2013 International Paystar Model 5918x6 tri-drive truck s/n 1HTNWSMT3DJ603273 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Jolly Engineering Services Model JES-300 mud pump; 5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber;



**Saskatchewan
Personal Property Registry
Search Result**

General Property

Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 120. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.
 (1) USED 1996 Western Star Model tri drive truck s/n 2WLNCCFF0TK941183; powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Gardner Denver Model TEE mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 precharge pump & control console. Pump is energized by drop box via truck PTO s/n 0010377. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.

History - Setup

Registration Type: Personal Property Security Agreement
Registration Date: 03-Jul-2014 10:16:26

Registration #: 301208502
Transaction #: 1
Expiry Date: 03-Jul-2024

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 |
| | Canada |

Secured Party

| | |
|--|--|
| Item #: 1 | Address: 600, 444 - 7 Avenue S.W. |
| Party ID: 151816583 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P0X8 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party

| | |
|---|----------------------------------|
| Item #: 1 | Address: 46272 Highway 56 |
| Party ID: 152122503 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Mustang Well Services Ltd. | Canada |
| Item #: 2 | Address: 46272 Highway 56 |
| Party ID: 152122504 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: MRBD Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2006 |
| Serial Type: Motor Vehicle | Make/Desc.: Rig Carrier low rider 5 axel |
| Serial #: 2E9RSZ5Z36R073004 | Model: |
| Override: No | Color: |
| Item #: 2 | Year: 2000 |
| Serial Type: Motor Vehicle | Make/Desc.: Freightliner Conventional Truck |
| Serial #: 1FVUF7WB1YPG53125 | Model: |
| Override: No | Color: |
| Item #: 3 | Year: 2009 |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|--|---|
| Serial Type: Trailer Serial #: MWS200902 Override: No | Make/Desc.: Mobile doghouse trailer Model: Color: |
| Item #: 4 Serial Type: Motor Vehicle Serial #: 2WLPCD2G5YK960249 Override: No | Year: 2000 Make/Desc.: Western Star FL941 Model: Color: |
| Item #: 5 Serial Type: Motor Vehicle Serial #: 2E9RSZ5Z96R073007 Override: Yes | Year: 2006 Make/Desc.: Rig Carrier low rider 5 axel Model: Color: |
| Item #: 6 Serial Type: Motor Vehicle Serial #: 5KKPALAV83PL79816 Override: No | Year: 2003 Make/Desc.: Western Star 4900SA Tri Drive Log Truck Model: Color: |
| Item #: 7 Serial Type: Trailer Serial #: MWS201002 Override: No | Year: 2010 Make/Desc.: Mobile doghouse trailer Model: Color: |
| Item #: 8 Serial Type: Motor Vehicle Serial #: 2WKPPDDJH4YK962165 Override: No | Year: 2000 Make/Desc.: Western Star 5964SX tandem axel truck Model: Color: |
| Item #: 9 Serial Type: Motor Vehicle Serial #: 1CYEGW6837T047676 Override: Yes | Year: 2007 Make/Desc.: Crane DR0106 5 axel carrier Model: Color: |
| Item #: 10 Serial Type: Motor Vehicle Serial #: 2WLPSDCJ3YK962739 Override: No | Year: 2000 Make/Desc.: Western Star 4986FX tridrive pump truck Model: Color: |
| Item #: 11 Serial Type: Trailer Serial #: 2M91DV3B7CC185001 Override: No | Year: 2012 Make/Desc.: Shop-built mobile doghouse trailer Model: Color: |
| Item #: 12 Serial Type: Motor Vehicle Serial #: 1FUX3EDB3SP599554 Override: Yes | Year: Make/Desc.: Highway Tandem-axel truck Model: Color: |
| Item #: 13 Serial Type: Motor Vehicle Serial #: 2R9R4CF128E690061 Override: No | Year: 2008 Make/Desc.: Iron tech SR242 5-axel carrier Model: Color: |
| Item #: 14 Serial Type: Motor Vehicle Serial #: 5KJRALCK45PN91874 Override: No | Year: 2005 Make/Desc.: Western Star 4964SA tri-drive truck Model: Color: |
| Item #: 15 Serial Type: Trailer Serial #: MWS004 Override: No | Year: 1998 Make/Desc.: Shop-built mobile doghouse trailer Model: Color: |
| Item #: 16 Serial Type: Trailer Serial #: 2WKPPDDCJ8WK950999 Override: No | Year: 1988 Make/Desc.: Western Star 4964FX tandem-axel truck Model: Color: |
| Item #: 17 Serial Type: Motor Vehicle Serial #: 1CYEGW6879T049305 Override: No | Year: 2009 Make/Desc.: Crane DR20106 5-axel carrier Model: Color: |



Saskatchewan
Personal Property Registry
Search Result

Serial Property

| | |
|--|--|
| Item #: 18 Serial Type: Motor Vehicle Serial #: 1FUUF7WB1YPG53125 Override: Yes | Year: 2000 Make/Desc.: Freightliner T800 Truck Model: Color: |
| Item #: 19 Serial Type: Trailer Serial #: 2S9NL666491022197 Override: No | Year: 2009 Make/Desc.: Southland CHT22500-9535-84 doghouse trailer Model: Color: |
| Item #: 20 Serial Type: Motor Vehicle Serial #: 1FVPA6AV43PL05431 Override: No | Year: 2003 Make/Desc.: Freightliner Columbia tandem axel Model: Color: |
| Item #: 21 Serial Type: Motor Vehicle Serial #: 78244 Override: Yes | Year: 1978 Make/Desc.: Cardwell B140 4 axel carrier Model: Color: |
| Item #: 22 Serial Type: Motor Vehicle Serial #: 5KJRALCV86PV36016 Override: No | Year: 2006 Make/Desc.: Western Star Tri-drive Model: Color: |
| Item #: 23 Serial Type: Trailer Serial #: 2C9HB46D812044028 Override: No | Year: 2001 Make/Desc.: Doghouse trailer Model: Color: |
| Item #: 24 Serial Type: Motor Vehicle Serial #: 196087 Override: Yes | Year: 1980 Make/Desc.: Franks Type 300 free standing carrier Model: Color: |
| Item #: 25 Serial Type: Motor Vehicle Serial #: 1FVPALAV83PL04474 Override: No | Year: 2003 Make/Desc.: Freightliner FLD120 truck Model: Color: |
| Item #: 26 Serial Type: Motor Vehicle Serial #: 1HTXRAET11J086477 Override: No | Year: 2001 Make/Desc.: International 5900i 6x4 series tractor Model: Color: |
| Item #: 27 Serial Type: Trailer Serial #: 2M91DV3B7CC185008 Override: No | Year: 2012 Make/Desc.: MWS mobile doghouse trailer Model: Color: |
| Item #: 28 Serial Type: Trailer Serial #: 20856 Override: No | Year: 2013 Make/Desc.: DynaWinch CD3-323 Model: Color: |
| Item #: 29 Serial Type: Motor Vehicle Serial #: 1HTXVSJT8DJ146041 Override: No | Year: 2013 Make/Desc.: International Paystar 5918x6 tri drive truck Model: Color: |
| Item #: 30 Serial Type: Trailer Serial #: 21270 Override: No | Year: 2005 Make/Desc.: DynaWinch CDC-323 Model: Color: |
| Item #: 31 Serial Type: Motor Vehicle Serial #: 1HTXTAPT26J225893 Override: No | Year: 2005 Make/Desc.: International Paystar 59001 tri axel truck Model: Color: |
| Item #: 32 Serial Type: Trailer Serial #: 21681 | Year: 2007 Make/Desc.: DynaWinch recorder body Model: |



Saskatchewan Personal Property Registry Search Result

Serial Property

| | | | |
|---------------------|-------------------|--------------------|---|
| Override: | No | Color: | |
| Item #: | 33 | Year: | 2007 |
| Serial Type: | Motor Vehicle | Make/Desc.: | International 5618 7x6 tri-axel truck |
| Serial #: | 1HTXSAPT67J407021 | Model: | |
| Override: | No | Color: | |
| Item #: | 34 | Year: | 2012 |
| Serial Type: | Trailer | Make/Desc.: | DynaWinch recorder body |
| Serial #: | 33844 | Model: | |
| Override: | No | Color: | |
| Item #: | 35 | Year: | 2011 |
| Serial Type: | Motor Vehicle | Make/Desc.: | International Paystar tri-drive truck |
| Serial #: | 1HTXVAPT2BJ196710 | Model: | |
| Override: | No | Color: | |
| Item #: | 36 | Year: | 2013 |
| Serial Type: | Motor Vehicle | Make/Desc.: | International Paystar 5918x6 tridrive truck |
| Serial #: | 1HTNWSMT3DJ603273 | Model: | |
| Override: | No | Color: | |
| Item #: | 37 | Year: | 1996 |
| Serial Type: | Motor Vehicle | Make/Desc.: | Western Star tri drive truck |
| Serial #: | 2WLNCCFF0TK941183 | Model: | |
| Override: | No | Color: | |

General Property

(1) Used 2006 Rig Carrier, low-rider, 5-axel self-propelled back-in carrier s/n 2E9RSZ5Z36R073004. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65/22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Attached with 1 Used 2006, SJ Petro, XJ250S Double-drum drawworks s/n 06R0886197 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, SJ Petro bankd 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-OMatic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @425-hp @ 32000 rpm. Transmission; Allison Model HT750-DRDDB torque-tube-drive automatic 5-speed transmission w/ power tak-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear leveling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) Used 2000 Freightliner, Conventional truck equipped w/ Rock Well Model 941 s/n 1FVUF7WB1YPG53125 spring-ride front axel rate at 16,000-lb mounted on 385/65R22.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 19,000-lbs each, equipped w/ airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Truck is c/w fuel tanks & locking storage compartments. Engine; Cummins Model Signature 600 15-L diesel engine rated at 600-hp @ 2000-rpm s/n 14004589 w/ PAS turbo Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n 70333492-02. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700051. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses s/n 16980. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 06-353-54. (1) Set Foster Model 93R hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 05254-1, 2. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1237 Cavins depthometer for 14.28-mm. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 21,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 27-in (73) s/n 114043 & 114044. (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body s/n 2646. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n 74742-3. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators s/n 74200. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0406006. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guilberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Shop-built mobile doghouse trailer s/n MWS200902; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog



Saskatchewan Personal Property Registry Search Result

General Property

house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n X06B070573. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricantsslings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star. S/N 2WLPCD2G5YK960249, FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks. c/w 1 Used Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 300-hp @ 2100 s/n 9TL21455. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 2E9RSZ5Z96R073007. Tandemsteer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.

(1) USED 2003 Western Star Model 4900SA Tri Drive Log Truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; C-15 diesel engine rated at 500-hp s/n MBN05778. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKlissick Fig 83-A 24, 100-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n 059-1764. (1) Set Gill Model 500 - hydraulic power tubing tongs s/n 500-896. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity 06099-1, 2. Schwab's Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN 1551. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI Model Double double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve s/n 60986-01. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubingspider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0606136. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assem. w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2010 Shop-built mobile doghouse trailer s/n MWS201002; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear s/n M11C110969 Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star Model 4964SX tandem axel truck s/n 2WKPDDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 500-hp @ 177 rpm. > Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2007 Crane Model DR0106 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel



Saskatchewan Personal Property Registry Search Result

General Property

tanks, wing walk and adjustable working platform. Mast; 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square tubing stiff mast, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly KE-5042. Drawworks; Cooper double-drum drawworks w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver s/n 1949. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm s/n 06R0949883. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off s/n M5610A. Namco Model right angle drive box. Drill & Sandline; 7/8-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2000 Western Star Model 4986FX tri-drive pump truck s/n 2WLP5DCJ3YK962739. Western Model WS16 springride front axle rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, fuel tanks, revolving beacons, chocks etc. Engine; Cat Model 3406E diesel engine rated at 550-hp; 14.6-litre s/n 2WS19060. Transmission; Eaton Model RTLO-20918B, 18 speed manual transmission. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-l s/n 32700063. > Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowle charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two compartments w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 06-349-24. (1) Gill Model 500 hydraulic power tubing tongs s/n 500-1147. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ (2) 51-mm outlet valves s/n 48558-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n MSM04681. (1) set AOT Type TA65, 65-ton 60-mm (2-3/8 in) tubing elevators s/n 63068. (1) set AOT Type TA-100; 100-ton 73-mm (2-7/8 in) tubing elevators s/n 87752. Trico Model 554-578-600, 25-ton rod hook w/ devis s/n H1017020. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600 /900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubular rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2012 Shop-built mobile doghouse trailer s/n 2M91DV3B7CC185001; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air - operated brakes & 225/70R22.5 tires w/ approximately 16-mm of tread remaining. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n 75ZXLO3.1GTB. Incinolet Model WB electric toilet.

(1) USED Highway tandem-axle truck equipped w/ Rock Well Model 941 s/n 1FUX3EDB3SP599554 springride front axle mounted on 385/65R22.5 tires w/ approximately 8-mm of tread remaining, polished aluminum wheels, air -operated brakes & ABS braking system. Tandem rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on 11R22.5 tires w/ approximately 10-mm of tread remaining, polished aluminum wheels, air - operated brakes & ABS braking system. Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 350-hp @ 2100 rpm s/n 9CK15423. Transmission; Eaton Model RTLO-16913B, 13-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 2008 Iron tech Model SR242 5-axle self-propelled back-in carrier s/n 2R9R4CF128E690061 w/ tandem-steer front axels rated at 9,072-kg / axle equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ ABS braking system. Meritor single reduction tri-drive rear axels rated at 10,432-kg / axle mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Irontech Model 72-140S freestanding stiff mast 72-ft 21.9-m), 150,000-lbs (66,720- daN) hook-load capacity w/ 4 lines, square-tube construction, primary & secondary fall arrest systems, mounted ladder, 2-in standpipe & five-sheave crown assembly s/n MO-45-07. Rig Up 106-cm (42-in) x 25.4-cm (10-in) double-drum drawworks (splash-cooled & belt driven) c/w crown-saver & brakes s/n 9.KK.01.08. Engine; Detroit Series 60 14-litre turbocharged diesel drive engine rated at 665- hp @ 2300-rpm. Transmission; Allison Model 4700 OFS, torque-tube-drive automatic transmission w/ power take-off. Rig-up right angle gear box s/n GP.54.08. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Irontech Class II carrier-mounted 22-gal accumulator system s/n AS08IT00043.

(1) USED 2005 Western Star Model 4964SA tri-drive truck s/n 5KJRALCK45PN91874. Meritor Model FL941 spring-ride front axle rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R/22.5 tires w/ air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs w/ air-ride suspension mounted on polished aluminum wheels w/



Saskatchewan Personal Property Registry Search Result

General Property

11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Detroit Series 60, 14-litre turbo diesel engine, rated @ 500-hp @ 1800 rpm s/n 05R0801867. Transmission; Allison Model 4700 OFS 5-speed automatic transmission w/ power take-off. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-Lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ 176-bbl) mud tank with settling-trough, two compartments, two guns w/valves, mix hopper, degasser, 118-m of 50.8-mm line pipe w/ chiksans, 50.8-mm & 101-mm mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 1759866. (1) Set Tillery & Parks Type 5890-hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weldless elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1240. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (API) double-gate ram Preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 05-059. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body (1) Set Mission shallow hand slips w/ 60 to 89-mm dies (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in (4) Rod wrenches, 5/8-in to 1-in 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 1998 Shop-built mobile doghouse trailer s/n MWS004; approximately 8-ft wide x 26-ft long mounted on tandem 10,000-lbs axels c/w change shack & light plant section. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear. Incinoleet Model WB electric toilet.

(1) USED 1988 Western Star s/n 2WKPDDCJ8WK950999 Model 4964FX tandem-axel truck w/ Freightliner Model FL941 spring-ride front axel rated at 20,000-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Freightliner Model RT 44 145P tandem drive air-ride rear axels rated at 22,000-lbs each equipped w/ polished aluminum wheels mounted on 11R24.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Cat Model 3406 diesel engine rated @ 490-hp s/n 6TS16393. Transmission; Eaton Model RTLO- 18718B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA selfretracting lifelines, SALA rig-rider, highangle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n 1CYEGW6879T049305. Tandemsteer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n 09.08.015. Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm. s/n 06R1006764. Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. Namco Model M94-RA45041 right angle drive box s/n N07-16002. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc.

(1) USED 2000 Freightliner s/n 1FUUF7WB1YPG53125 Model T800 truck equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; ISX 530 diesel engine rated at 500- hp @ 2000-rpm s/n 79089324. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 875792. (1) Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 150T072/71. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN s/n 28528. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n K08-092. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set



Saskatchewan Personal Property Registry Search Result

General Property

AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1208060. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, slinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over hydraulic operation, equipped with approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 55- kW generator c/w day tank, electric start & switchgear s/n 49606. Incinolet Model WB electric toilet.

(1) USED 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ air -operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm s/n 6NZ87182. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1978 Cardwell Model B140 s/n 78244, 4- axle self-propelled back-in carrier. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 44S/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft) square-tubing stiff mast, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n CE-4544. Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n 04RE102775. Transmission; Allison Model CLT750 torque-tube drive automatic transmission s/n 2510014086. > Bevel right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. > Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2006 Western Star Tri Drive s/n 5KJRALCV86PV36016 w/ springride front axel mounted on polished aluminum wheels w/ 42S/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ airride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & Mud Tank; Steel-fabricated 32-m³ 200-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; > McKissick Fig 83AWT-20, 75-ton travelling block assembly w/ (3) 20-in sheaves grooved for 1-in line. (1) Set Gill Type 500 hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, slinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 mobile doghouse trailer s/n 2C9HB46D812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incinolet Model WB electric toilet. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits,



Saskatchewan Personal Property Registry Search Result

General Property

safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1980 Franks Type 300 s/n 196087 free standing 4-axle self-propelled back-in carrier. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on new 445/65-22.5 tires with approximately 15-mm of tread remaining complete with ABS braking system & Reyco suspension. Meritor tandem-drive Rockwell rear axels equipped with polished aluminum wheels mounted on 11R/24.5 tires with approximately 18-mm of tread remaining complete with ABS braking system. Singleman insulated cab w/ air-ride seat, fan, controls & gauges, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1980 Franks Model KR069 1405, 21-m (69-ft) square-tubing free standing stiff mast, 53,400-daN (120,000-lbs) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & 4 sheave crown assembly w/ (3) 20-in sheaves grooved for 3/4-in line & (1) 16-in sheave grooved for 1/2-in line. Rear stabilization shoe with leveling jacks and swing out stabilization arms s/n J12655. > Drawworks; Frank Model double-drum 42X10 drawworks. Main drum; 254-mm (10-in) x 1,066-mm (42-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, disc brake & crown saver. Engine; Detroit Series 50 8.5-litre turbocharged diesel drive engine rated at 315-hp @ approximately 2,100 rpm s/n 04R0023225. Transmission; Allison Model HT750 torquetube drive automatic transmission & Chelsea PTO drive. Right angle drive box. Drill & Sandline; 1-inch (25.4-mm) x 3,000-m drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 250-gal tank, hydraulic power unit complete with Girdel hydraulic services pump, thermal exchanger, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, power tong, deck winches, etc.

(1) USED 2003 Freightliner Model FLD120 truck s/n 1FVPALAV83PL04474 equipped w/ Rock Well spring-ride front axel rated at 14,000-lbs mounted on polished aluminum wheels fitted with 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 55,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R24.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; (2) cylinder hydraulic live roll, driver's air-ride seat, tire chains, chocks. Engine; Cat Model C15 diesel engine rated at 450-hp @ approximately 2,100-rpm s/n 6NZ74661. Transmission; Eaton Fuller Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 6-in c/w forged fluid end, quick-change heads, 7-valve, 5,000-psi manifold, pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 30-m³ 188-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, steam coils, fill lines, man lift, external tank gauge, chocks & mud. Condition Assessment; Mud system and tank is new (not truck). Drop box. Spark arrestors. Stretched frame Traveling & Rig Floor Equipment; McKissick Model Fig. 83A, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n W12163. (1) set Foster Type 593-R hydraulic power tubing tongs. (1) set Oil Country 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 38028391-04A/04B. Clipper Model weight indicator, 0-90,000- daN, calibrated to 62,000-dan s/n KCW00205. Cavins depthometer for 14.28-mm.B.O.P. Equipment; IEI (Control Tech) Model DBL double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n CT3465. Spool, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp w/ 51-mm outlet valve s/n API33911. Accumulator; 22-gal class II rig mounted accumulator system. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 89-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set 2 ?-in Type CL Upset 100-ton tubing Elevators s/n 36737080-01. (1) set 2 ?-in Type CL Upset 100-ton tubing elevators s/n 34353023-04. Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0611007. > (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 International Model 5900i 6X4 Series s/n 1HTXRAET11J086477 tandem-axle tractor powered by Cummins Model N14460E1 turbo charged diesel engine rated at 450-hp @ 2,100 rpm. Engine is unitized with w/ Eaton Fuller 10 speed manual transmission & PTO. Tractor has single steer front axle mounted on 12R/22.5 tires w/ approximately 14-mm of tread remaining. Tractor has Tandem rear axles mounted on 11R24.5 tires w/ approximately 18-m of tread remaining. Truck also equipped w/ rear exterior lighting, rear hitch, drivers air ride seat, air ride suspension. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand with slider, tong rack, lubricator rack, etc. Condition Assessment; Truck frame stretched to accommodate deck and slider for BOP stand. Whole unit recently painted.

(1) USED 2012 MWS Model MWS s/n 2M91DV3B7CC185008 mobile doghouse trailer approximately 8-ft wide x 32-ft long. Trailer is equipped with spring-ride tandem 10,000-lbs axels mounted on dual wheels fitted with 225/70R22.5 tires. Change shack/ doghouse section; (8) lockers, knowledge box, fridge, desk, electric heater, storage benches, locking storage cabinets & fluorescent interior lighting. Light plant section; utility bench, vise, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & incinotelet electric toilet. Light Plant; Isuzu Model NEMA powered by Isuzu Model 4BG1T 4-cylinder diesel unitized with Stamford 42-kW generator c/w day tank, electric start & switchgear s/n A05D389308. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED 2013 DynaWinch Model CD3-323 s/n 20856 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and



Saskatchewan Personal Property Registry Search Result

General Property

locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for ¾-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting s/n 24030. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of ¾-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2- speed hydraulic motor. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2013 International Paystar Model 5918x6 tri drive truck s/n 1HTXVSJT8DJ146041; powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKlissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 ½-in dump bailers, 3 ½-in & 5 ½-in lubricators, Vanoil 5 ½-in R45 x 3000-psi flange, 3 ½-in x 3,000-psi BOP, 5 ½-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 ½-in x 5 ½-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise.

(1) USED 2005 DynaWinch Model CDC-323 s/n 21270 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for ¾-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Last inspected April 13, 2010; mast s/n 21270. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by hydraulic motor s/n 054381889. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of ¾-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by hydraulic motor s/n 054081345. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth.

(1) USED 2005 International Paystar Model 5900I 8x6 Tri-axle truck s/n 1HTXTAPT26J225893 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp (15,026-metered hours) unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with approximately 10-mm of tread & polished aluminum wheels with air - operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels. Lot of support equipment including; McKlissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 ½-in dump bailers, 3 ½-in & 5 ½-in lubricators, Vanoil 5 ½-in R45 x 3000-psi flange, 3 ½-in x 3,000-psi BOP, 5 ½-in x 5,000-psi BOP w/ nace trim, Vanoil 4 ½-in x 5 ½-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2007 DynaWinch s/n 21681 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for ¾-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting; mast s/n 21681. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of ¾-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E -line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021; powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKlissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 ½-in dump bailers, 3 ½-in & 5 ½-in lubricators, Vanoil 5 ½-in R45 x 3000-psi flange, 3 ½-in x 3,000-psi BOP, 5 ½-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 ½-in x 5 ½-in x 3,000-psi flotee, set of CSS bow spring logging



**Saskatchewan
Personal Property Registry
Search Result**

General Property

centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2012 DynaWinch s/n 33844 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 62-ft overall working height rated for 33,500-lb safe working load single line w/ guy lines, 67,000-lbs total mast static load. Mast is equipped w/ (1) 16-in sheave grooved for 7-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for 7-in winch line, (2) twostage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility s/n 23844. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of 7-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for 7-in E-line c/w encoders & V-Roller guide assembly (sideto-side movement), load cell & electronic depth counter.

(1) USED 2011 International Model Paystar tandemsteer tri-drive truck s/n 1HTXVAPT2BJ196710 ; powered by Cummins Model ISX600 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for 7-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2013 International Paystar Model 5918x6 tridrive truck s/n 1HTNWSMT3DJ603273 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Jolly Engineering Services Model JES-300 mud pump; 5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Otoco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 120. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

(1) USED 1996 Western Star Model tri drive truck s/n 2WLNCCFF0TK941183; powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Garder Denver Model TEE mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Otoco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 precharge pump & control console. Pump is energized by drop box via truck PTO s/n 0010377. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.

History - Amendment

**Registration #: 301208502
Transaction #: 2**

Amendment Date: 15-Jun-2017 15:20:02

Event Type: Amendment
Transaction Reason: Regular

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 |
| | Canada |



Saskatchewan Personal Property Registry Search Result

Serial Property

Action: Delete
Item #: 12
Serial Type: Motor Vehicle
Serial #: 1FUX3EDB3SP599554
Override: Yes

Year:
Make/Desc.: Highway Tandem-axel truck
Model:
Color:

General Property

(1) Used 2006 Rig Carrier, low-rider, 5-axel self-propelled back-in carrier s/n 2E9RSZ5Z36R073004. Tandem-steer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65/22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Attached with 1 Used 2006, SJ Petro, XJ250S Double-drum drawworks s/n 06R0886197 w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, SJ Petro bankd 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-OMatic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @425-hp @ 32000 rpm. Transmission; Allison Model HT750-DRDDB torque-tube-drive automatic 5-speed transmission w/ power tak-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic Syste; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) Used 2000 Freightliner, Conventional truck equipped w/ Rock Well Model 941 s/n 1FVUF7WB1YPG53125 spring-ride front axel rate at 16,000-lb mounted on 385/65R22.5 tires w/ polished aluminum wheels, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 19,000-lbs each, equipped w/ airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels, air -operated brakes & ABS braking system. Truck is c/w fuel tanks & locking storage compartments. Engine; Cummins Model Signature 600 15-L diesel engine rated at 600-hp @ 2000- rpm s/n 14004589 w/ PAS turbo Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission s/n 70333492-02. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb s/n 32700051. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses s/n 16980. Traveling & Rig Floor Equipment; McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 7-in line s/n 06-353-54. (1) Set Foster Model 93R hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 05254-1, 2. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN s/n C1237 Cavins depthometer for 14.28-mm. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n 06-197. Spool, 179-mm (7-1/16 in) x 21,000-kPa 5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, (2) Hi-Kalibre safety valves, 27-in (73) s/n 114043 & 114044. (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slp body s/n 2646. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies s/n 74742-3. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators s/n 74200. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators s/n M918743. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0406006. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Shop-built mobile doghouse trailer s/n MWS200902; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel engine unitized with Stamford 30-kW generator c/w day tank, electric start & switchgear s/n X06B070573. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricantsslings, chains, w/ electric heater, grinder, vice, work benches & Incinoleet toilet.

(1) USED 2000 Western Star. S/N 2WLPCD2G5YK960249, FL941 spring-ride front axel rated at 16,600-lbs equipped with polished aluminum wheels mounted on 315/80R22.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 40,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks. c/w 1 Used Cat Model 3176 10.3-litre turbo-charged diesel engine rated @ 300-hp @ 2100 s/n 9TL21455. Transmission; Eaton 8-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2006 Exact Model Low-Rider 5- axle self-propelled back-in carrier S/N 2E9RSZ5Z96R073007. Tandemsteer front axels rated at 20,000-lb each, equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels rated at 23,000-lb each, mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 22-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2006 Cheyenne 21.9-m (72-ft) square-tubing stiff mast s/n 08-06-041, Mdl. 72-150, 66,720-daN hook-load capacity w/ 4-lines,



Saskatchewan Personal Property Registry Search Result

General Property

primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly. Drawworks; Kin double-drum drawworks. w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n SN-06R0911167. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off. Namco Model right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc.

(1) USED 2003 Western Star Model 4900SA Tri Drive Log Truck s/n 5KKPALAV83PL79816. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridrive air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; C-15 diesel engine rated at 500-hp s/n MBN05778. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission s/n S0079250. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 26-m³ (163.5-bbl) mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; McKlissick Fig 83-A 24, 100-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n 059-1764. (1) Set Gill Model 500 - hydraulic power tubing tongs s/n 500-896. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity 06099-1, 2. Schwab's Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN 1551. Cavins depthometer for 14.28-mm sandline. B.O.P. Equipment; IEI Model Double double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 2-in (51-mm) outlet valve s/n 60986-01. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 27-in (73-mm). (1) Lot of saver subs, 27-in (73-mm) & 3 1/2-in (89-mm). Tubing & Rod Handling Equipment; (1) Cavins Model C-HD 82.5-ton tubingspider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) Set AOT Type TA-100, 100-ton, 2-3/8-in (60-mm) tubing elevators. (1) set BJ 100-ton 2-7/8-in, (73-mm) tubing elevators. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0606136. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod gulde. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guibberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assem. w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2010 Shop-built mobile doghouse trailer s/n MWS201002; approximately 9-ft wide x 32-ft long mounted on dual-wheel 10,000-lb tandem axels equipped w/ air-operated brakes & 225/70R22.5 tires w/ approximately 13-mm of tread remaining. Dog house is fitted with; change shack / office, utility & light plant sections c/w folding wing walks, safety railing & access stairwell. Change shack/ doghouse; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light Plant; Isuzu Model EE-4BG1T 4-cylinder diesel unitized with Stamford 30- kW generator c/w day tank, electric start & switchgear s/n M11C110969 Utility room; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet.

(1) USED 2000 Western Star Model 4964SX tandem axel truck s/n 2WKPPDJH4YK962165. Meritor Model FL941 spring-ride front axel rated at 14,600-lbs equipped with polished aluminum wheels mounted on 445/65R22.5 tires w/ air-operated brakes & ABS braking system. Tandem air-ride rear axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 500-hp @ 177 rpm. > Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc.

(1) USED Rig Carrier; 2007 Crane Model DR0106 5-axle self-propelled back-in carrier s/n 1CYEGW6837T047676. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 14-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 18-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2007 Rykar Model 72-140-S; 21.9-m (72-ft) square tubing stiff mast, 120,000-lb (62,000-daN) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly KE-5042. Drawworks; Cooper double-drum drawworks w/ LEBUS grooving. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver s/n 1949. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 425-hp @ 2300 rpm s/n 06R0949883. Transmission; Allison Model HT750- DRDDB torque-tube-drive automatic 5-speed transmission w/ power take-off s/n M5610A. Namco Model right angle drive box. Drill & Sandline; 7/8-inch (25.4-mm) drilline & 1/2-in (12.7-mm) sandline. Hydraulic System; Rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) Pullmaster Model PL5 deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2000 Western Star Model 4986FX tridrive pump truck s/n 2WLPSDCJ3YK962739. Western Model WS16 springride front axel rated at 16,000-lbs equipped with polished aluminum wheels mounted on 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 18,333-lbs/eh equipped w/ air-ride axels rated at 46,000-lbs equipped w/ polished aluminum wheels mounted on 11R22.5 tires w/ approximately 18-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, duel fuel tanks, revolving beacons, chalks etc. Engine; Cat Model 3406E diesel engine rated at 550-hp; 14.6-litre s/n 2WS19060. Transmission; Eaton Model RTLO-20918B, 18 speed manual transmission. Hydraulic system; reservoir tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-l s/n 32700063. > Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 28-m³ (163.5-bbl) mud tank with settling-trough, two



Saskatchewan Personal Property Registry Search Result

General Property

s/n 6TS16393. Transmission; Eaton Model RTLO- 18718B, 18-speed manual transmission. Transport body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP sliding stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc. (1) USED Rig Carrier; 2009 Crane Model DR20106 5-axle self-propelled back-in carrier s/n 1CYEGW6879T049305. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on 445/65-22.5 tires w/ approximately 20-mm of tread remaining & ABS braking system. Meritor 12x6 tri-drive rear axels mounted on polished aluminum wheels equipped w/ 12R22.5 tires w/ approximately 17-mm of tread remaining & ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 2009 Cheyenne Model 104-220, 31.7-m (104-ft) square-tubing telescoping mast, 97,856-daN hook-load capacity w/ 6-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n 09.08.015. Drawworks; Kin Model M3810 double-drum drawworks. Main drum; 254-mm (10-in) x 965-mm (38-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, Kobelt band 40-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown saver. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm. s/n 06R1006764. Transmission; Allison Model HT750 DR torque-tube drive automatic transmission. Namco Model M94-RA45041 right angle drive box s/n N07-16002. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, telescoping cylinder, (2) rear levelling jacks & two mid-ship jacks, power tong, (2) deck winches, etc.

(1) USED 2000 Freightliner s/n 1FUUF7WB1YPG53125 Model T800 truck equipped w/ Rock Well Model 941 springride front axel rated at 16,000-lbs mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 46,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ air-operated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chalks etc. Engine; ISX 530 diesel engine rated at 500- hp @ 2000-rpm s/n 79089324. Transmission; Eaton Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 5-in c/w forged fluid end, quick-change heads, 5- valve manifold pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Travelling & Rig Floor Equipment; McKissick Fig 83AWT-24, 100-ton traveling block assembly w/ (3) 24-in sheaves grooved for 1-in line s/n 875792. (1) Set Gill Type 500 hydraulic power tubing tongs s/n 500-945. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 150T072/71. Canglobal Model Clipper weight indicator, 0- 90,000-daN, calibrated to 62,000-daN s/n 28528. B.O.P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n K08-092. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve s/n 50209-ACD-4. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H1208060. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator; (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve. (1) USED 2009 Southland Model CHT22500-9535-84 mobile doghouse trailer s/n 2S9NL666491022197; approximately 8-ft wide x 36-ft long equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant / accumulator sections. Change shack/ doghouse section; (8) lockers, fridge, desk, stove, electric heater, storage benches w/ filters, coveralls, & globed incandescent interior lighting. Light plant / accumulator section; utility bench, vise, buffer/grinder, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet toilet. Class III accumulator; 3-station electric over hydraulic operation, equipped with approximately 280-litre reservoir w/ pump powered by Weg 15-hp electric motor c/w hydraulically - operated BOP hose reels & carrier-mounted remote. Light Plant; Isuzu Model EE-4BG1T 4- cylinder diesel unitized with Stamford 55- kW generator c/w day tank, electric start & switchgear s/n 49606. Incinolet Model WB electric toilet.

(1) USED 2003 Freightliner Columbia tandem axel truck s/n 1FVPA6AV43PL05431. Rock Well Model 941 spring-ride front axel rated at 14,000-lb mounted on polished aluminum wheels equipped w/ 65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem rear drive axels rated at 56,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels equipped w/ 11R22.5 tires w/ air -operated brakes & ABS braking system. Truck is c/w dual fuel tanks, chains, tire chalks etc. Cat Model C15 turbo-charged diesel engine rated @ 450-hp @ 2100 rpm s/n 6NZ87182. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1978 Cardwell Model B140 s/n 78244, 4- axle self-propelled back-in carrier. Rockwell tandem-steer spring-ride front axels equipped w/ steel wheels mounted on 445/65-22.5 tires w/ ABS braking system. Rockwell tandem-drive rear axels mounted on steel wheels equipped w/ 12R22.5 tires w/ ABS braking system. Single-man insulated cab w/ controls, builtin tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1978 Cardwell Model 72-140, 21.9-m (72-ft)



Saskatchewan Personal Property Registry Search Result

General Property

square-tubing stiff mast, 62,300-daN hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & six sheave crown assembly s/n CE-4544. Drawworks; Cardwell Model K150 doubledrum drawworks. Main drum; 203-mm (8-in) x 914-mm (36-in). Sandline drum; 203-mm (8-in) x 914-mm (36-in), c/w crownsaver, Kobelt band 36-in, Model 122 hydromantic brake clutch, mechanical drum brake & Crown-O-Matic crown. Engine; Detroit Series 60 14.0-L turbocharged diesel drive engine rated @ 665-hp @ 2300 rpm s/n 04RE102775. Transmission; Allison Model CLT750 torque-tube drive automatic transmission s/n 2510014086. > Bevel right angle drive box. Drill & Sandline; 1-inch (25.4-mm) drillline & 1/2-in (12.7-mm) sandline. > Hydraulic System; rig-mounted hydraulic system with approximately 200-gal tank, hydraulic pump, manifold, filters & hoses, System operates one 3-stage mast raising cylinder, (2) rear levelling jacks & two midship jacks, power tong, (2) deck winches, etc. Class II carrier-mounted 22-gal accumulator system.

(1) USED 2006 Western Star Tri Drive s/n 5KJRALCV86PV36016 w/ springride front axel mounted on polished aluminum wheels w/ 425/65R22.5 tires w/ air-operated brakes & ABS braking system. Tridem tri-drive rear axels w/ airride suspension mounted on polished aluminum wheels w/ 11R22.5 tires w/ airoperated brakes & ABS braking system. Truck is equipped with; driver's air-ride seat, tire chains, chocks etc. Engine; Cat Model 3406E diesel engine rated at 475-hp. Transmission; Eaton Model RTLO- 20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, Chelsea power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Gardner Denver triplex mud pump, 300-hp, 35,000-kPa wp, 4-in x 5-in c/w forged fluid end, quick-change heads, 5-valve manifold pulsation dampener, Bowie charge pump, w/ 2-in pressure gauge & Mud Tank; Steel-fabricated 32-m³ 200-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, chiksans & mud hoses. Traveling & Rig Floor Equipment; > McKissick Fig 83AWT-20, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line. (1) Set Gill Type 500 hydraulic power tubing tongs. (1) set x 1-3/4-in x 72-in weld less elevator links, 150-ton capacity. Canglobal Model Clipper weight indicator, 0-90,000-daN, calibrated to 62,000-daN. Cavins depthometer for 14.28-P. Equipment; IEI (Control Tech) Model CS double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim. Spool, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp w/ 51-mm outlet valve. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 73-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set AOT 100-ton 60-mm (2-3/8 in) tubing elevators. (1) set BJ 100-ton 73-mm (2-7/8 in) tubing elevators. (2) Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis. (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000-kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 mobile doghouse trailer s/n 2C9HB46D812044028 ; equipped with spring-ride tandem 10,000-lbs axels mounted on 225/70R22.5 tires. Trailer is c/w change shack & light plant. Light Plant; Isuzu 3-cylinder diesel unitized with Stamford 25-kW generator c/w day tank, electric start & switchgear. Incholet Model WB electric toilet. Transmission; Eaton Model RTLO-16918B, 18-speed manual transmission. Hydraulic system; approximately 40-gal tank, Chelsea power take-off & hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb Junk skid; approximately 8-ft wide x 16-ft long. Body is equipped w/ locking storage compartments, built-in tool boxes, BOP stand, tong rack, lubricator rack, etc. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED Rig Carrier; 1980 Franks Type 300 s/n 196087 free standing 4-axle self-propelled back-in carrier. Tandem-steer front axels equipped w/ polished aluminum wheels mounted on new 445/65-22.5 tires with approximately 15-mm of tread remaining complete with ABS braking system & Reyco suspension. Meritor tandem-drive Rockwell rear axels equipped with polished aluminum wheels mounted on 11R/24.5 tires with approximately 18-mm of tread remaining complete with ABS braking system. Singleman insulated cab w/ air-ride seat, fan, controls & gauges, built-in tool boxes, fuel tanks, wing walk and adjustable working platform. Mast; 1980 Franks Model KR069 1405, 21-m (69-ft) square-tubing free standing stiff mast, 53,400-daN (120,000-lbs) hook-load capacity w/ 4-lines, primary & secondary fall arrest systems, 2-in standpipe & 4 sheave crown assembly w/ (3) 20-in sheaves grooved for 3/4-in line & (1) 16-in sheave grooved for 1/2-in line. Rear stabilization shoe with leveling jacks and swing out stabilization arms s/n J12655. > Drawworks; Frank Model double-drum 42X10 drawworks. Main drum; 254-mm (10-in) x 1,066-mm (42-in). Sandline drum; 38-in dia x 8-in wide, c/w crown-saver, disc brake & crown saver. Engine; Detroit Series 50 8.5-litre turbocharged diesel drive engine rated at 315-hp @ approximately 2,100 rpm s/n 04R0023225. Transmission; Allison Model HT750 torquetube drive automatic transmission.& Chelsea PTO drive. Right angle drive box. Drill & Sandline; 1-inch (25.4-mm) x 3,000-m drillline & 1/2-in (12.7-mm) sandline. Hydraulic System; rig-mounted hydraulic system with approximately 250-gal tank, hydraulic power unit complete with Girdel hydraulic services pump, thermal exchanger, manifold, filters & hoses. System operates one 3-stage mast raising cylinder, power tong, deck winches, etc.

(1) USED2003 Freightliner Model FLD120 truck s/n 1FVPALAV83PL04474 equipped w/ Rock Well spring-ride front axel rated at 14,000-lbs mounted on polished aluminum wheels fitted with 385/65R22.5 tires w/ approximately 12-mm of tread remaining, air-operated brakes & ABS braking system. Tri-drive rear axels rated at 55,000-lbs equipped w/ air-ride suspension mounted on polished aluminum wheels w/ 11R24.5 tires w/ approximately 10-mm of tread remaining, air-operated brakes & ABS braking system. Truck is equipped with; (2) cylinder hydraulic live roll, driver's air-ride seat, tire chains, chocks. Engine; Cat Model C15 diesel engine rated at 450-hp @ approximately 2,100-rpm s/n 6N274661. Transmission; Eaton Fuller Model RTLO-20918B, 18-speed manual transmission. Hydraulic system; approximately 60-gal tank, power take-off & two-stage hydraulic pump. Tulsa Model 30BBX4L2F winch; 30,000-lb. Eweco (Empire) Model E300 triplex mud pump, 330-hp, 35,000-kPa wp, 5-in x 6-in c/w forged fluid end, quick-change heads, 7-valve, 5,000-psi manifold, pulsation dampener, Bowie charge pump w/ 2-in pressure gauge & relief valve. Mud Tank; Steel-fabricated 30-m³ 188-bbl mud tank with settling-trough, two compartments, w/ valves, degasser, c/w flow line, steam coils, fill lines, man lift, external tank gauge, chiksans & mud. Condition Assessment; Mud system and tank is new (not truck). Drop box. Spark arrestors. Stretched frame Traveling & Rig Floor Equipment; McKissick Model Fig. 83A, 75-ton traveling block assembly w/ (3) 20-in sheaves grooved for 1-in line s/n W12163. (1) set Foster Type



Saskatchewan
Personal Property Registry
Search Result

General Property

593-R hydraulic power tubing tongs. (1) set Oil Country 1-3/4-in x 72-in weld less elevator links, 150-ton capacity s/n 38028391-04A/04B. Clipper Model weight indicator, 0-90,000- daN, calibrated to 62,000-dan s/n KCW00205. Cavins depthometer for 14.28-mm.B.O.P. Equipment; IEI (Control Tech) Model DBL double-gate ram preventer, 179-mm (7-1/16 in) x 35,000-kPa (5,000-psi) wp, Nace Trim s/n CT3465. Spool, 179-mm (7-1/16 in) x 21,000-kPa (3,000-psi) wp w/ 51-mm outlet valve s/n API33911. Accumulator; 22-gal class II rig mounted accumulator system. BOP hoses, valves, hoses, studs, nuts, etc. (2) Hi-Kalibre safety valves, 73 & 89-mm. (1) Lot of saver subs, 73 & 89-mm. Tubing & Rod Handling Equipment; (1) Set Cavins 82.5-ton tubing spider w/ 3 1/2-in (89-mm) slip body. (1) Set Mission shallow hand slips w/ 60 to 89-mm dies. (1) set 2 ?-in Type CL Upset 100-ton tubing Elevators s/n 36737080-01. (1) set 2 ?-in Type CL Upset 100-ton tubing elevators s/n 34353023-04. Rod elevators, 5/8-in to 1-in. (4) Rod wrenches, 5/8-in to 1-in. 76-mm rod table w/ brass rod guide. Trico Model 554-578-600, 25-ton rod hook w/ clevis s/n H0611007. > (1) Regan 3-in 76-mm x 21,000-kPa rod BOP. (1) 10-ton BOP elevator w/ pick-up slings. (1) lot of rod chaser, tubing drifts, rod transfers, etc. (1) Lot of Pup joints, 60-mm & 73-mm. Servicing & Swabbing Equipment; Guiberson type HD tandem oil saver w/ high pressure pump & hose. Lubricator, (2) 76-mm x 4.57-m (3-in x 20-ft) w/ Fig 200 unions. 600/900 Series hydraulic tubing pack-off spool. Lift mandrels, rod jars, knuckle joints, rope sockets, sinker bars, tubulars rod jars, centrifuge, etc. Swab tree assembly w/ 76-mm x 21,000- kPa Demco valve, 76-mm FP rod BOP, flow tee & 51-mm ball valve.

(1) USED 2001 International Model 5900i 6X4 Series s/n 1HTXRAET11J086477 tandem-axle tractor powered by Cummins Model N14460E1 turbo charged diesel engine rated at 450-hp @ 2,100 rpm. Engine is unitized with w/ Eaton Fuller 10 speed manual transmission & PTO. Tractor has single steer front axle mounted on 12R/22.5 tires w/ approximately 14-m of tread remaining. Tractor has Tandem rear axles mounted on 11R24.5 tires w/ approximately 18-m of tread remaining. Truck also equipped w/ rear exterior lighting, rear hitch, drivers air ride seat, air ride suspension. Service body; approximately 8-ft wide x 20-ft long. Body is equipped w/ roll-back access tarp, locking storage compartments, built-in tool boxes, BOP stand with slider, tong rack, lubricator rack, etc. Condition Assessment; Truck frame stretched to accommodate deck and slider for BOP stand. Whole unit recently painted.

(1) USED 2012 MWS Model MWS s/n 2M91DV3B7CC185008 mobile doghouse trailer approximately 8-ft wide x 32-ft long. Trailer is equipped with spring-ride tandem 10,000-lbs axels mounted on dual wheels fitted with 225/70R22.5 tires. Change shack/ doghouse section; (8) lockers, knowledge box, fridge, desk, electric heater, storage benches, locking storage cabinets & fluorescent interior lighting. Light plant section; utility bench, vice, locking storage compartments, wrench boards, lubricants, slings, chains, w/ electric heater, grinder, vice, work benches & Incinolet electric toilet. Light Plant; Isuzu Model NEMA powered by Isuzu Model 4BG1T 4-cylinder diesel unitized with Stamford 42-kW generator c/w day tank, electric start & switchgear s/n A05D389308. Rig Support Equipment; (1) Lot of safety equipment including; fire extinguishers, two SCBA 30-minute air packs, safety glasses & shields, basket stretcher, first aid kits, safety signs, safety & climbing belts, eye wash stations, fire blanket, (2) SALA self-retracting lifelines, SALA rig-rider, high-angle rescue kit, etc. (1) Lot of general rig tools including hand wrenches, screwdrivers, hammers, pipe wrenches, jacks, wire brushes, crow bars, cable cutters, drills, file sets, sledge hammers, shovels, tiger torch, bench grinders, etc. (1) Lot spare parts & consumables including mud pump parts, table inserts, valves, hoses, filters, wire rope, slings, unions, fist grips, bull plugs, chains, hose clamps, nipples, etc.

(1) USED 2013 DynaWinch Model CD3-323 s/n 20856 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting s/n 24030. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2- speed hydraulic motor. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & VRoller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2013 International Paystar Model 5918x6 tri drive truck s/n 1HTXVSJT8DJ146041; powered by Cummins Model A 475 diesel engine rated at 475-hp @ 1,700-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 54,000 lbs are equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise.

(1) USED 2005 DynaWinch Model CDC-323 s/n 21270 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 4,800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting. Last inspected April 13, 2010; mast s/n 21270. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by



Saskatchewan
Personal Property Registry
Search Result

General Property

hydraulic motor s/n 054381889. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by hydraulic motor s/n 054081345. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth.

(1) USED 2005 International Paystar Model 5900I 8x6 Tri-axle truck s/n 1HTXTAPT26J225893 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp (15,026-metered hours) unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with approximately 10-mm of tread & polished aluminum wheels with air - operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2007 DynaWinch s/n 21681 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V wiring, interior & exterior lighting, roof-mounted AC/heating unit, bus heater, etc. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 52-ft 6-in overall working height rated for 37,000-lbs w/ ?-in diameter line for swabbing. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) two-stage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility winches & lighting; mast s/n 21681. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E -line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2007 International Model 5618 7X6 Tri-axle truck s/n 1HTXSAPT67J407021; powered by Cummins Model ISX475 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with airride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2012 DynaWinch s/n 33844 recorder body 8-ft 6-in wide x 8-ft 6-in long constructed of 100% aluminum-structure. Recorder body is equipped w/ control console, locking storage cabinets, light table, 12-V & 120-V. CSS DAS 2000 data acquisition system with rack mount chassis and printer 840 DL printer. Service body 8-ft 6-in wide x 18-ft 6-in long with two rear hydraulic stabilizers and locking storage compartments, class 1.1 B and 1.4 S storage magazines, headache rack/crown stand, rear working platform, (1) 10-Kw hydraulic generator with thermal exchanger and switch gear. Mast; Telescoping 62-ft overall working height rated for 33,500-lb safe working load single line w/ guy lines, 67,000-lbs total mast static load. Mast is equipped w/ (1) 16-in sheave grooved for ?-in E-Line (approximately 2800-m line on), (2) TCP sheaves grooved for 3/4-in line (approximately 800-ft line on), (2) 10-in sheaves grooved for ?-in winch line, (2) twostage mast raising cylinders, (2) mast guy lines c/w mounting frame, (2) 9,000-lb utility s/n 23844. Single-drum E-line drawworks; 42-in flange with capacity for 6,000-m of ?-in braided line. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, & IEC slip ring. Drawworks is energized by 2-speed planetary gear box unitized with Sauer hydraulic motor. Single-drum TCP drawworks; 29-in flange with capacity for 250-m of 3/4-in wire rope. Drawworks is equipped with pneumatic brakes, heavy-duty pillow block bearings, control console (located at rear of unit) & weight indicator. Drawworks is energized by 2-speed planetary gear box unitized with Sauer 2-speed hydraulic motor. E-line measuring head assembly; measuring head grooved for ?-in E-line c/w encoders & V-Roller guide assembly (side-to-side movement), load cell & electronic depth counter.

(1) USED 2011 International Model Paystar tandemsteer tri-drive truck s/n 1HTXVAPT2BJ196710 ; powered by Cummins Model ISX600 diesel engine rated at 475-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 23,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels & air - operated brakes. Tridem rear axles rated at 53,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires w/ polished aluminum wheels. Conventional cab equipped with A/C, driver and passenger ride air seats, and Motorola 2 way radio, tire chains, chalks etc. Lot of support equipment including; McKissick 35-ton traveling block, casing swab mandrel, Baker 10 & 20 setting tools, (4) 3 1/2-in dump bailers, 3 1/2-in & 5 1/2-in lubricators, Vanoil 5 1/2-in R45 x 3000-psi flange, 3 1/2-in x 3,000-psi BOP, 5 1/2-in x 5,000-psi BOP w/ Nace trim, Vanoil 4 1/2-in x 5 1/2-in x 3,000-psi flotee, set of CSS bow spring logging centralizers, CSS multiplex bond log tool, gamma tool, sinker bar, collar locators, oil saver w/ pump & rubbers, subs, Type 4 & 6 magazines, (3) 17-in sheave wheels grooved for ?-in line, CCL assembly w/ junk basket & gauge ring noise temp, wire line tools, (1) Laptop, 8-kW hydraulically - powered generator, hand tools etc.

(1) USED 2013 International Paystar Model 5918x6 tridrive truck s/n 1HTNWSMT3DJ603273 ; powered by Cummins Model ISX 450 diesel engine rated at 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 425/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted



Saskatchewan
Personal Property Registry
Search Result

General Property

on11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Jolly Engineering Services Model JES-300 mud pump; 5-in x 6-in x 5,000-psi rated at 160-hp c/w standard heads, pulsation chamber, Otco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 120. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch. Tank is mounted on 8-ft 6-in wide 20-ft long.

(1) USED 1996 Western Star Model tri drive truck s/n 2WLNCCFF0TK941183; powered by a diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Garder Denver Model TEE mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Otco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 precharge pump & control console. Pump is energized by drop box via truck PTO s/n 0010377. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft Kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.



**Saskatchewan
Personal Property Registry
Search Result**

Current - Exact

Registration Type: Personal Property Security Agreement
Registration Date: 03-Jul-2014 10:17:41

Registration #: 301208504
Expiry Date: 02-Jul-2024

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 Canada |

Secured Party

| | |
|--|--|
| Item #: 1 | Address: 600, 444 - 7 Avenue S.W. |
| Party ID: 151816583 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P0X8 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party

| | |
|---|----------------------------------|
| Item #: 1 | Address: 46272 Highway 56 |
| Party ID: 152122503 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: Mustang Well Services Ltd. | Canada |
| *Item #: 2 | Address: 46272 Highway 56 |
| Party ID: 152122504 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V1X4 |
| Name: MRBD Ltd. | Canada |

Serial Property

| | |
|------------------------------------|--|
| Item #: 1 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: International 5600 6.4 tri-drive truck |
| Serial #: 1HTXSAPT35J055979 | Model: |
| Override: No | Color: |
| Item #: 2 | Year: 2005 |
| Serial Type: Motor Vehicle | Make/Desc.: Western Star tri-drive truck |
| Serial #: 5KKPALCK45PU76629 | Model: |
| Override: No | Color: |
| Item #: 3 | Year: 2013 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZT5DJ304393 | Model: |
| Override: No | Color: |
| Item #: 4 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZT1CJ603037 | Model: |
| Override: No | Color: |
| Item #: 5 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZTLCJ603037 | Model: |
| Override: Yes | Color: |
| Item #: 6 | Year: 2012 |
| Serial Type: Motor Vehicle | Make/Desc.: International 7500SBA 6x4 single axel truck |
| Serial #: 1HTWNAZT0CJ660216 | Model: |
| Override: No | Color: |
| Item #: 7 | Year: 2012 |



**Saskatchewan
Personal Property Registry
Search Result**

Serial Property

Serial Type: Motor Vehicle
Serial #: 1HTWNAZT9CJ078969
Override: No

Make/Desc.: International 7500SBA 6x4 single axel truck
Model:
Color:

Item #: 8
Serial Type: Motor Vehicle
Serial #: 1HTMKAAR87H407626
Override: No

Year: 2006
Make/Desc.: Western Star Tri Drive truck
Model:
Color:

General Property

(1) USED 2005 International Model 5600 6X4 tri-drive truck s/n 1HTXSAPT35J055979 ; powered by Cummins diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tridem rear axles rated at 52,000 lbs equipped with airride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO. s/n 1201. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150 psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

(1) USED 2005 Western Star tri-drive truck s/n 5KKPALCK45PU76629; powered by Detroit Series 60 diesel engine rated at approximately 450-hp unitized with Eaton Model RTLO16918B 18-speed manual transmission. Truck is equipped with; dual power steering boxes unitized to 20,000-lb spring-ride front axles mounted on 445/65R22.5 tires with polished aluminum wheels and air-operated brakes. Tri-drive rear axles rated at 52,000 lbs equipped with air-ride suspension mounted on 11R24.5 tires, polished aluminum wheels and air - operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Truck is equipped with steel-constructed wood plank decked; 8-ft 6-in wide x 20-ft long c/w live roll & Tulsa Model 08C6 winch, 20,000-lb pull rating & junk basket with elbows, chick sans etc. Empire Model E-300 mud pump; 4-in x 5-in c/w standard heads, pulsation chamber, Oteco pressure valve, 2-in relief valve, 5-valve 2-in x 3000 psi manifold, Bowie Model 33 pre-charge pump & control console. Pump is energized by drop box via truck PTO s/n 1201. (1) 28-m³ 2 section tank with; degasser, (2) guns, (2) gate valves, telescopic lighting, (20) 2-in joints line pipe x 3000-psi, 30-ft 4-in x 150-psi suction hose, (1) 30-ft and (1) 40-ft kelly hose x 3625-psi. Tank c/w tripod man lift with manual winch.

(1) USED 2013 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT5DJ304393; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc s/n 24058. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls s/n 1201. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools including; rod hook, elevators, wrenches, etc.

(1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT1CJ603037; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.

(1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZTLCJ603037; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chalks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guibberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (2?-in ~ 2?-in inserts), Web Wilson 2-in dia x 53-tons bails, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.

(1) USED 2012 International Model 7500SBA6X4 single axle truck s/n 1HTWNAZT0CJ660216; powered by Maxxforce Model GDT 350 diesel engine rated at 350-hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with air-ride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-



**Saskatchewan
Personal Property Registry
Search Result**

General Property

operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc s/n 23797. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guiberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (27-in ~ 27-in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.


(1) USED 2012 International Model 7500SBA6X4 single-axle truck s/n 1HTWNAZT9CJ078969; powered by Maxxforce Model GDT 350 diesel engine rated at 350- hp @ 2,000-rpm unitized with Allison Model 3000RDS automatic 6-speed transmission. Truck is equipped with; 16,000-lb front axle mounted on 315/80R22.5 tires with painted steel wheels and air-operated brakes. Rear axle rated at 20,000 lbs equipped with airride suspension mounted on 11R22.5 tires w/ painted steel wheels and air-operated brakes. Conventional cab equipped with A/C, driver air ride seat, and Motorola 2 way radio, tire chains, chocks etc. Dynawinch BOP support deck; approximately 8½-ft wide x 22-ft long w/ BOP stump c/w Warn positioning winch, tubular wall racks, chic-san hangers, caged junk baskets, custom locking cabinetry, head ache rack, aluminum stairwell, lighting etc. Electric over hydraulic 3,000-psi Class II accumulator system equipped w/ 45-gal reservoir, nitrogen back-up, hose reels, direct & remote (rig-mounted) controls. Lot of support equipment including; Guiberson Type 1 air slips, Mission Low-Lie slips, tubing elevators (27-in ~ 27-in inserts), Web Wilson 2-in dia x 53-tons balls, TEDA (Chinese) Model XYQ6B power tongs c/w 2-in ~ 3½-in dies, lot of rod tools.

(1) USED 2006 Western Star Tri Drive truck s/n 1HTMKAAR87H407626. Spring-ride front axel mounted on steel wheels equipped w/ air-operated brakes. Air-ride rear axels mounted on steel wheels. Steel-constructed carrier deck. Engine; Cat Model 3406E diesel engine rated at 475-hp.

Proceeds: goods, chattel paper, investment properties, documents of title, instruments, money and intangibles.

End of Search Result

This is **Exhibit "S"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

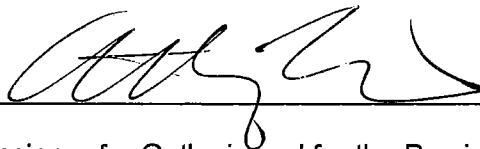A handwritten signature in black ink, appearing to read 'Anthony Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

Search ID#: Z10255377

Transmitting Party

Gowling WLG (Canada) LLP

1600, 421 - 7 AVENUE S.W.
CALGARY, AB T2P 4K9

Party Code: 50016237
Phone #: 403 298 1004
Reference #: A155881/TSC

Search ID #: Z10255377

Date of Search: 2018-May-09

Time of Search: 13:09:05

Business Debtor Search For:

REACTION OILFIELD SUPPLY (2012) LTD.

Both Exact and Inexact Result(s) Found

NOTE:

A complete Search may result in a Report of Exact and Inexact Matches.

Be sure to read the reports carefully.



Search ID#: Z10255377

Business Debtor Search For:

REACTION OILFIELD SUPPLY (2012) LTD.

Search ID #: Z10255377

Date of Search: 2018-May-09

Time of Search: 13:09:05

Registration Number: 15042912807

Registration Type: SECURITY AGREEMENT

Registration Date: 2015-Apr-29

Registration Status: Current

Expiry Date: 2020-Apr-29 23:59:59

Exact Match on: Debtor

No: 1

Debtor(s)

Block

Status

| | | |
|---|--|---------|
| 1 | REACTION OILFIELD SUPPLY (2012) LTD. PO BOX 1467 CAMROSE, AB T4V 1X4 | Current |
|---|--|---------|

Secured Party / Parties

Block

Status

| | | |
|---|--|---------|
| 1 | ALBERTA TREASURY BRANCHES #700, 7300 - 48TH AVENUE CAMROSE, AB T4V 4W2 | Current |
|---|--|---------|

Collateral: General

Block

Description

Status

| | | |
|---|--|---------|
| 1 | ALL PRESENT AND AFTER-ACQUIRED PERSONAL PROPERTY OF THE DEBTOR. | Current |
| 2 | ALL ACCOUNTS, INSTRUMENTS, DEBTS AND CHATTEL PAPER WHICH ARE NOW DUE, OWING, OR ACCRUING DUE, OR WHICH MAY HEREAFTER BECOME DUE, OWING OR ACCRUING DUE, TO THE DEBTOR, TOGETHER WITH ALL RECORDS (WHETHER IN WRITING OR NOT) AND OTHER DOCUMENTS OF ANY KIND WHICH IN ANY WAY EVIDENCE OR RELATE TO ANY OR ALL OF THE ACCOUNTS, INSTRUMENTS, DEBTS OR CHATTEL PAPER. | Current |
| 3 | ALL PRESENT AND AFTER-ACQUIRED INVENTORY OF THE DEBTOR, WHEREVER LOCATED. | Current |

Search ID#: Z10255377

Business Debtor Search For:

REACTION OILFIELD SUPPLY (2012) LTD.

Search ID #: Z10255377

Date of Search: 2018-May-09

Time of Search: 13:09:05

Registration Number: 16051029378

Registration Type: SECURITY AGREEMENT

Registration Date: 2016-May-10

Registration Status: Current

Expiry Date: 2022-May-10 23:59:59

Exact Match on: Debtor

No: 1

Debtor(s)

Block

Status

| | | |
|---|--|---------|
| 1 | REACTION OILFIELD SUPPLY (2012) LTD. 46358 SEC. HWY. 834 CAMROSE, AB T4V 1X4 | Current |
|---|--|---------|

Secured Party / Parties

Block

Status

| | | |
|---|---|---------|
| 1 | BDC CAPITAL INC. BARCLAY CENTRE, 110, 444 - 7TH AVENUE SW CALGARY, AB T2P 0X8 | Current |
|---|---|---------|

Collateral: Serial Number Goods

| <u>Block</u> | <u>Serial Number</u> | <u>Year</u> | <u>Make and Model</u> | <u>Category</u> | <u>Status</u> |
|---------------------|-----------------------------|--------------------|------------------------------|------------------------|----------------------|
| 1 | 3GTP2UEA9BG212329 | 2011 | GMC Sierra 1500 4WD | MV - Motor Vehicle | Current |
| 2 | 3GTP2VE7XCG230334 | 2012 | GMC Sierra 1500 4WD | MV - Motor Vehicle | Current |

Collateral: General

Block

Description

Status

| | | |
|---|--|---------|
| 1 | All present and after-acquired personal property and proceeds. | Current |
|---|--|---------|

Search ID#: Z10255377

Note:

The following is a list of matches closely approximating your Search Criteria,
which is included for your convenience and protection.

Debtor Name / Address

REACTION OILFIELD SUPPLY LTD.
12-3610 47TH AVE
CAMROSE, AB T4V1X4

Reg. #

12112717521

SECURITY AGREEMENT

Debtor Name / Address

REACTION OILFIELD SUPPLY LTD.
P.O. BOX 1467
CAMROSE, AB T4V1X4

Reg. #

12112810470

SECURITY AGREEMENT

Debtor Name / Address

REACTION OILFIELD SUPPLY LTD.
PO BOX 6071, STN MAIN
LEDUC, AB T9E2A2

Reg. #

12121917210

SECURITY AGREEMENT

Debtor Name / Address

REACTION OILFIELD SUPPLY LTD.
PO BOX 1467, GD,
CAMROSE, AB T4V1X1


Reg. #

15121622493

SECURITY AGREEMENT

Result Complete

This is **Exhibit "T"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'Anthony Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

This is **Exhibit "U"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018



A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor



Saskatchewan Personal Property Registry Search Result

Searching Party: Gowling Lafleur Henderson LLP
Search Date: 10-May-2018 13:25:44
Search Type: Standard

Search #: 202745199
Client Reference: A155881/TSC
Control #:

Search Criteria

Search By: Business Debtor Name

Business Name
Reaction Oilfield Supply (2012) Ltd.

The following list displays all matches & indicates the ones that were selected.

2 Registration(s) Found: Exacts (0) - Similar (2)

| Selected | Match | Registration # | Registration Type | Debtor Name | City | Enforcement Instruction | Enforcement Instruction Registration # |
|----------|---------|----------------|--------------------------------------|-------------------------------------|---------|-------------------------|--|
| Yes | Similar | 301333399 | Personal Property Security Agreement | Reaction Oilfield Supply (2012) Ltd | Nisku | No | N/A |
| No | Similar | 300959842 | Personal Property Security Agreement | REACTION OILFIELD SUPPLY LTD. | CAMROSE | No | N/A |



**Saskatchewan
Personal Property Registry
Search Result**

Current - Similar

Registration Type: Personal Property Security Agreement
Registration Date: 05-May-2015 08:57:18

Registration #: 301333399
Expiry Date: 05-May-2020

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|---|---|
| Party ID: 151055605 - 1 | Address: Unit 100, 10072 Jasper Avenue |
| Entity Type: Business | Edmonton, Alberta |
| Name: Alberta Service Bureau Inc | T5J1V8 |
| | Canada |

Secured Party

| | |
|--|---------------------------------|
| Item #: 1 | Address: 700-7300 48 Ave |
| Party ID: 152320934 - 1 | Camrose, Alberta |
| Entity Type: Business | T4V4W2 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party


| | |
|--|-----------------------------------|
| *Item #: 1 | Address: Bay #14-1202 8 St |
| Party ID: 152320935 - 1 | Nisku, Alberta |
| Entity Type: Business | T9E7M1 |
| Name: Reaction Oilfield Supply (2012) Ltd | Canada |

General Property

All present and after acquired personal property of the Debtor

End of Search Result

This is **Exhibit "V"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'A. Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

Search ID#: Z10255358

Transmitting Party

Gowling WLG (Canada) LLP

1600, 421 - 7 AVENUE S.W.
CALGARY, AB T2P 4K9

Party Code: 50016237
Phone #: 403 298 1004
Reference #: A155881/TSC

Search ID #: Z10255358

Date of Search: 2018-May-09

Time of Search: 13:07:33

Business Debtor Search For:

KKSR ENTERPRISES LTD.

Both Exact and Inexact Result(s) Found

NOTE:

A complete Search may result in a Report of Exact and Inexact Matches.

Be sure to read the reports carefully.



Search ID#: Z10255358

Business Debtor Search For:

KKSR ENTERPRISES LTD.

Search ID #: Z10255358

Date of Search: 2018-May-09

Time of Search: 13:07:33

Registration Number: 09101419772

Registration Type: SECURITY AGREEMENT

Registration Date: 2009-Oct-14

Registration Status: Current

Expiry Date: 2019-Oct-14 23:59:59

Exact Match on: Debtor

No: 1

Debtor(s)

Block

Status

| | | |
|---|---|---------|
| 1 | KKSR ENTERPRISES LTD. 300 840 - 6 AVENUE SW CALGARY, AB T2P 3E5 | Current |
|---|---|---------|

Secured Party / Parties

Block

Status

| | | |
|---|--|---------|
| 1 | ALBERTA TREASURY BRANCHES - 07669 700,7300 48 AVENUE CAMROSE, AB T4V 4W2 Phone #: 780 672 3331 Fax #: 780 672 5444 | Current |
|---|--|---------|

Collateral: General

Block

Description

Status

| | | |
|---|--|---------|
| 1 | ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY | Current |
| 2 | PROCEEDS: ALL PRESENT AND AFTER ACQUIRED PERSONAL PROPERTY DERIVED DIRECTLY OR INDIRECTLY FROM ANY DEALINGS WITH THE ORIGINAL COLLATERAL OR PROCEEDS THEREOF | Current |

Search ID#: Z10255358

Business Debtor Search For:

KKSR ENTERPRISES LTD.

Search ID #: Z10255358

Date of Search: 2018-May-09

Time of Search: 13:07:33

Registration Number: 13102530645

Registration Type: LAND CHARGE

Registration Date: 2013-Oct-25

Registration Status: Current

Registration Term: Infinity

Exact Match on: Debtor

No: 1

Debtor(s)

Block

Status

1 KKSR ENTERPRISES LTD.
P.O. BOX 1467
CAMROSE, AB T4V 1X4

Current

Secured Party / Parties

Block

Status

1 ALBERTA TREASURY BRANCHES
#700, 7033 - 48 AVENUE
CAMROSE, AB T4V 4W2

Current

Particulars

Block **Additional Information**

Status

1 Mortgage registered as instrument no. 132 341 378 against Plan 1323928, Block 1, Lot 9
and Plan 9922651, Lot 3

Current

Search ID#: Z10255358

Business Debtor Search For:

KKSR ENTERPRISES LTD.

Search ID #: Z10255358

Date of Search: 2018-May-09

Time of Search: 13:07:33

Registration Number: 16051031018

Registration Type: SECURITY AGREEMENT

Registration Date: 2016-May-10

Registration Status: Current

Expiry Date: 2022-May-10 23:59:59

Exact Match on: Debtor

No: 1

Debtor(s)

Block

Status

1 KCSR ENTERPRISES LTD.
 46272 HWY 56
 CAMROSE, AB T4V 1X4

Current

Secured Party / Parties

Block

Status

1 BDC CAPITAL INC.
 BARCLAY CENTRE, 110, 444 - 7TH AVENUE SW
 CALGARY, AB T2P 0X8

Current

Collateral: General

Block **Description**

Status

1 All present and after-acquired personal property and proceeds.

Current

Search ID#: Z10255358

Note:

The following is a list of matches closely approximating your Search Criteria,
which is included for your convenience and protection.

Debtor Name / Address

C & C ENTERPRISES INC
67 RIVER ROCKMR SE
CALGARY, AB T2C4J2

Reg. #

14112712479

SECURITY AGREEMENT

Debtor Name / Address

C & C HOLDINGS INC.
5410 - 64 STREET
TABER, AB T1G 1X6

Reg. #

12112206642

SECURITY AGREEMENT

Debtor Name / Address

C & C SYSTEMS LIMITED
260235 WOODLAND ROAD
CALGARY, AB T3R 1G7

Reg. #

15021122957

SECURITY AGREEMENT

Debtor Name / Address

C & K BROTHERS INC.
3307 26 STREET
EDMONTON, AB T6T 1Z3

Reg. #

15061024631

SECURITY AGREEMENT

Debtor Name / Address

C & K BROTHERS INC.
3307 26 STREET
EDMONTON, AB T6T 1Z3

Reg. #

15061024631

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

15101607134

Search ID#: Z10255358

C & K BROTHERS INC.
3307 26 STREET
EDMONTON, AB T6T 1Z3

SECURITY AGREEMENT

Debtor Name / Address

C & K BROTHERS INC.
3307 26 ST NW
EDMONTON, AB T6T 1Z3

Reg. #

17072702544

SECURITY AGREEMENT

Debtor Name / Address

C & K BROTHERS INC.
3307 26 ST NW
EDMONTON, AB T6T 1Z3

Reg. #

17072702544

SECURITY AGREEMENT

Debtor Name / Address

C&C ENTERPRISES
AS ABOVE
, AB

Reg. #

06031528109

WORKERS' COMPENSATION BOARD CHARGE

Debtor Name / Address

C-CONSULTING & SERVICES
14 BROADVIEW CRES
ST ALBERT, AB T8N 0B2

Reg. #

08072542833

SECURITY AGREEMENT

Debtor Name / Address

C.C.S.R.
1640 16 AVENUE NW, SUITE 303
CALGARY, AB T2M 0L6

Reg. #

16010418076

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

C.K. ENTERPRISES
BOX 1160
PICTURE BUTTE, AB T0K 1V0

05081515651

SECURITY AGREEMENT

Debtor Name / Address

CC & C SERVICES
11036 - 89 AVENUE
GRANDE PRAIRIE, AB T8V 4W4

Reg. #

17112733604

GARAGE KEEPERS' LIEN

Debtor Name / Address

CC & SONS LTD.
1116 65 STREET
EDMONTON, AB T6L4A2

Reg. #

15071534154

SECURITY AGREEMENT

Debtor Name / Address

CC & SONS LTD.
1116-65 STREET NW
EDMONTON, AB T6L 4A2

Reg. #

16101816220

WRIT OF ENFORCEMENT

Debtor Name / Address

CC CORPORATION
212 10A ST NW
CALGARY, BC T2N 1V5

Reg. #

15092904598

SECURITY AGREEMENT

Debtor Name / Address

CC&C SERVICES
11036-89 AVE
GRANDE PRAIRIE, AB T8V 4W4

Reg. #

17122825041

GARAGE KEEPERS' LIEN

Debtor Name / Address

Reg. #

Search ID#: Z10255358

CC&C SERVICES
11036-89 AVE
GRANDE PRAIRIE, AB T8V 4W4

18040214384

GARAGE KEEPERS' LIEN

Debtor Name / Address

Reg. #

CC&C SERVICES
11036 - 89 AVENUE
GRANDE PRAIRIE, AB T8V4W4

18041910489

GARAGE KEEPERS' LIEN

Debtor Name / Address

Reg. #

CCC INCORPORATED
7-213 TIMBERLINE DRIVE
FORT MCMURRAY, AB T9K1S1

15050410519

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CCC INCORPORATED
7-213 TIMBERLINE DRIVE
FORT MCMURRAY, AB T9K1S1

15050410519

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CCK CONSULTING LTD.
6500 - 71 STREET
RED DEER, AB T4P3V7

07113011436

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CCK CONSULTING LTD.
6500 - 71 STREET
RED DEER, AB T4P 3V7

13102515656

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

CCK CONSULTING LTD.
6500 - 71ST STREET
RED DEER, AB T4P 3Y7

17091236808

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CK CONSULTING INC.
133 HARVEST CREEK CLOSE NE
CALGARY, AB T3K 4P9

10121517604

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CKC ENTERPRISES LTD
4911 50TH AVENUE
VERMILION, AB T9X 1A6

08102831322

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CKC ENTERPRISES LTD.
4401 50
VERMILION, AB T9X 1P7

14071009307

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CS ENGINEERING INC.
BOX 71
ARMENA, AB T0B 0G0

09081031553

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CS HOLDINGS
7103 - 42 STREET
EDMONTON, AB T6B 2T1

15042024296

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

CS HOLDINGS
7103-42 STREET
EDMONTON, AB T6B 2T1

16050310607

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CSS
12759 149 ST NW
EDMONTON, AB T5L4M9

16080313458

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CSS
12759 149 ST NW
EDMONTON, AB T5L 4M9

17053006923

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CSS
12759 149 ST NW
EDMONTON, AB T5L 4M9

17053006923

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

CZS HOLDINGS LTD.
2700, 10155 - 102 STREET
EDMONTON, AB T5J 3G8

01071718629

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & C ENTERPRISES INC
BOX 95
THREE HILLS, AB T0M 2A0

10092806067

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

K & C ENTERPRISES INC.
BOX 95
THREE HILLS, AB T0M 2A0

14091036917

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & C ENTERPRISES INC.
PO BOX 95
THREE HILLS, AB T0M 2A0

14091212644

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & C ENTERPRISES INC.
PO BOX 95
THREE HILLS, AB T0M 2A0

14091212894

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & C ENTERPRISES INC.
PO BOX 95
THREE HILLS, AB T0M 2A0

14120109871

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & C ENTERPRISES INC.
PO BOX 95
THREE HILLS, AB T0M 2A0

15092826416

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & C ENTERPRISES INC.
SE 16 31 23 W4 BOX 95
THREE HILLS, AB T0M 2A0

17121222121

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

K & K ENTERPRISES (1998) LTD.
6 ABERDEEN BAY NW
LETHBRIDGE, AB T1J4Z2

13031917314

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & K ENTERPRISES (1998) LTD.
6 ABERDEEN BAY NW
LETHBRIDGE, AB T1J 4Z2

18031221768

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K & K ENTERPRISES INC.
P.O. BOX 263
RED DEER, AB T4N5E8

93100811319

LAND CHARGE

Debtor Name / Address

Reg. #

K C ENTERPRISES
13039 LAKE TWINTREE RD SE
CALGARY, AB T2J 2X2

99031809918

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K S CONSULTING INC.
BOX 267 BOX 267
ALDER FLATS, AB T0C0A0

14071609996

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K SYSTEMS LTD
9412 ALLISON DR SE
CALGARY, AB T2J 1B5

00103110953

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

K. S. ENTERPRISES LTD.
7 - 3219 1 AVENUE
LETHBRIDGE, AB T1J4H1

16102638052

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K.S. ENTERPRISES LTD.
3205 6 AVENUE NORTH UNIT 7
LETHBRIDGE, AB T1H 5C1

09021130598

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K.S. ENTERPRISES LTD.
#7, 3205-6TH AVENUE NORTH
LETHBRIDGE, AB T1H 5C1

12070409267

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K.S. ENTERPRISES LTD.
3219 1ST AVENUE SOUTH
LETHBRIDGE, AB T1J 4H1

14111737063

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K.S. ENTERPRISES LTD.
3219 1 AVENUE
LETHBRIDGE, AB T1J 4H1

16063022204

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

K.S. ENTERPRISES LTD.
3219 1 AVE SOUTH
LETHBRIDGE, AB T1J4H1

17040435557

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

K.S. ENTERPRISES LTD.
3219 1 AVENUE SOUTH
LETHBRIDGE, AB T1J 4H1

17110631333

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KC & CO
5015 - 50 STREET
HOLDEN, AB T0B 2C0

13100738824

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KC & CO
5015 - 50 STREET
HOLDEN, AB T0B 2C0

13100738824

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KCC HOLDINGS LTD.
#5, 1245 - 2 AVE S
LETHBRIDGE, AB T1J 0E5

16030227180

LAND CHARGE

Debtor Name / Address

Reg. #

KCC HOLDINGS LTD.
#5, 1245- 2 AVE S
LETHBRIDGE, AB T1J 0E5

16030227599

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KCC HOLDINGS LTD.
#5, 1245-2 AVE S
LETHBRIDGE, AB T1J 0E5

16031626580

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

KK HOLDINGS LTD.
555 MCDONALD STREET
REGINA, SK S4N 4X1

09012721674

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KK PRODUCTION SERVICES LTD.
16006-48 STREET
EDMONTON, AB T5Y 0C3

17121229073

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KK PRODUCTION SERVICES LTD.
16006-48 STREET
EDMONTON, AB T5Y 0C3

17121324399

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KKK ENTERPRISES INC.
PO BOX 92089 MEADOW BROOK RPO
EDMONTON, AB T6T1N1

03080821212

WORKERS' COMPENSATION BOARD CHARGE

Debtor Name / Address

Reg. #

KS CONSULTING INC.
PO BOX 267
ALDER FLATS, AB T0C0A0

11031604247

WORKERS' COMPENSATION BOARD CHARGE

Debtor Name / Address

Reg. #

KS ENTERPRISES LTD
BAY 7 3205 - 6 AVE N
LETHBRIDGE, AB T1H5C1

16052013570

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

Search ID#: Z10255358

KS ENTERPRISES LTD
3219 1 AVENUE SOUTH
LETHBRIDGE, AB T1J 4H1

17110631333

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KZ INC.
6518 4 ST NE,
CALGARY, AB T2K 6H2

14052623565

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KZ INC.
6518 4 ST NE
CALGARY, AB T2K 6H2

14052627974

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KZ INC.
6518 4 ST NE
CALGARY, AB T2K 6H2

14052627974

SECURITY AGREEMENT

Debtor Name / Address

Reg. #

KZ INC.
6518 4 ST NE
CALGARY, AB T2K 6H2

14052627991

SECURITY AGREEMENT

Debtor Name / Address

Reg. #


KZ INC.
6518 4 ST NE
CALGARY, AB T2K 6H2

14052627991

SECURITY AGREEMENT

Result Complete


This is **Exhibit "W"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

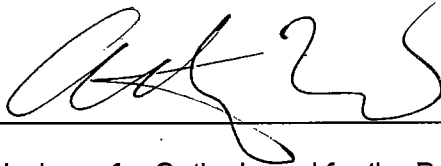A handwritten signature in black ink, appearing to read 'A. Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

This is **Exhibit "X"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'Anthony Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor



Saskatchewan Personal Property Registry Search Result

Searching Party: Gowling Lafleur Henderson LLP
Search Date: 10-May-2018 13:25:05
Search Type: Standard

Search #: 202745196
Client Reference: A155881/TSC
Control #:

Search Criteria

Search By: Business Debtor Name
Business Name
KKSR Enterprises Ltd.

The following list displays all matches & indicates the ones that were selected.

1 Registration(s) Found: Exacts (1) - Similar (0)

| Selected | Match | Registration # | Registration Type | Debtor Name | City | Enforcement Instruction | Enforcement Instruction Registration # |
|----------|-------|----------------|--------------------------------------|-----------------------|---------|-------------------------|--|
| Yes | Exact | 301595947 | Personal Property Security Agreement | KKSR Enterprises Ltd. | Calgary | No | N/A |



**Saskatchewan
Personal Property Registry
Search Result**

Current - Exact

Registration Type: Personal Property Security Agreement
Registration Date: 08-Mar-2017 16:06:13

Registration #: 301595947
Expiry Date: 08-Mar-2022

Event Type: Setup
Transaction Reason: Regular

Notations

Trust Indenture: No

Registrant

| | |
|-----------------------------------|---|
| Party ID: 150242056 - 1 | Address: 1400-2500 VICTORIA AVENUE |
| Entity Type: Business | REGINA, Saskatchewan |
| Name: KANUKA THURINGER LLP | S4P3X2 Canada |

Secured Party

| | |
|--|-------------------------------------|
| Item #: 1 | Address: 600, 585 8th AVE SW |
| Party ID: 152733342 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P1G1 |
| Name: Alberta Treasury Branches | Canada |

Debtor Party


| | |
|------------------------------------|----------------------------------|
| *Item #: 1 | Address: 300 840-6 AVE SW |
| Party ID: 152733394 - 1 | Calgary, Alberta |
| Entity Type: Business | T2P3E5 |
| Name: KKSR Enterprises Ltd. | Canada |

General Property

All of the Debtor's present and after-acquired personal property.

End of Search Result

This is **Exhibit "Y"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

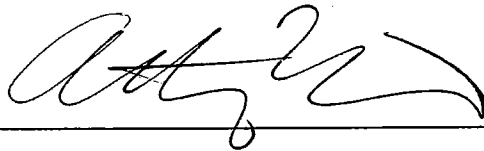A handwritten signature in black ink, appearing to read 'Anthony Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor



LAND TITLE CERTIFICATE

S
LINC SHORT LEGAL TITLE NUMBER
0035 811 918 1323928;1;9 132 341 377

LEGAL DESCRIPTION
PLAN 1323928
BLOCK 1
LOT 9
EXCEPTING THEREOUT ALL MINES AND MINERALS
AREA: 2.44 HECTARES (6.03 ACRES) MORE OR LESS

ESTATE: FEE SIMPLE
ATS REFERENCE: 4;19;46;17;NE

MUNICIPALITY: CAMROSE COUNTY

REFERENCE NUMBER: 132 294 083 +8

| REGISTRATION | DATE (DMY) | REGISTERED OWNER(S) DOCUMENT TYPE | VALUE | CONSIDERATION |
|--------------|------------|--------------------------------------|-----------|---------------|
| 132 341 377 | 22/10/2013 | TRANSFER OF LAND | \$180,000 | \$180,000 |

OWNERS

KKSR ENTERPRISES LTD.
OF BOX 1467
CAMROSE
ALBERTA T0B 4J0

ENCUMBRANCES, LIENS & INTERESTS

| REGISTRATION NUMBER | DATE (D/M/Y) | PARTICULARS |
|------------------------|--------------|---|
| 5578UT | 09/09/1974 | UTILITY RIGHT OF WAY GRANTEE - ANKERTON GAS CO-OP LTD. |
| 052 245 832 | 21/06/2005 | UTILITY RIGHT OF WAY GRANTEE - BATTLE RIVER RURAL ELECTRIFICATION ASSOCIATION LIMITED. BOX 1420 CAMROSE |

(CONTINUED)

ENCUMBRANCES, LIENS & INTERESTS

PAGE 2
132 341 377

REGISTRATION
NUMBER DATE (D/M/Y) PARTICULARS

ALBERTA T4V1X3

122 226 817 18/07/2012 CAVEAT
RE : UTILITY RIGHT OF WAY
CAVEATOR - FORTISALBERTA INC.
700, 801 - 7 AVE SW
CALGARY
ALBERTA T2P3P7
AGENT - JOSH DEAN

132 294 084 17/09/2013 CAVEAT
RE : DEVELOPMENT AGREEMENT PURSUANT TO MUNICIPAL
GOVERNMENT ACT
CAVEATOR - CAMROSE COUNTY.
3755-43 AVENUE
CAMROSE
ALBERTA T4V3S8
AGENT - A HOWARD

132 294 085 17/09/2013 UTILITY RIGHT OF WAY
GRANTEE - CAMROSE COUNTY.

132 294 086 17/09/2013 CAVEAT
RE : DEVELOPMENT AGREEMENT PURSUANT TO MUNICIPAL
GOVERNMENT ACT
CAVEATOR - CAMROSE COUNTY.
3755-43 AVENUE
CAMROSE
ALBERTA T4V3S8
AGENT - A HOWARD

132 341 378 22/10/2013 MORTGAGE
MORTGAGEE - ALBERTA TREASURY BRANCHES.
700 7300 48 AVE
CAMROSE
ALBERTA T4V4W2
ORIGINAL PRINCIPAL AMOUNT: \$2,800,000

132 341 379 22/10/2013 CAVEAT
RE : ASSIGNMENT OF RENTS AND LEASES
CAVEATOR - ALBERTA TREASURY BRANCHES.
700 7300 48 AVE
CAMROSE
ALBERTA T4V4W2
AGENT - WAYNE THRONDSO

142 049 655 14/02/2014 CAVEAT
RE : LEASE INTEREST
CAVEATOR - MUSTANG WELL SERVICES LTD.
3200 MANULIFE PLACE, 10180 101 ST

(CONTINUED)

ENCUMBRANCES, LIENS & INTERESTS

PAGE 3
132 341 377

REGISTRATION
NUMBER DATE (D/M/Y) PARTICULARS

EDMONTON
ALBERTA T5J3W8
AGENT - WESLEY M PEDRUSKI

182 089 420 20/04/2018 TAX NOTIFICATION
BY - CAMROSE COUNTY.
3755-43 AVENUE
CAMROSE, ALBERTA
T4V3S8

TOTAL INSTRUMENTS: 010

THE REGISTRAR OF TITLES CERTIFIES THIS TO BE AN
ACCURATE REPRODUCTION OF THE CERTIFICATE OF
TITLE REPRESENTED HEREIN THIS 10 DAY OF MAY,
2018 AT 01:36 P.M.

ORDER NUMBER: 35078718

CUSTOMER FILE NUMBER: A155881



END OF CERTIFICATE

THIS ELECTRONICALLY TRANSMITTED LAND TITLES PRODUCT IS INTENDED
FOR THE SOLE USE OF THE ORIGINAL PURCHASER, AND NONE OTHER,
SUBJECT TO WHAT IS SET OUT IN THE PARAGRAPH BELOW.

THE ABOVE PROVISIONS DO NOT PROHIBIT THE ORIGINAL PURCHASER FROM
INCLUDING THIS UNMODIFIED PRODUCT IN ANY REPORT, OPINION,
APPRAISAL OR OTHER ADVICE PREPARED BY THE ORIGINAL PURCHASER AS
PART OF THE ORIGINAL PURCHASER APPLYING PROFESSIONAL, CONSULTING
OR TECHNICAL EXPERTISE FOR THE BENEFIT OF CLIENT(S).

ENCUMBRANCES, LIENS & INTERESTS

PAGE 2
082 114 241

REGISTRATION
NUMBER DATE (D/M/Y) PARTICULARS

AGENT - WESLEY M PEDRUSKI

122 118 209 20/04/2012 CAVEAT
RE : AGREEMENT CHARGING LAND
CAVEATOR - FORTISALBERTA INC.
320-17 AVE SW
CALGARY
ALBERTA T2S2V1
AGENT - GARRY SIMPSON

132 341 378 22/10/2013 MORTGAGE
MORTGAGEE - ALBERTA TREASURY BRANCHES.
700 7300 48 AVE
CAMROSE
ALBERTA T4V4W2
ORIGINAL PRINCIPAL AMOUNT: \$2,800,000

132 341 379 22/10/2013 CAVEAT
RE : ASSIGNMENT OF RENTS AND LEASES
CAVEATOR - ALBERTA TREASURY BRANCHES.
700 7300 48 AVE
CAMROSE
ALBERTA T4V4W2
AGENT - WAYNE THRONDSO

182 089 420 20/04/2018 TAX NOTIFICATION
BY - CAMROSE COUNTY.
3755-43 AVENUE
CAMROSE, ALBERTA
T4V3S8

TOTAL INSTRUMENTS: 006

THE REGISTRAR OF TITLES CERTIFIES THIS TO BE AN
ACCURATE REPRODUCTION OF THE CERTIFICATE OF
TITLE REPRESENTED HEREIN THIS 10 DAY OF MAY,
2018 AT 01:36 P.M.

ORDER NUMBER: 35078718

CUSTOMER FILE NUMBER: A155881




END OF CERTIFICATE

(CONTINUED)

THIS ELECTRONICALLY TRANSMITTED LAND TITLES PRODUCT IS INTENDED FOR THE SOLE USE OF THE ORIGINAL PURCHASER, AND NONE OTHER, SUBJECT TO WHAT IS SET OUT IN THE PARAGRAPH BELOW.

THE ABOVE PROVISIONS DO NOT PROHIBIT THE ORIGINAL PURCHASER FROM INCLUDING THIS UNMODIFIED PRODUCT IN ANY REPORT, OPINION, APPRAISAL OR OTHER ADVICE PREPARED BY THE ORIGINAL PURCHASER AS PART OF THE ORIGINAL PURCHASER APPLYING PROFESSIONAL, CONSULTING OR TECHNICAL EXPERTISE FOR THE BENEFIT OF CLIENT(S).

This is **Exhibit "Z"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'Anthony Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

May 11, 2018

Via Email to: darren@mwsrig.com

Mustang Well Services Ltd.
KKSr Enterprises Ltd.
Complete Oilfield Manufacturing Inc.
Reaction Oilfield Supply (2012) Ltd.
MRBD Ltd.

Each c/o
Mustang Well Services Ltd.
910 7 Ave SW #1100
Calgary, AB T2P 3N8

Attention: Michael Kallal and Royden Wideman

Dear Sirs:

Re: Outstanding Indebtedness of Mustang Well Services Ltd. ("Mustang"), KKSr Enterprises Ltd. ("KKSr"), Complete Oilfield Manufacturing Inc. ("Complete"), and Reaction Oilfield Supply (2012) Ltd. ("Reaction" together with Mustang, KKSr, Complete and Reaction the "Borrowers") to ATB Financial ("ATB") as cross guaranteed by Mustang, KKSr, Complete, Reaction and KKSr and guaranteed by MRBD Ltd. ("MRBD", and together with the Borrowers as guarantors, the "Guarantors")

Reference is made to the amended and restated letter loan agreement dated July 26, 2017 between ATB as lender, the Borrowers as borrower, and the Guarantors as guarantors, as amended by (i) a letter agreement dated August 10, 2017; (ii) a letter agreement dated October 23, 2017; (iii) a third amendment to loan agreement dated December 15, 2017; and (iv) a fourth amendment to loan agreement dated March 9, 2017 (collectively, the "**Loan Agreement**"). Unless otherwise defined in this letter, all capitalized terms will have the meaning ascribed to them in the Loan Agreement.

The Borrowers have also breached various covenants contained in under the Loan Agreement, the particulars of which are summarized in **Schedule A** to this letter. The indebtedness of the Borrowers under the Loan Agreement is payable on demand.

According to ATB's records, the Borrowers are indebted or otherwise liable to ATB for the amounts set out in **Schedule B** to this letter under the Loan Agreement (collectively, the "**Indebtedness**"). In connection with guarantees delivered thereto, the Borrowers are jointly and severally liable for the Indebtedness under the Loan Agreement.

The Guarantors have additionally guaranteed the repayment of the Indebtedness under the guarantees listed on **Schedule C** (collectively, the "**Guarantees**").

ATB Corporate
Financial Services™

600, 585 8th Avenue SW Calgary, AB T2P 1G1

CAPITAL SOLUTIONS | FINANCIAL MARKETS | CASH MANAGEMENT

ATB hereby demands payment in full of the Indebtedness from the Borrower and the Guarantors. Interest on the Indebtedness has accrued and will continue to accrue to the date of payment at the rate set out in Schedule B to this letter. The exact amount of the Indebtedness and interest which will have accrued to any date of payment shall be obtained by contacting ATB. The Borrowers and the Guarantors will also be required to pay ATB's legal and other expenses in connection with the Indebtedness.

This letter constitutes a demand for payment and acceleration of payment under the terms and conditions of the Loan Agreement and the terms and conditions of all security (the "**Security**") held by ATB directly or indirectly for any of the Indebtedness, including all loan agreements, promissory notes, the Independent Guarantees and other agreements governing the Indebtedness, and under all security instruments held for the Indebtedness, and is made without prejudice to (a) ATB's rights to make such further and other demands as it shall see fit for any other indebtedness or under any other security, and (b) ATB's rights to provide further and other notices of default.

Unless payment or arrangements satisfactory to ATB for payment of the Indebtedness are made by no later than **11:59 p.m. on May 22, 2018 (MST)**, ATB may take any further steps that it deems necessary to recover payment of the Indebtedness. These steps shall include the enforcement of the Security by way of the appointment of an interim receiver, court appointed receiver and manager, a private receiver and manager, or an agent under the Security. ATB expressly reserves the right to take any steps it deems advisable to protect its position prior to that date.


We enclose notices of intention issued by ATB under Section 244 of the *Bankruptcy and Insolvency Act* (Canada) for the Borrowers and each of the Independent Guarantors.

ATB expressly reserves its rights and remedies with respect to any defaults that shall now exist or hereafter arise under the Loan Agreement or the Security.

Yours truly,

ATB Financial

By:



Name:

Title:

**Trina Holland
Director**

ACKNOWLEDGEMENT AND CONSENT

Each of the undersigned hereby acknowledge receipt of a Notice of Intention to Enforce Security issued by ATB pursuant to subsection 244(1) of the *Bankruptcy and Insolvency Act* (Canada) in respect of the Security granted by the Borrowers in favour of ATB and the Guarantees and Security granted by the Guarantors and hereby consent to ATB enforcing the Security and the Independent Guarantees prior to the expiry of the ten (10) day period stipulated in such notice or at any time thereafter. The undersigned hereby waive all cure periods to which it may be entitled under the Credit Agreement, the Security or the Guarantees, as applicable.

Dated May , 2018.

Borrowers and Guarantors:

Mustang Well Services Ltd.

By:

Name:

Title:

KKSR Enterprises Ltd.

By:

Name:

Title:

Complete Oilfield Manufacturing Inc.

By:

Name:

Title:

Reaction Oilfield Supply (2012) Ltd.

By:

Name:

Title:

Guarantor only:

MRBD Ltd.

By:

Name:

Title:

Schedule "A"
Covenant Breaches

1. The principal amount outstanding under Credit Facility #1 was \$3,250,000, which exceeded the maximum limit of \$2,450,000 by \$800,000, and as a result of a precipitous decline in the accounts receivable of Mustang, exceed the 75% margin by approximately \$1,700,000, as a result of which Mustang has no ability to make further draws to fund its operations.
2. The capital expenditures of Mustang for the fiscal year ending December 31, 2017 were \$672,910, whereas under section 11(b) of the Loan Agreement, the Borrowers and Guarantors covenanted and agreed that Mustang would not expend more than \$650,000 in any fiscal year on capital expenditures.
3. On December 31, 2017, the actual EBITDA (as defined in the Loan Agreement) was \$2,189,742 and the forecast EBITDA was \$2,750,000, which actual EBITDA was approximately 79.6% of the forecasted EBITDA, whereas under section 11(c) of the Loan Agreement, the Borrowers and Guarantors covenanted and agreed that Mustang would not permit actual EBITDA to fall below 85% of forecasted EBITDA on a year to date basis.

Schedule "B"
Guarantees


1. Continuing guarantee dated October 15, 2013 by Mustang of the indebtedness of KKSR to ATB up to \$2,000,000.
2. Continuing guarantee dated June 24, 2014 by Mustang of all of the indebtedness of Complete to ATB.
3. Continuing Guarantee dated June 24, 2014 by KKSR of all of the indebtedness of Mustang to ATB.
4. Continuing Guarantee dated August 25, 2015 by Complete of all of the indebtedness of Mustang to ATB.
5. Continuing Guarantee dated April 11, 2013 by Reaction of all of the indebtedness of Mustang to ATB.
6. Continuing Guarantee dated April 11, 2013 by MRBD of all of the indebtedness of Mustang to ATB.

Schedule "C"
Indebtedness as of May 9, 2018

| | | |
|---|-----------------|----------------------------|
| <u>Complete Oilfield Manufacturing Inc. Facilities</u> | | |
| Total | \$350,664.78 | |
| Per diem | \$61.85 | |
| MasterCard | | |
| Total | \$17,171.00 | |
| Overdrawn Balance on Deposit Account | | |
| Total | \$25,106.27 | |
| <i>Total All Complete Oilfield Facilities</i> | | \$392,942.05 |
| <u>KKSR Enterprises Ltd. Facilities</u> | | |
| Total | \$1,888,363.45 | |
| Per diem | \$280.79 | |
| Overdrawn Balance on Deposit Account | | |
| Total | \$10,006.06 | |
| <i>Total All KKSR Facilities</i> | | \$1,898,369.51 |
| <u>Mustang Well Services Ltd. Facilities</u> | | |
| Total | \$14,815,050.80 | |
| Per diem | \$2,718.32 | |
| MasterCard | | |
| Total | \$88,805.85 | |
| <i>Total All Mustang Facilities</i> | | \$14,903,856.65 |
| <u>Reaction Oilfield Supply (2012) Ltd. Facilities</u> | | |
| Total | \$268,821.38 | |
| Per diem | \$47.40 | |
| MasterCard | | |
| Total | \$55,189.02 | |
| Total | \$1,774.48 | |
| <i>Total All Reaction Facilities</i> | | \$325,784.88 |
| TOTAL OF ALL INDEBTEDNESS AS AT MAY 9, 2018 | | \$17,520,953.09 |

The Indebtedness as at any proposed date of payment will also include any fees, commissions, costs, expenses and other amounts that have been incurred by ATB for the account of the Borrowers, any adjustment resulting from any revolvment or fluctuations in the borrowings, any commissions and other fees for letters of credit and accrued and unpaid interest from now to the date of payment at the rates set out in the Credit Agreement. The amount owing for any letters of credit shall be determined using the applicable interest rate as at any proposed date of payment.

This is **Exhibit "AA"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

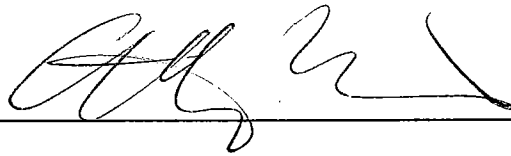A handwritten signature in black ink, appearing to read 'A. Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

BANKRUPTCY AND INSOLVENCY ACT

FORM 86

Notice of Intention to Enforce Security
(Rule 124)

**TO: Mustang Well Services Ltd.
KKSr Enterprises Ltd.
Complete Oilfield Manufacturing Inc.
Reaction Oilfield Supply (2012) Ltd.
MRBD Ltd.
(collectively, the "Insolvent Persons, and each an "Insolvent Person")**

Take notice that:

1. ATB Financial, a secured creditor of each of the Insolvent Persons, intends to enforce its security on the property of each of the Insolvent Persons described below:

All of the property, assets, and undertaking charged by the security described in paragraph 2 of this Notice.
2. The security that is to be enforced is in the form of:

See Schedule A.
3. The total amount of indebtedness secured by the security and owed by each of the Insolvent Persons is:

See Schedule B.
4. The secured creditor will not have the right to enforce the security until after the expiration of the 10-day period after this notice is sent unless the Insolvent Persons consent to an earlier enforcement.

DATED at Calgary this 11th day of May, 2018.

ATB Financial

Per: _____

Name:

Title:



**Trina Holland
Director**

SCHEDULE A
SECURITY DOCUMENTS

Security Granted by Mustang Well Services Ltd.

- (a) General security agreement dated March 18, 2013 under which Mustang Well Services Ltd. granted a security interest over all present and after acquired personal property.

Security Granted by KKS SR Enterprises Ltd.

- (a) General security agreement dated October 15, 2013 under which KKS SR Enterprises Ltd. ("KKS SR") granted a security interest over all present and after acquired personal property.
- (b) Land mortgage dated October 15, 2013 (the "**Mortgage**") in the principal sum of \$2,800,000.00 granted by KKS SR over the lands (the "**KKS SR Lands**") legally described as (i) Plan 9922651, Lot 3, excepting thereout all mines and minerals, having an area of 1.62 hectares (4 acres) more or less; and (ii) Plan 1323928, Block 1, Lot 9, excepting thereout all mines and minerals, having an area of 2.44 hectares (6.03 acres) more or less.
- (c) General assignment of leases and rents dated October 15, 2013 by KKS SR over the KKS SR Lands.

Security Granted by Complete Oilfield Manufacturing Inc.

- (a) General security agreement dated June 24, 2014 under which Complete Oilfield Manufacturing Inc. granted a security interest over all present and after acquired personal property.

Security Granted by Reaction Oilfield Supply (2012) Ltd.

- (a) General security agreement dated April 30, 2015 under which Reaction Oilfield Supply (2012) Ltd. granted a security interest over all present and after acquired personal property.

Security Granted by MRBD Ltd.

- (a) General security agreement dated April 11, 2013 under which MRBD Ltd. granted a security interest over all present and after acquired personal property and a floating charge on all lands.

SCHEDULE B
INDEBTEDNESS OF EACH OF THE INSOLVENT PERSONS ON A
JOINT AND SEVERAL BASIS
as at May 9, 2018

Complete Oilfield Manufacturing Inc. Facilities
Independent Business Loan - Revolving
Total \$350,664.78
Per diem \$61.85
MasterCard
total \$17,171.00
Overdrawn Balance on Deposit Account
total \$25,106.27
Total All Complete Oilfield Facilities \$392,942.05

KKSR Enterprises Ltd. Facilities
Independent Business Loan -- Revolving and Business Term Loan
Total \$1,888,363.45
Per diem \$280.79
Overdrawn Balance on Deposit Account
Total \$10,006.06
Total All KKSR Facilities \$1,898,369.51


Mustang Well Services Facilities
Independent Business Loan - Revolving and Equip. Fin. - Term Loan
Total \$14,815,050.80
Per diem \$2,718.32
MasterCard
Total \$88,805.85
Total All Mustang Facilities \$14,903,856.65

Reaction Oilfield Supply Facilities
Independent Business Loan - Revolving
Total \$268,821.38
Per diem \$47.40
MasterCard
Total \$55,189.02
Overdrawn Balance on Deposit Account
Total \$1,774.48
Total All Reaction Facilities \$325,784.88

TOTAL OF ALL INDEBTEDNESS AS AT \$17,520,953.09
MAY 9, 2018

The Indebtedness as at any proposed date of payment will also include any fees, commissions, costs, expenses and other amounts that have been incurred by the Secured Creditor for the account of the Insolvent Persons, any adjustment resulting from any revolvment or fluctuations in the borrowings, any commissions and other fees for letters of credit and accrued and unpaid interest from now to the date of payment at the rates set out in the Credit Agreement. The amount owing for any letters of credit shall be determined using the applicable interest rate as at any proposed date of payment.

This is **Exhibit "BB"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

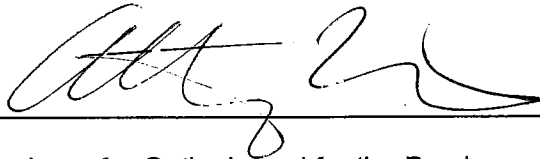A handwritten signature in black ink, appearing to read 'Anthony Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

ACKNOWLEDGEMENT AND CONSENT


Each of the undersigned hereby acknowledge receipt of a Notice of Intention to Enforce Security issued by ATB pursuant to subsection 244(1) of the *Bankruptcy and Insolvency Act* (Canada) in respect of the Security granted by the Borrowers in favour of ATB and the Guarantees and Security granted by the Guarantors and hereby consent to ATB enforcing the Security and the Independent Guarantees prior to the expiry of the ten (10) day period stipulated in such notice or at any time thereafter. The undersigned hereby waive all cure periods to which it may be entitled under the Credit Agreement, the Security or the Guarantees, as applicable.

Dated May , 2018.

Borrowers and Guarantors:

Mustang Well Services Ltd.

By:



Name: M. Kallal

Title: CEO

KKSR Enterprises Ltd.

By:




Name: M. Kallal

Title: CEO

Complete Oilfield Manufacturing Inc.

By:



Name: M. Kallal

Title: CEO

Reaction Oilfield Supply (2012) Ltd.

By:




Name: M. Kallal

Title: CEO

Guarantor only:

MRBD Ltd.

By:



Name: M. Kallal

Title: CEO

This is **Exhibit "CC"** referred to in the Affidavit of
Trina Holland, Sworn before me this 14th day of May 2018

A handwritten signature in black ink, appearing to read 'Anthony Mersich', written over a horizontal line.

A Commissioner for Oaths in and for the Province of Alberta

Anthony Mersich
Barrister and Solicitor

COURT FILE NUMBER 1801-
COURT COURT OF QUEEN'S BENCH OF ALBERTA
JUDICIAL CENTRE CALGARY

Clerk's Stamp

IN THE MATTER OF THE RECEIVERSHIP OF MUSTANG
WELL SERVICES LTD., KKSER ENTERPRISES LTD.,
COMPLETE OILFIELD MANUFACTURING INC., REACTION
OILFIELD SUPPLY (2012) LTD. and MRBD LTD.

APPLICANT(S) ATB FINANCIAL
RESPONDENT(S) MUSTANG WELL SERVICES LTD., KKSER ENTERPRISES LTD.,
COMPLETE OILFIELD MANUFACTURING INC., REACTION
OILFIELD SUPPLY (2012) LTD. and MRBD LTD.
DOCUMENT CONSENT TO ACT AS RECEIVER

ADDRESS FOR SERVICE AND CONTACT
INFORMATION OF PARTY FILING THIS DOCUMENT
Gowling WLG (Canada) LLP
1600, 421 – 7th Ave. S.W.
Calgary, AB T2P 4K9

Attention: Tom Cumming // Anthony Mersich
Phone: 403-298-1938 // 403-298-1831
Facsimile: 403-695-3538
email: Tom.Cumming@gowlingwlg.com
Anthony.Mersich@gowlingwlg.com

FTI Consulting Canada Inc. does hereby consent to act as receiver of the assets, properties and undertakings of Mustang Well Services Ltd., KKSER Enterprises Ltd., Complete Oilfield Manufacturing Inc. and Reaction Oilfield Supply (2012) Ltd. if so ordered by this Honourable Court.

DATED this 14th day of May, 2018.

FTI CONSULTING CANADA INC.

Per: _____
Name: _____

